MILITARY SPECIFICATION SHEET

CABLES, FIBER OPTICS, TYPE I, CLASS 2, COMPOSITION A,
ATTENUATION RANGE A, SINGLE FIBER FOR (METRIC)

This amendment forms a part of Military Specification DOD-C-85045/1, dated 10 November 1981, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

TITLE: Delete and substitute new title as printed above.

FIGURE 1, delete chart and substitute the following:

"

Part number	Dimension (µm)		
	A	B	C
D85045/01-01 1/	50 ±4	125 ±4	900 ±50
D85045/01-02 1/	50 ±4	125 ±4	500 ±50
D85045/01-03	50 ±3	125 ±3	500 ±50
D85045/01-04	100 ±3	140 ±3	500 ±50

1/ Part number D85045/01-03 supersedes part numbers D85045/01-01 and D85045/01-02"

PAGE 2

Delete figure 2 and substitute new figure 2 as printed on page 2 of this amendment.

PAGE 3


After requirement tensile strength of fiber, add the following new requirement:

"Optical launch conditions: Optical launch conditions shall be of the overfill type, using an LED of bandwidth close to and centered on the bandwidth of the fiber. The optics shall be able to produce an imaged launch spot of diameter greater than the core diameter and a launch numerical aperture greater than the specified fiber numerical aperture. Position the fiber under test in the input beam and move until the position that produces maximum power to the detector is obtained. Mode filters and cladding-mode strippers shall not be used."

After requirement fluid immersion, add the following new requirement:

"Ordering restrictions: Fibers under this specification shall be tested with the applicable cable(s) proposed for qualification and shall only be supplied as part of the qualified cable(s). The individual fibers will not be acquired separately, and the fiber part numbers will not be listed on the Qualified Parts List."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:05Z
Check the source to verify that this is the current version before use.

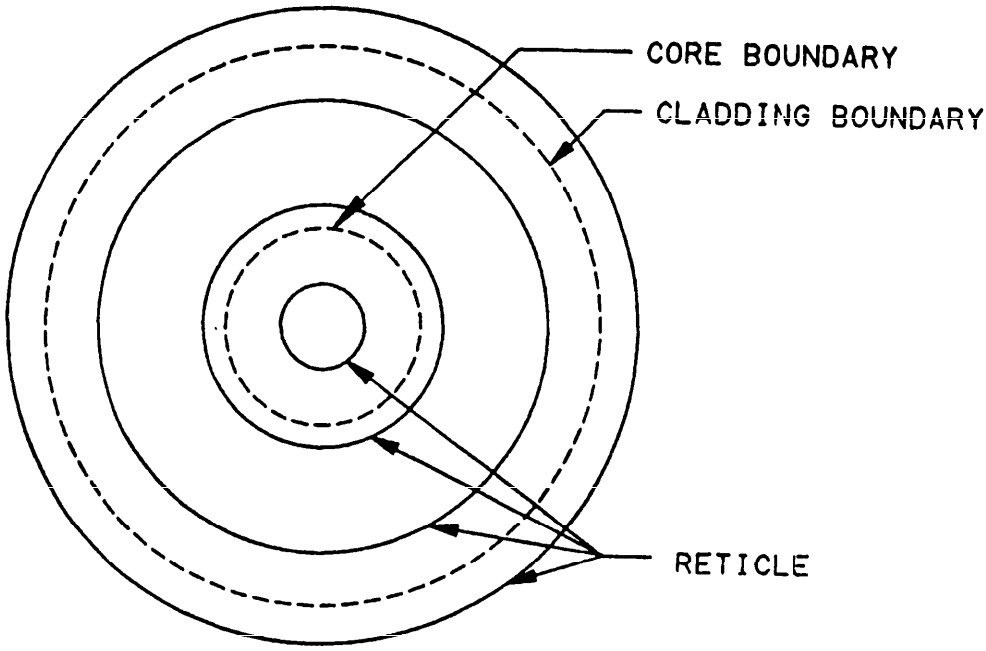

CIRCLE	DIAMETER OF CIRCLE	
	D85045/1-03	D85045/1-04
INNER	47	97
SECOND	53	103
THIRD	122	137
FOURTH	128	143

NOTE: Dimensions are in micrometers.

FIGURE 2. Tolerance fields.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:05Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS
Air Force - 11, 99
DLA - ES

User activities:
Air Force - 17

Preparing activity:
Air Force - 85

(Project 6015-0003-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:05Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:05Z
Check the source to verify that this is the current version before use.