MILITARY SPECIFICATION SHEET

MAINTENANCE KITS, FIBER OPTIC CONNECTORS, TERMINI, AND CONNECTOR AND CABLE ACCESSORIES, FIBER TERMINATING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the *Department of Defense Index of Specifications* and Standards (DODISS) specified in the solicitation: MIL-K-83533.

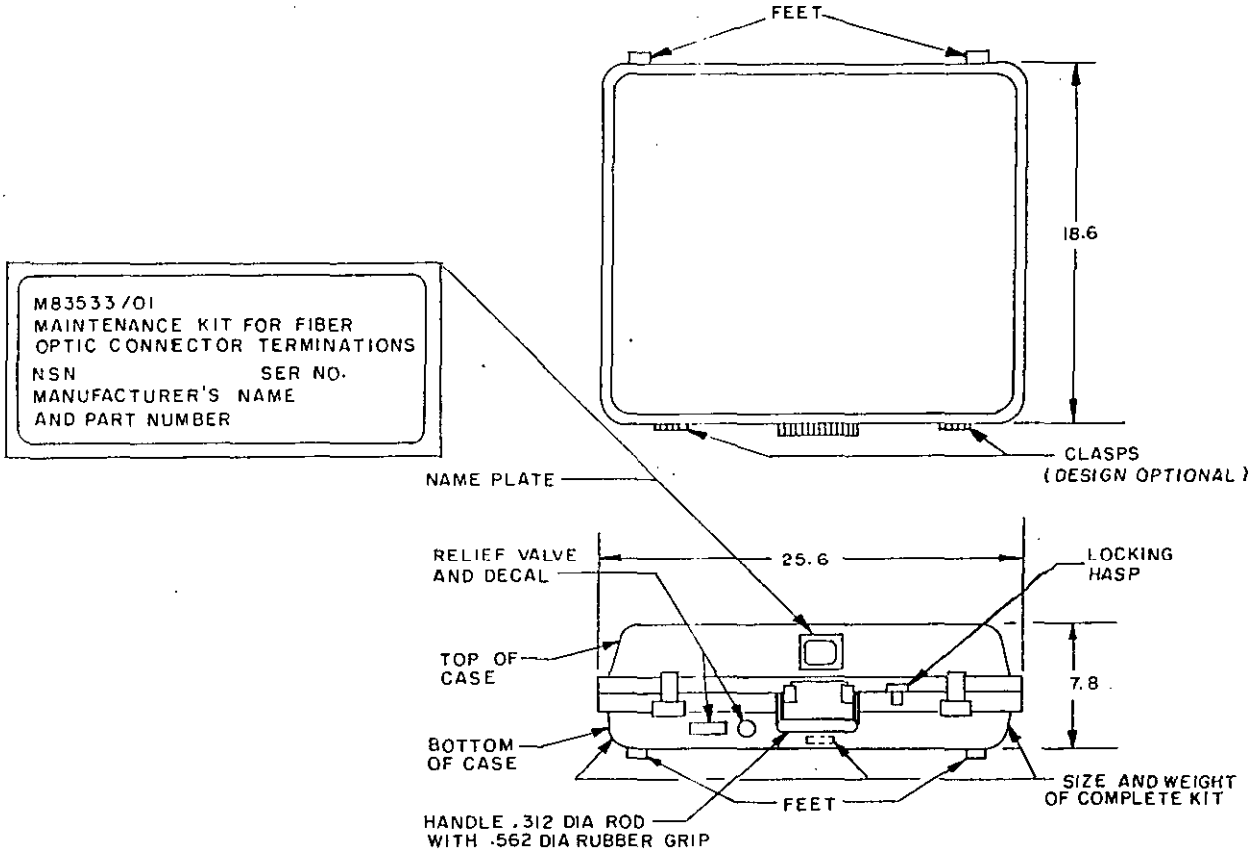


FIGURE 1. Tool kit case.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figures 1 through 3.

Materials:

Case: Fiberglass with an aluminum frame (Brooks and Perkins skydyne) (CAGE 74284) part number SK68100 or equal, olive drab in accordance with FED-STD-595. (Yellow for Navy use.)

Inside cover: Aluminum alloy, clear anodized in accordance with MIL-A-8625.

Instruction sheets and content charts: White vinyl 0.020 inch (0.51 mm) thick.

Insert and retainer pad: Fire retardant 1-3/4 inch foamed polyethylene in accordance with PPP-C-1752; color is optional.

Clasps, handles, hinges, and locking hasp: Plated to resist corrosion.

Clasps: Draw pull type with provision for using a locking device.

Binder: Binder, looseleaf, six rings 0.562 inch (14.27 mm) +0.062 inch (1.57 mm) I.D., securely riveted to inside of cover.

Nameplate: In accordance with MIL-P-19834.

Cover: A retainer pad shall be permanently affixed to the underside with contents chart insert and a latching mechanism shall be provided so that when the cover is closed the tools will be captivated in their respective positions.

Manual air pressure relief valve: Located adjacent to handle. Decal with "OPEN BEFORE AIRFLIGHT", "CLOSE AFTER AIRFLIGHT" shall be attached to case adjacent to valve.

Rubber feet: Provided on the back and bottom of case.

Instruction sheets and contents charts: Lettering shall be legible and protected with a transparent coating.

Contents charts: Pressure sensitive adhesive backing, show the insert cavity configurations and respective tool PINs; a list of NSN's will also be supplied.

Part or Identifying Number (PIN): For components of kit, see table I. For kit, application, and pin, see table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.

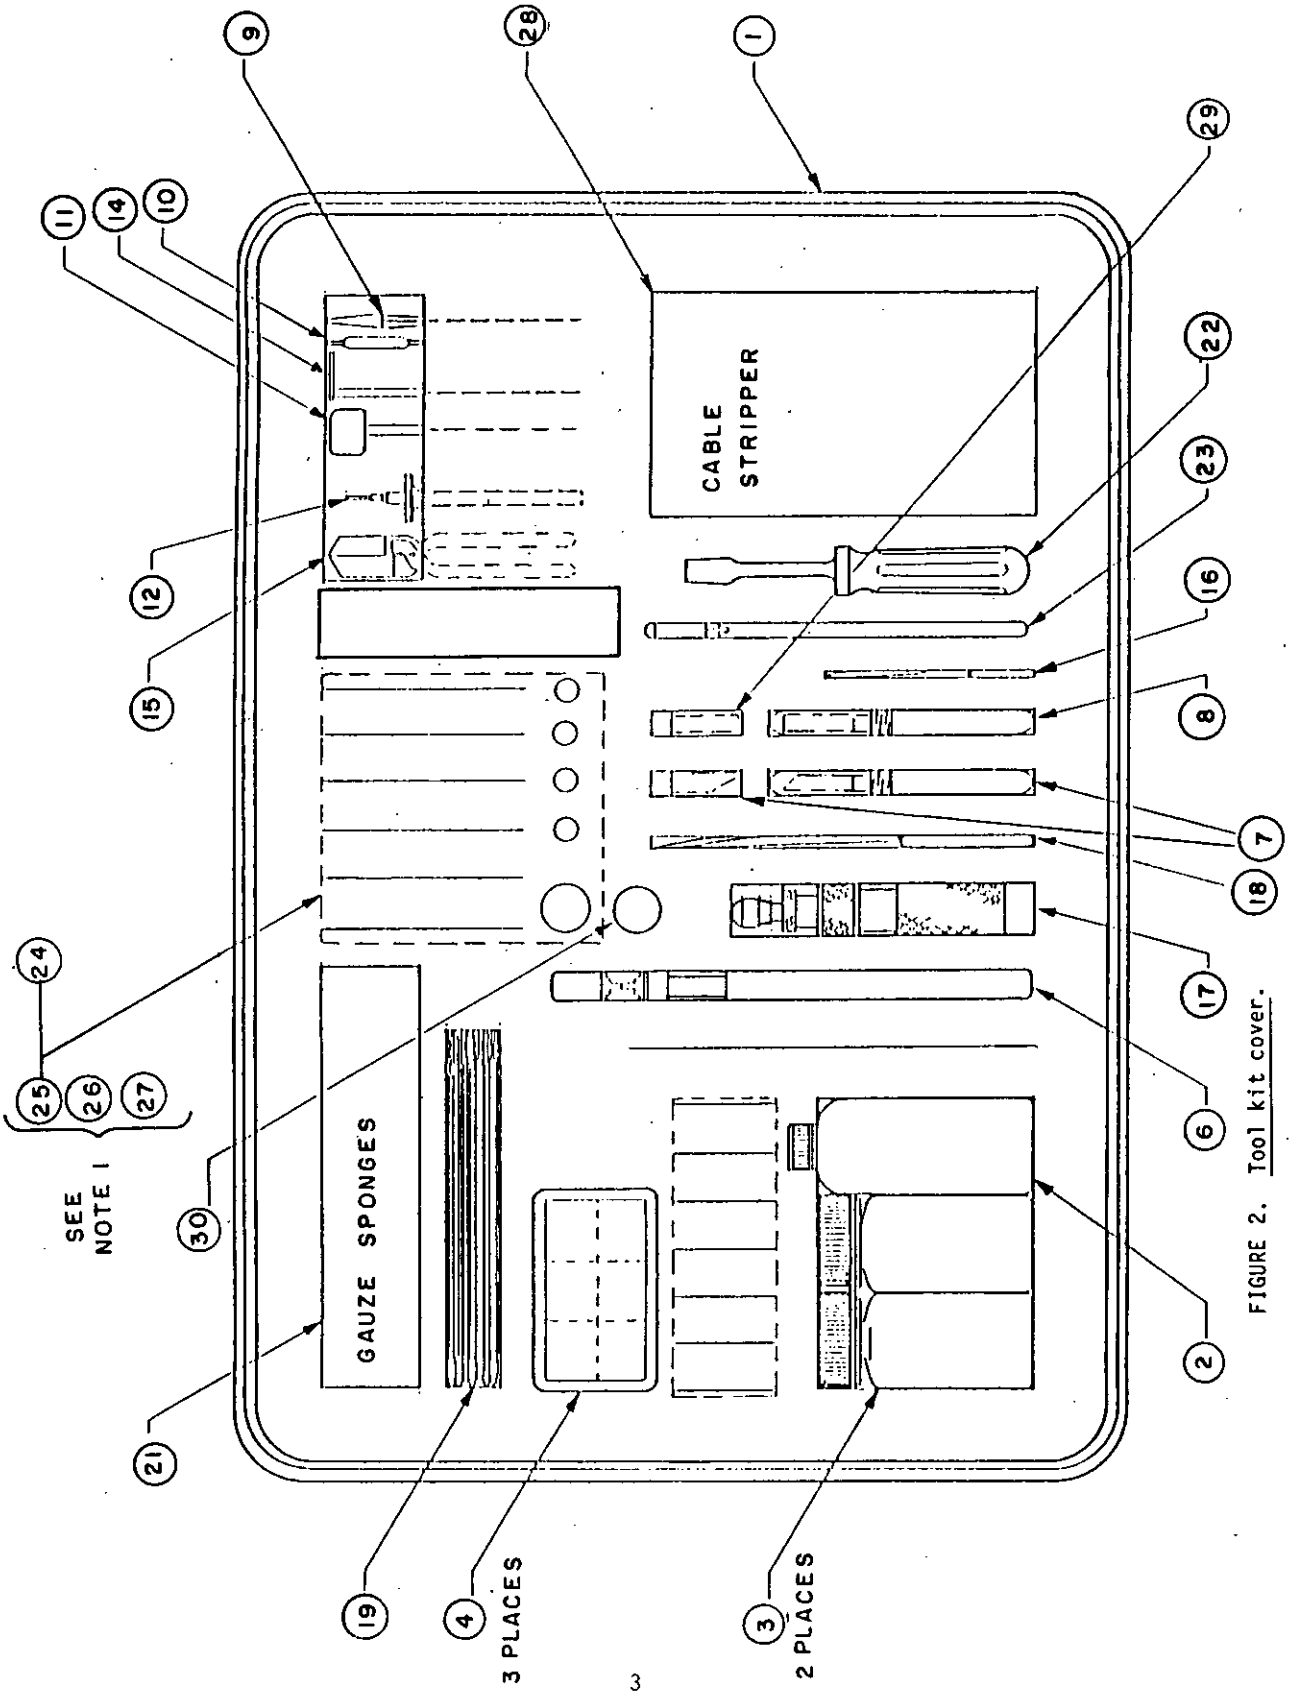


FIGURE 2. Tool kit cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.

Tabulation	
Connector product	Sub-tool kit no.
Single channel	M83533/1-19
2/4 channel	M83533/1-18
6 channel	M83533/1-17
8, 10, 12 channel	M83533/1-16
MIL-C-28876	M83533/1-15

NOTES:
1. This area is reserved for special tools required for the specific type of connector to be terminated. Tools in this area may be purchased separately. See tabulation block.
2. Tools provided in this kit may be ordered separately by PINs listed in the parts list.
3. Epoxy kit must be purchased separately due to shelf life restrictions.
4. Tabulation is located inside tool kit cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.

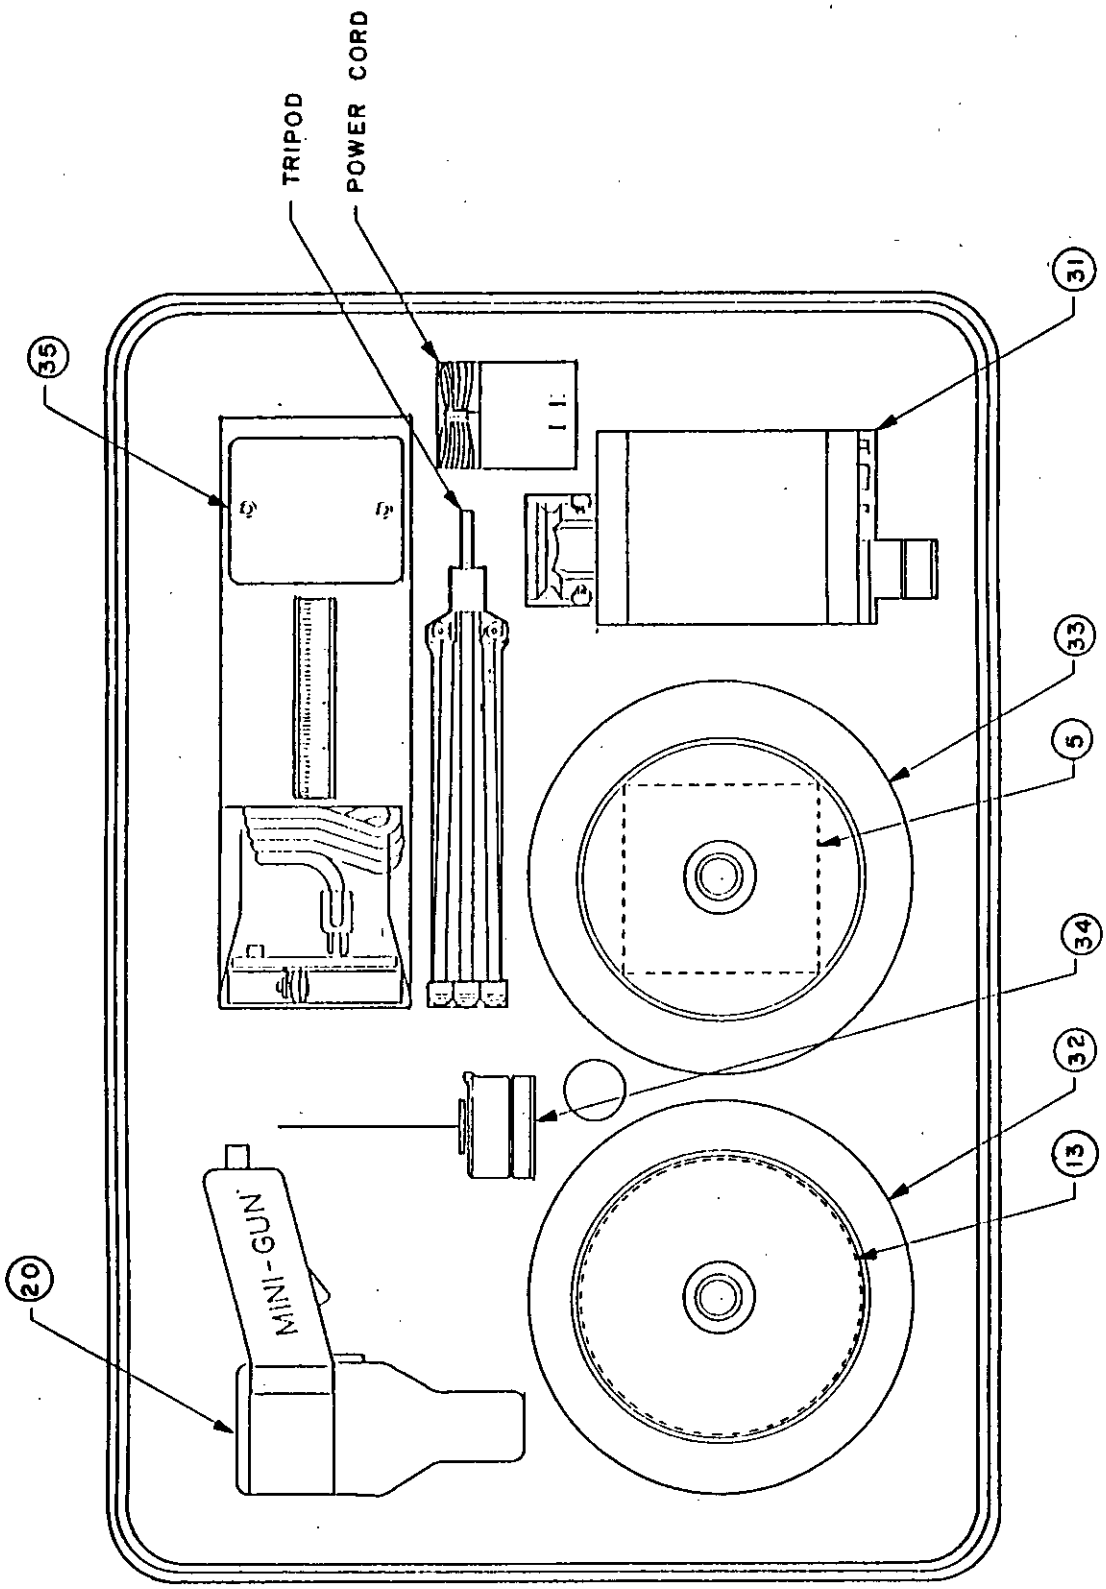


FIGURE 3. Tool kit base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.

TABLE I. Contents chart. 1/

M83533/1-01X	M83533/1-02X	M83533/1-03X	M83533/1-04X	M83533/1-05X	Individual Part or Identifying Number (PIN)	Component	Drawing number
1	1	1	1	1	M83533/1-07	Curing fixture, Hughes Aircraft (Acft) P/N 4565035H or equivalent	35
1	1	1	1	1	M83523/6-01	Polishing fixture	34
1	1	1	1	1	M83533/1-09	Phenolic polishing lapping assy Hughes Acft P/N 4569634H or equivalent	33
1	1	1	1	1	M83533/1-10	Diamond polishing lapping assy Hughes Acft P/N 456933H or equivalent	32
1	1	1	1	1	M83525-1	Optical microscope assy	31
1	1	1	1	1	M83533/1-12	Adapter, hex tool assy Hughes Acft P/N 4569744-3H or equivalent	30
1	1	1	1	1	M83533/1-13	Broach, contact, (6/pkg) Hughes Acft P/N 1143133S or equivalent	29
1	1	1	1	1	M83523/16-19	Stripper, cable	28
1	---	---	---	---	M83533/1-15	MIL-C-28876 conn. tools Hughes Acft P/N 4569365H or equivalent	27
---	1	---	---	---	M83533/1-17	6 ch. conn. herm. (MIL-C-83526) tools Hughes Acft P/N 4569363H or equivalent	26
---	---	1	---	---	M83533/1-18	2/4 ch. herm. conn. (MIL-C-83526) tools Hughes Acft P/N 4569362H or equivalent	25
---	---	---	1	---	M83533/1-19	Single ch. conn. (MIL-C-83522) tools Hughes Acft P/N 4569361H or equivalent	24
1	1	1	1	1	M83533/1-20	Wrench, 8 in., adjustable, Hughes Acft P/N 4569732H or equivalent	23
1	1	1	1	1	M83533/1-21	Screwdriver, flat tip, 3 in. shaft, Master-Carr P/N 5682A33 or equivalent	22
1	1	1	1	1	M83533/1-22	Pads, gauze (1/pkg), 2x2 in., Hughes Acft P/N 4569754 or equivalent	21
1	1	1	1	1	M83533/1-23	Heat gun assy Hughes Acft P/N 4569049H or equivalent	20
1	1	1	1	1	M83533/1-24	Applicators, cotton tip (1/pkg) Hughes Acft P/N 4569754 or equivalent	19
1	1	1	1	1	M83533/1-25	Shears, kevlar Hughes Acft P/N 1147989S or equivalent	18
---	1	---	---	---	M83523/7-03	Wrench, torque	17
---	---	1	---	---	M83523/7-04	Wrench, torque	
1	---	---	---	---	M83523/7-B11, /7A13, /7A15	Wrench, torque, with Adapter and holder	
1	1	1	1	1	M83523/1-27	Scissors, kevlar, 5 in., Hughes Acft P/N 1147988S or equivalent	16
1	1	1	1	1	M83533/1-28	Tool, stripping, Hughes Acft P/N 1143139-XXXS or equivalent	15
1	1	1	1	1	M81969/49-01	Insertion tool, contact	14
1	1	1	1	1	M83533/1-30	Disks, polishing, (15/pkg) Hughes Acft P/N 1143272S or equivalent	13
1	1	1	1	1	M81969/22-01	Removal tool, contact	12

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.

TABLE I. Contents chart - Continued. 1/

M83533/1-01X	M83533/1-02X	M83533/1-03X	M83533/1-04X	M83533/1-05X	Individual Part or Identifying Number (PIN)	Component	Drawing number
1	1	1	1	1	M81969/46-01	Insertion tool, contact	11
1	1	1	1	1	M81969/48-01	Insertion/removal tool, alignment sleeve Hughes Acft P/N 1143895S or equivalent	10
1	1	1	1	1	M83533/1-34	Tweezers, 4.5 in., Hughes Acft P/N 1147987S or equivalent	9
1	1	1	1	1	M83523/3-01	Knife, carbide Hughes Acft P/N 1147978S or equivalent	8
1	1	1	1	1	M83533/1-36	Knife, trimming, Hughes Acft P/N 1147992S or equivalent	7
1	1	1	1	1	M83533/1-38	HX4, crimp tool	6
1	1	1	1	1	M83533/1-39	Lubricant, O-ring Hughes Acft P/N 4569753 or equivalent	5
1	1	1	1	1	M83533/1-40	Container, spare parts Hughes Acft P/N 4569747 or equivalent	4
2	2	2	2	2	M83533/1-41	Containers, solvent, 8 oz. Hughes Acft P/N 4569515 or equivalent	3
1	1	1	1	1	M83533/1-42	Bottle, polishing, 6 oz. Hughes Acft P/N 4569738 or equivalent	2
1	1	1	1	1	M83533/1-43 2/	Case, Brooks and Perkins (skydyne) P/N 68100 (olive drab)	1
1	1	1	1	1	M83533/1-44-1 2/	Case, Brooks and Perkins (skydyne) P/N 68100 (yellow)	1

1/ For drawing number references, see figures 2 and 3.
2/ X could be either A or B. A is an olive drab case, B is a yellow case.

TABLE II. Application table.

Connector specification	Connector type	Maintenance kit Part or Identifying Number (PIN)
MIL-C-28876	Multichannel	M83533/1-01
MIL-C-83526	6 channel	M83533/1-02
MIL-C-83526	2 and 4 channel	M83533/1-03
MIL-C-83522	Single channel	M83533/1-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, GL, MI
Navy - AS, OS, SH
Air Force - 11, 12, 13, 14, 17, 19, 80, 99
DLA - ES

User activities:
Army - AV, ME
Navy - MC
Air Force - 70, 82, 84, 90

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6080-0002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.