MIL-M-36997 (DSA-DM)
7 August 1973

MILITARY SPECIFICATION

MAILING CASE SECTION, MICROSCOPE SLIDE, Chipboard, 12s

This limited coordination Military Specification has been prepared by the Defense Personnel Support Center based upon currently available technical information, but it has not been approved for promulgation as a coordinated document. It is subject to modification. However, pending its promulgation as a coordinated Military Specification, it may be used in procurement.

1. SCOPE

1.1 This specification covers one type of single cavity mailing case section suitable for mailing plain, 25 by 75 millimeters (mm.) microscope slides.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Box, Setup.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:44Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. The chipboard components shall be as indicated in Figure 1. The adhesive used shall have sufficient strength to make a firm bond between the chipboard components.

3.2 Construction. The mailing case section shall conform to Figure 1 for design and dimensions. The folding portion shall be of one piece and shall form the cover and center section of the mailing case. The inside center section shall be die cut to provide a cavity (slot) for accepting a 25 x 75 mm. microscope slide. One end of the cavity (slot) shall have a thumb groove cut-out for easy removal of the slide. The microscope slide within the cavity (slot) shall be supported by a one-piece backing glued to the border surrounding the cavity (slot).

3.3 Performance. When tested in accordance with 4.4.1, the cover of the mailing case section shall be capable of repeated openings and closings without any evidence of the fold deteriorating (i.e. tears or separation of cover from center section) or delamination of the chipboard components.

3.4 Marking. The outside of the cover shall have suitable permanent marking(s) (e.g. "TOP") to facilitate identification of relative positions of cover and inserted slide in a closed mailing case section.

3.5 Workmanship. Workmanship shall be first class throughout. The mailing case sections shall be free from defects which detract from their appearance or may impair their serviceability. The chipboard components of the case shall be free of delamination, cracks, bends, warping, dents or distortion. In closure the cover shall fold flat over the center section. The mailing case sections shall be free from dirt, grease or other foreign matter. The cavity (slot) and outer edges of the mailing case sections shall be cut clean and smooth without any feather edges.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:44Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, or auditory, investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and Table I. The unit of product shall be the individual mailing case section. No more than three mailing case sections shall be selected from a unit package (see 5.1).

Table I Sampling for examination

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	1.0
Minor defects	II	2.5
For dimensional examination	S-2	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and Table II. The unit of product shall be the individual mailing case section. No more than three mailing case sections shall be selected from a unit package (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:44Z
Check the source to verify that this is the current version before use.

Table II Sampling for tests

Characteristic	Requirement	Test	Inspection level *
Flexibility of cover	3.3	4.4	S-2

* Acceptance number shall be zero.

4.3 Examination. The mailing case section shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with Table III. Examination shall not be restricted to possible defects listed in the following table.

Table III Classification of defects

Categories	Defects
Major	
101	Mailing case not free of delamination, cracks, bends, warping, tears, dents or distortion.
102	Folding portion not properly bonded to backing portion.
103	Folding line not properly or not uniformly formed to permit cover to close flat and/or to properly enclose center section.
104	Folding line not present or not free of cuts or tears.
105	Cavity (slot) not cut clean and smooth.
Minor	
201	Cavity (slot) not free of feather edge(s).
202	Outer edges of folding and/or backing portions not cut clean and smooth or not free of feather edge(s).
203	Chipboard components not free from dirt, grease or other foreign matter.
204	Marking on cover not complete or permanent.

4.3.2 Dimensional examination. The mailing case section shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Flexibility of cover. The cover of the mailing case shall be repeatedly opened a full 180 degrees and then closed flat against the center section ten times. The folding line shall then be checked for any evidence of deterioration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:44Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One package containing 12 mailing case sections, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit, intermediate and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	12 units	72 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Unit package shall be a box of appropriate size and design constructed in accordance with PPP-B-566 or PPP-B-676, except commercial colors will be acceptable. Closure shall be adequate to prevent accidental opening under normal handling.

5.1.3.2 Intermediate package. Intermediate package shall be a box of appropriate size and design constructed in accordance with PPP-B-566 or PPP-B-676, except that commercial colors will be acceptable; or PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent accidental opening under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2;

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:44Z
Check the source to verify that this is the current version before use.

PPP-B-636, class weather-resistant. grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof in accordance with 30.4 of PPP-B-636.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by method II of PPP-B-636. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. National Stock Number (NSN).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:44Z
Check the source to verify that this is the current version before use.

6.2 This specification does not cover all types, classes, grades or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the type normally procured to meet Military requirements.

6.3 This specification is applicable to the following item listed in the Federal Supply Catalog:

National Stock No.	Item Identification
6640-00-685-5168	MAILING CASE SECTION, MICROSCOPE SLIDE, Chipboard, 12s

Custodians:
Army - MD
Navy - MS
Air Force - 03


Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6640-0810

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:44Z
Check the source to verify that this is the current version before use.

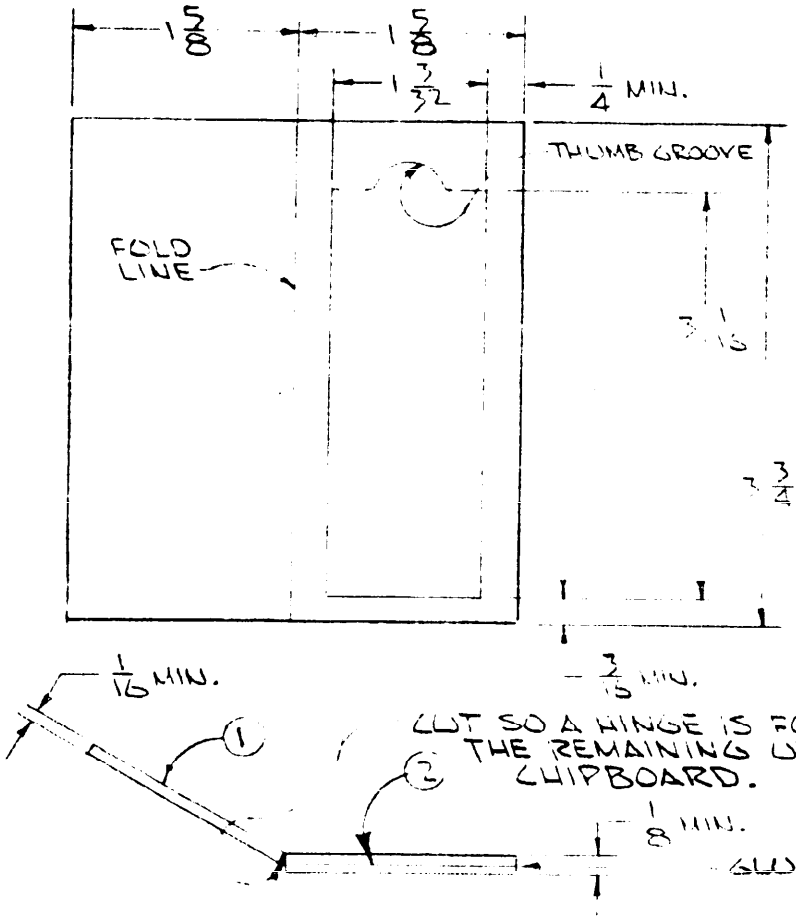

NOTE:
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED ± 1/32 TOLERANCE ON DIMENSIONS

COMPONENT	MATERIAL	THICKNESS (REF.)
(1) FOLDING PORTION	NO.2 EXTRA-HEAVY GRAY WATER FINISHED PAINTED CHIPBOARD.	.090
(2) BACKING PORTION	NO.3 CHIPBOARD	.065

FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
[illegible] R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-M-36997 (DSA-DM)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:44Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Defense Personnel Support Center
ATTN: DPSC-ATT
2800 South 20th Street
Philadelphia, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:44Z
Check the source to verify that this is the current version before use.