

FED. SUP CLASS
6210

Figure 1.-Outline dimensions.

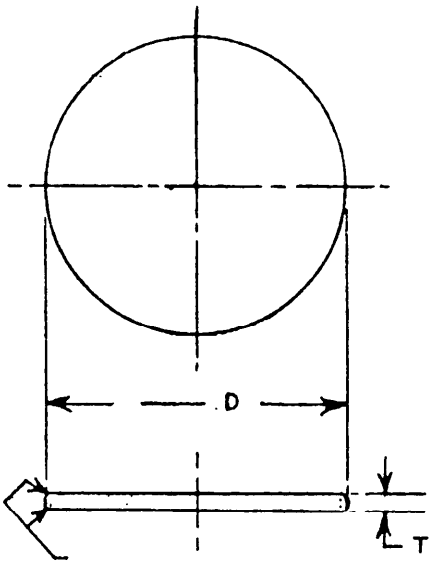

Unless otherwise specified, edges shall have a slight chamfer or radius.

Figure 2.

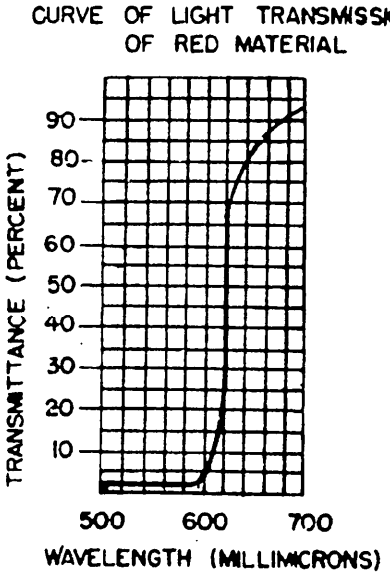

APPROVED 9 MAR 1961 REVISED (A) 12 AUG 1965

(A) Entire standard revised.

P.A. SH Other Cust	TITLE WINDOW, LIGHTING FIXTURE, INCANDESCENT, PLASTIC, DISC SHAPED	MILITARY STANDARD MS17153(SHIPS)
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 3

This standard has been approved by the Bureau of Ships Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.

This standard has been approved by the Bureau of Ships Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. SH Other Cust

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:

TITLE WINDOW, LIGHTING FIXTURE, INCANDESCENT, PLASTIC, DISC SHAPED

MILITARY STANDARD

MS 17153(SHIPS)

SHEET 2

MS PART NUMBER[1]	MATERIAL	DIMENSIONS[2] D (Diameter) Inches	DIMENSIONS[2] T (Thickness) Inches	COLOR Transparent	FINISH	LIGHT TRANSMISSION Percent	WAVE LENGTH Millimicrons	USED WITH
MS17153-1	Plastic, sheet, acrylic, heat resistant, utility grade, in accordance with MIL-P-21105	0.575	0.081	Clear	——	90	——	Drawing 9000-S6202-73907
MS17153-2		0.968	0.062	Red	——	See Figure 2	590 to 700	MS17151
MS17153-3		0.875	0.125	Clear	——	90	——	Drawings 9000-S6202-73919 through 9000-S6202-73922 as applicable.
MS17153-5		0.875	0.125	Clear	Etched on one side	90	——	
MS17153-7		0.875	0.125	Green		50 ± 5	475 to 550	
MS17153-9		0.875	0.125	Blue		50 ± 5	425 to 475	
MS17153-11		0.875	0.125	Amber		90 ± 5	525 to 700	
MS17153-13		0.875	0.125	Yellow		90 ± 5	500 to 600	
MS17153-15		0.875	0.125	Red		See Figure 2	590 to 700	
MS17153-17		2.093	0.125	Red	——	See Figure 2	590 to 700	MS17225
MS17153-18		2.625	0.125	Clear	——	90	——	3/ Drawing 9000-S6405-74443
MS17153-19		4.312	0.250	Clear	——	90	——	3/ Drawing 9-S-5293-L
MS17153-20		4.312	0.250	Red	——	See Figure 2	590 to 700	3/ Drawing 9-S-5293-L
MS17153-21	Plastic heat resistant, commercial plexiglass, pattern P-6, or equivalent. The pattern shall be the reverse of Luminex glass.	13.125	0.125	Clear	See Requirement 2	——	——	Specification MIL-L-2034

1/ MS Part Numbers 17153-4, -6, -8, -10, -12, -14, -16 have been canceled. Items not developed.

2/ Standard commercial plastic tolerances shall apply.

3/ To be used for replacement only. Inactive for new design.

FED. SUP. CLASS 6210

APPROVED 9 MAR 1961 REVISED (A) Entire standard revised.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6210

REQUIREMENTS:

1. Plastic windows shall be free of defects such as imbedded particles, bubbles, scratches, blemishes and striations such as will affect their optical properties and shall provide an even distribution of transmitted light over their entire area.

2. Applicable only to part number MS17153-21:

   (a) Adequate measures shall be taken in molding or processing plastics to insure that stress buildup does not occur or is satisfactorily treated to relieve these stresses to prevent deterioration or failure of the part or assembly.

NOTES:

1. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

2. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 9 MAR 1961 REVISED (A) Entire standard revised.

Project 6210-N254SH

P.A. SH Other Cust	TITLE WINDOW, LIGHTING FIXTURE, INCANDESCENT, PLASTIC, DISC SHAPED	MILITARY STANDARD MS 17153(SHIPS)
Procurement Specification NONE	SUPERSEDES:	SHEET 3

This standard has been approved by the Bureau of Ships Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.