
FED. SUP CLASS
4730

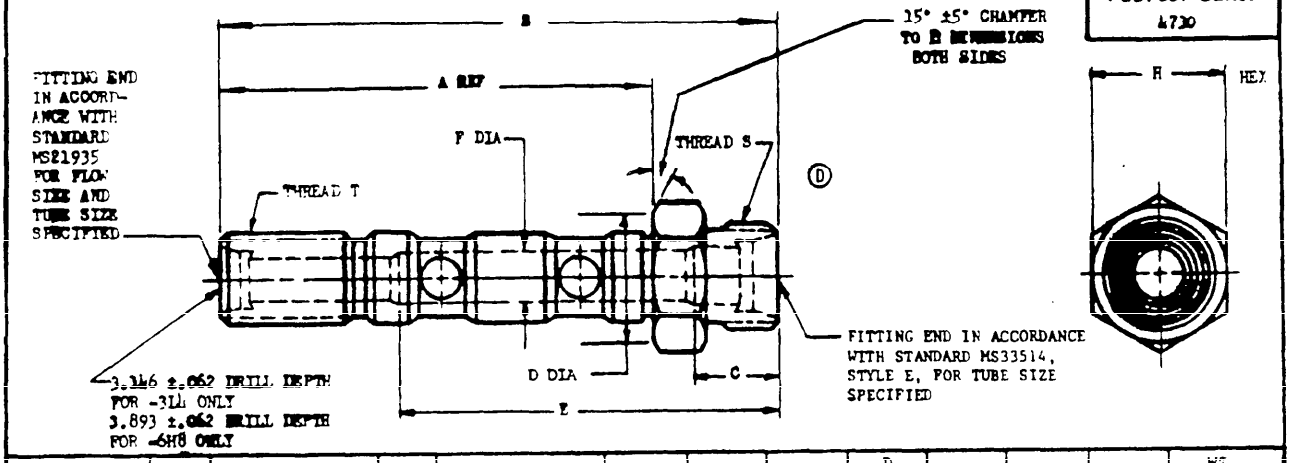

LOW FLOW SIZE DASH NUMBER	TUBE OD	THREAD S MIL-S-8879	TUBE OD	THREAD T MIL-S-8879	A REF	B	C ±.062	D +.000 -.015	E ±.062	F ±.003	H HEX	WT LB MAX
-3L4	3/16	.3750-24 UNJF-3A	1/4	.4375-20 UNJF-3A	3.162	3.896	THRU	.621	—	.187	.621 / .628	—
-4L4	1/4	.4375-20 UNJF-3A		.4375-20 UNJF-3A		3.959	THRU	.684	THRU		.684 / .691	.019
-5L4	5/16	.5000-20 UNJF-3A		.4375-20 UNJF-3A		4.021	—	.746	2.715	.234	.746 / .753	.023
-6L4	3/8	.5625-18 UNJF-3A		.4375-20 UNJF-3A		4.068	.663	.871	2.725		.871 / .878	.050
-8L4	1/2	.7500-16 UNJF-3A		.4375-20 UNJF-3A		4.161	.656	.996	2.780		.996 / 1.003	.052

HIGH FLOW SIZE DASH NUMBER	TUBE OD	THREAD S MIL-S-8879	TUBE OD	THREAD T MIL-S-8879	A REF	B	C ±.062	D +.000 -.015	E ±.062	F ±.003	H HEX	WT LB MAX
-6H4	3/8	.5625-18 UNJF-3A	1/4	.4375-20 UNJF-3A	3.732	4.643	—	.871	3.262	.297	.871 / .878	.052
-6H5		.5625-18 UNJF-3A	5/16	.5000-20 UNJF-3A			—					
-6H6		.5625-18 UNJF-3A	3/8	.5625-18 UNJF-3A			THRU		THRU			
-6H8		.5625-18 UNJF-3A	1/2	.7500-16 UNJF-3A			THRU		—	.422		
-8H4	1/2	.7500-16 UNJF-3A	1/4	.4375-20 UNJF-3A		4.736	—	.996	3.218		.996 / 1.003	.050
-8H5		.7500-16 UNJF-3A	5/16	.5000-20 UNJF-3A			—					—
-8H6		.7500-16 UNJF-3A	3/8	.5625-18 UNJF-3A			—					—
-8H8		.7500-16 UNJF-3A	1/2	.7500-16 UNJF-3A			THRU		THRU			.058
-10H4	5/8	.8750-14 UNJF-3A	1/4	.4375-20 UNJF-3A		4.799	.812	1.121	3.242		1.121 / 1.128	.054
-10H5		.8750-14 UNJF-3A	5/16	.5000-20 UNJF-3A								—
-10H6		.8750-14 UNJF-3A	3/8	.5625-18 UNJF-3A								—
-10H8		.8750-14 UNJF-3A	1/2	.7500-16 UNJF-3A					THRU			—

INACTIVE FOR NEW DESIGN AFTER 31 DEC: 1989 (D)

REQUIREMENTS:

1. MATERIAL: ALUMINUM ALLOY - BARS. SEE PROCUREMENT SPECIFICATION.
2. FINISH: SEE PROCUREMENT SPECIFICATION.
(D) SURFACE FINISH IN ACCORDANCE WITH ANSI B46.1.
UNLESS OTHERWISE NOTED ALL OUTSIDE MACHINED SURFACES SHALL BE 125 MICROINCHES Ra AND ALL INSIDE SURFACES SHALL BE 250 MICROINCHES Ra.

(D) DENOTES CHANGES

APPROVED 15 Feb 56 REVISED (A) 20 Nov 57 (B) 27 June 69 (C) 26 JUNE 1981 (D) 10 JUNE 1988

REVIEW ACTIVITIES: USAF - 11, 82 DLA - CS

USER ACTIVITIES: ARMY - GL, CR, ME, AT AF-11,71 NAVY-YD

AMSC N/A

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

The military standard is approved by the Department of Defense and is mandatory on all activities. Suggestions for all new engineering and design applications and for revisions are should be made here this document.

PA NAVY - AS Other Cost	INTERNATIONAL INTEREST (D)	TITLE	MILITARY STANDARD
USAF - 99 ARMY - AV	~~SEE NOTE~~ -7	BOLT, CLUSTER FITTING, DOUBLE PORT, THROUGH, FLARELESS	MS21941
PROCUREMENT SPECIFICATION MIL-F-16280	SUPERSEDES:		SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:42Z
Check the source to verify that this is the current version before use.

PROJECT NO. 4730-0985

FED. SUP CLASS
4730

NOTES:

1. FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS.

2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS±.010, ANGLES±1/2°.

3. PART NUMBERS:
   NO CODE LETTER IN PART NUMBER FOR ALUMINUM ALLOY (2024).
   ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
   EXAMPLES OF PART NUMBERS:
   MS21941-8H4 - BOLT, 1/2 TUBING TO 1/4 TUBING, HIGH FLOW, ALUMINUM ALLOY (2024).
   MS21941W8H4 - BOLT, 1/2 TUBING TO 1/4 TUBING, HIGH FLOW, ALUMINUM ALLOY (7075).

4. INSTALLATION IN ACCORDANCE WITH MS21931.

5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

6. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

(D)
~~7. CERTAIN PROVISIONS (SCREW THREAD, HEXAGON SIZE, AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.~~

APPROVED 15 Feb 57 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2.

REVIEW ACTIVITIES: USAF - 11, 82
DLA-CS

USER ACTIVITIES: ARMY - GI, CR, MF, AT
USAF-11, 71
NAVY-YD.

AMSC N/A
This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

P.A. NAVY — AS Other Cust: USAF - 99, ARMY - AV	INTERNATIONAL INTEREST (D): ~~SEE NOTE 7~~	TITLE: BOLT, CLUSTER FITTING, DOUBLE PORT, THROUGH, FLARELESS	MILITARY STANDARD MS21941
PROCUREMENT SPECIFICATION: MIL-F-18280		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAR 71 672-1 (Continued) PLATE NO. 20000

Source: https://assist.dla.mil -- Downloaded: 20260 23T14:42Z
Check the source to verify that this is the current version before use.