INCH-POUND


MIL-DTL-55302/32G
w/AMENDMENT 1
10 September 2018
SUPERSEDING
MIL-DTL-55302/32G
24 March 2004


DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: CONTACTS, SOLDER EYELET AND WRAPPOST REMOVABLE TYPES

This specification is approved for used by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

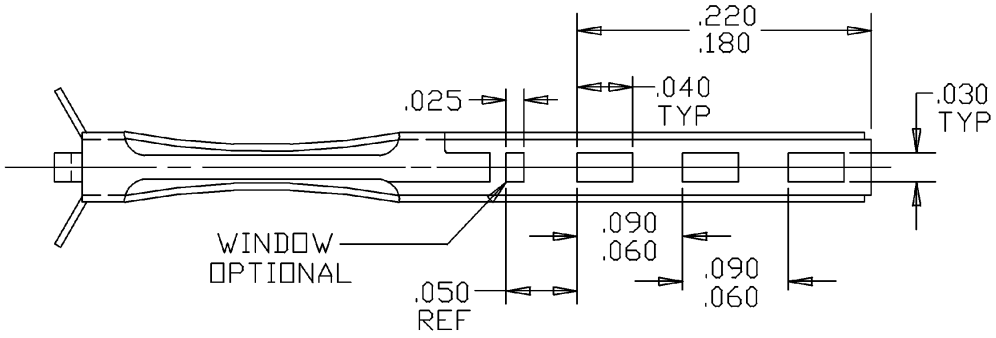

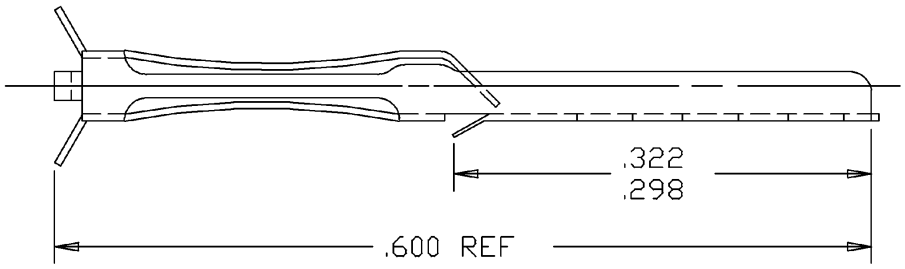

Inches	mm
.030	0.76
.040	1.02
.060	1.52
.090	2.29
.180	4.57
.220	5.59
.298	7.57
.322	8.18
.600	15.24


SOLDER EYELET-01

FIGURE 1. Contacts, removable type.


AMSC N/A

FSC 5999


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

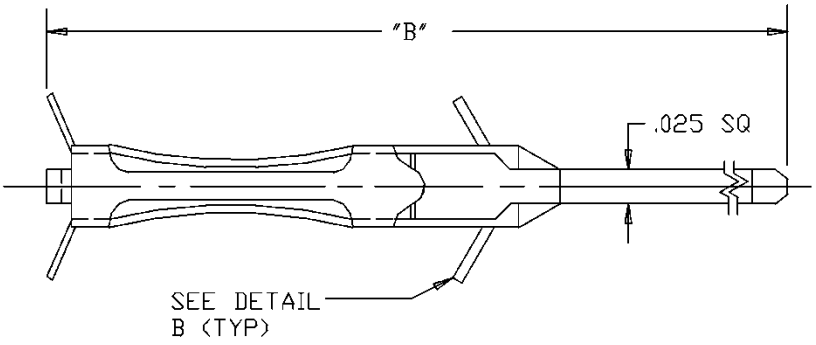

WRAPPOST TYPE VI

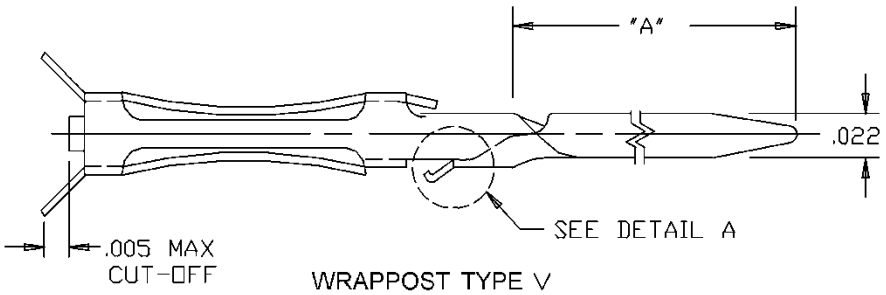

WRAPPOST TYPE V

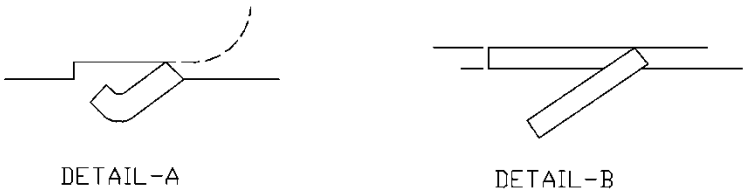

Detail A Part or Identifying Numbers (PINs).

Wrappost contacts, type V		
PIN	A	B max
M55302/32-02	.425	.795
M55302/32-03	.585	.955
M55302/32-04	.745	1.115

Detail B PINs.

Wrappost contacts, type VI		
PIN	A	B max
M55302/32-05	.425	.795
M55302/32-06	.585	.955
M55302/32-07	.745	1.115

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. Maximum wire size: No. 26 AWG
5. Use contact extraction tool M81969/9-01 for type V contacts.
6. Use contact extraction tool 1-265871-7 (or equivalent) for type VI contacts.

FIGURE 1. Contacts, removable type - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Material: Contact material shall be in accordance with MIL-DTL-55302 or beryllium copper alloy C17410 in accordance with ASTM B768.

Plating (contact):

Engagement area: Gold over .100 inch (2.54 mm) length over nickel in accordance with MIL-DTL-55302.

Termination area: Tin lead for .220 inch (5.59 mm) length over nickel in accordance with MIL-DTL-55302.

Other areas: Nickel-plated in accordance with MIL-DTL-55302.

PINs M55302/32-02 through M55302/32-07: Entire part shall be plated with gold over nickel in accordance with MIL-DTL-55302.

Qualification and quality conformance: Qualification and quality conformance requirements are not applicable. All contacts are tested in accordance with the applicable specification sheet.

Supersession data: See table I.

TABLE I. Supersession data.

Superseding PIN M55302/32-	Superseded manufacturer's (CAGE 00779) PIN
01	583218-3
02	2-583812-6
03	2-583812-8
04	3-583812-0
05	1-446629-4
06	1-446629-6
07	1-446629-8

Application: Contacts, solder eyelet, are to be used with connectors in accordance with MIL-DTL-55302/24, MIL-DTL-55302/25, and MIL-DTL-55302/27, (type II). Contacts, wrappost, are to be used with connectors in accordance with MIL-DTL-55302/27 (types V and VI) and MIL-DTL-55302/130 (type 2).

Amendment notations. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/24
MIL-DTL-55302/25
MIL-DTL-55302/27
MIL-DTL-55302/130
ASTM B768

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5999-2018-013)

Review activities:
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.