METRIC


MIL-P-63464/6B
17 January 1992
SUPERSEDING
DOD-P-63464/6A
21 April 1982

MILITARY SPECIFICATION SHEET

PIN, GROOVED, HEADLESS-LONGITUDINAL CENTER GROOVE, CORROSION-RESISTANT STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specifications listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: DOD-P-63464.

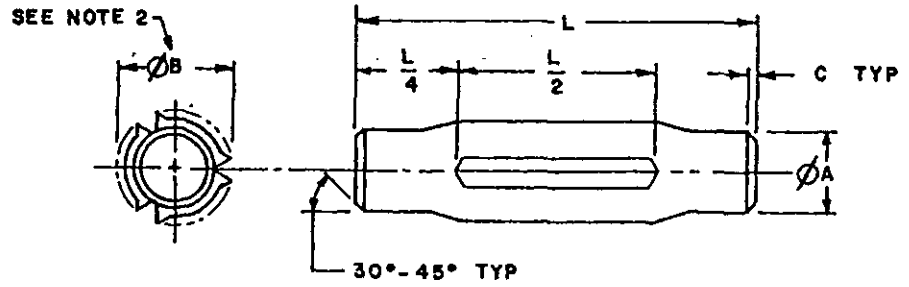

NOTES:

1. All dimensions are in millimeters.
2. Diameter "B" is the expanded diameter as measured with a "GO" and "NOT GO" ring gage.

FIGURE 1. PIN, GROOVED, HEADLESS-LONGITUDINAL CENTER GROOVE

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 202610-23T02:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: CRES, 300 series.

2. Surface treatment: Cleaning and descaling.

3. Part number: Consists of the letter "D", the basic number of this specification sheet and a dash number taken from Table I.

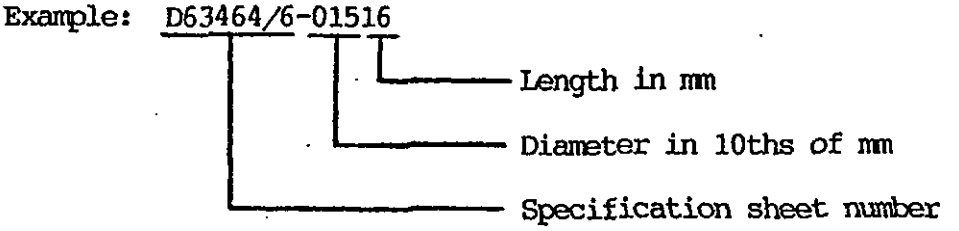

4. Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:56Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND CHARACTERISTICS

NOM SIZE		1.5	2	2.5	3	4	5	6
ØA	max	1.50	2.00	2.50	3.00	4.00	5.00	6.00
	min	1.47	1.97	2.47	2.97	3.95	4.95	5.95
Recm hole size	max	1.54	2.05	2.55	3.05	4.06	5.07	6.08
	min	1.50	2.00	2.50	3.00	4.00	5.00	6.00
C Chamfer length	max	0.4					0.8	

L ±0.25 Length	Dash No	ØB +0.05 -0.00	Dash No	ØB +0.05 -0.00	Dash No	ØB ±0.05	Dash No	ØB ±0.05	Dash No	ØB ±0.05	Dash No	ØB ±0.05	Dash No	ØB ±0.05
6.00	01506	1.58	02006	2.10										
8.00	01508	1.58	02008	2.10										
10.00	01510	1.58	02010	2.10	02510	2.65	03010	3.20	04010	4.20				
12.00	01512	1.58	02012	2.10	02512	2.65	03012	3.20	04012	4.20	05012	5.25		
16.00	01516	1.58	02016	2.10	02516	2.65	03016	3.20	04016	4.20	05016	5.25	06016	6.20
20.00	01520	1.58	02020	2.05	02520	2.60	03020	3.15	04020	4.20	05020	5.25	06020	6.20
26.00					02526	2.60	03026	3.15	04026	4.15	05026	5.20	06026	6.20
30.00							03030	3.15	04030	4.15	05030	5.20	06030	6.20
40.00									04040	4.15	05040	5.20	06040	6.15
50.00											05050	5.20	06050	6.15
60.00													06060	6.15
70.00														

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AT, EA
Air Force - 82
DLA - IS
NSA - NS

User activities:
Army - ME, MI
Navy - MC

Preparing activity:
Army - AR

Agent: DLA - IS

(Project 5315-0468)

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:56Z
Check the source to verify that this is the current version before use.