INCH-POUND
MIL-S-24235/7B(SH)
28 December 1992
SUPERSEDING
MIL-S-24235/7A(SH)
21 August 1989

MILITARY SPECIFICATION SHEET

# STUFFING TUBES, METAL, AND PACKING ASSEMBLIES FOR ELECTRIC CABLES, FOR CAST ENCLOSURES, PRESSUREPROOF

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-24235.

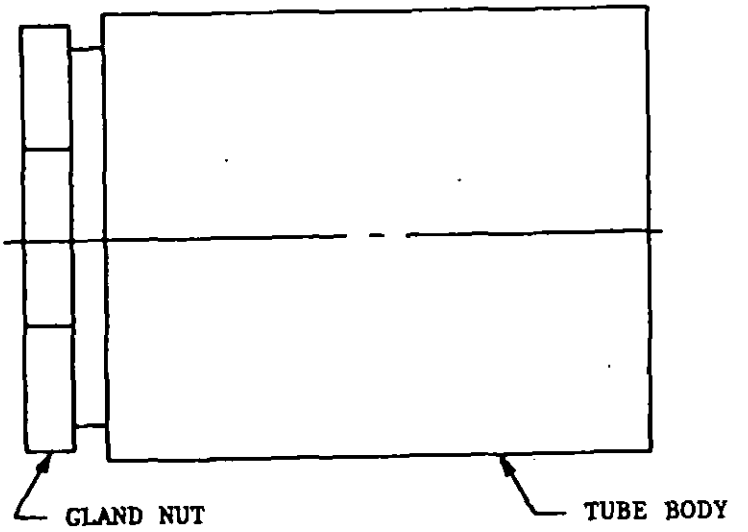



FIGURE 1. Stuffing tube assembly. 01

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances shall be as follows:
   Decimals - plus or minus 0.005 inch.
   Fractions - plus or minus 1/64 inch.
   Angular dimensions - plus or minus 30 minutes.
   Molded parts shall conform to MIL-HDBK-149.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-19T20:23Z
Check the source to verify that this is the currentversion before use.

TABLE I. Part or identifying numbers.

| | | Part or identifying numbers of components | | |
|---|---|---|---|---|
| Assembly part or identifying number | Tube size | Tube body 1 required | Gland nut 1 required | O-ring gasket 1 required |
| M24235/7-001 | A | M24235/7-011 | M24235/7-021 | MS28775-113 |
| M24235/7-002 | B | M24235/7-012 | M24235/7-022 | MS28775-116 |
| M24235/7-003 | C | M24235/7-013 | M24235/7-023 | MS28775-214 |
| M24235/7-004 | D | M24235/7-014 | M24235/7-024 | MS28775-214 |
| M24235/7-005 | E | M24235/7-015 | M24235/7-025 | MS28775-218 |
| M24235/7-006 | F | M24235/7-016 | M24235/7-026 | MS28775-223 |

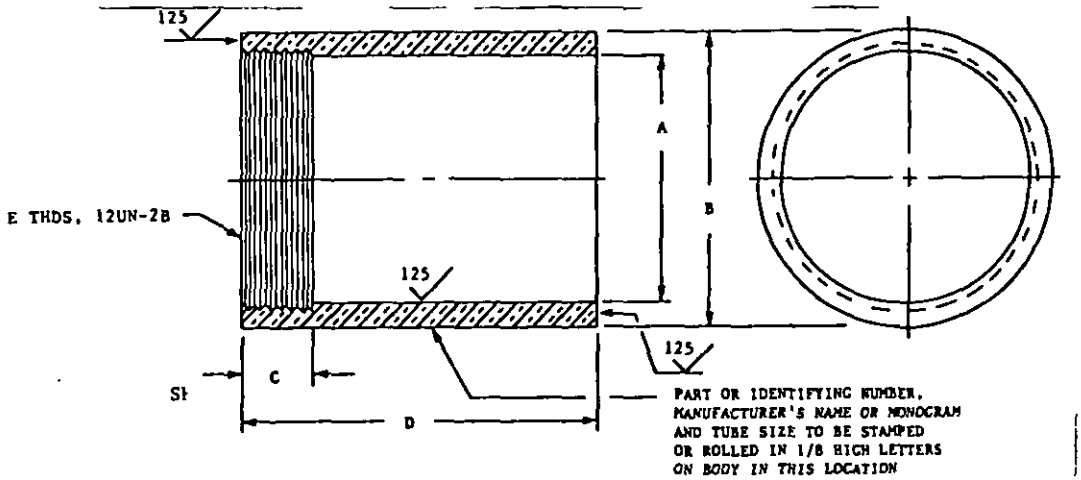



FIGURE 2. Tube body configuration. (02)

TABLE II. Tube body dimensions.

| Part or identifying number | E THDS | A DIA | B DIA | C 1/ | D |
|---|---|---|---|---|---|
| M24235/7-011 | 0.938 | 0.850 | 1.050 | 7/16 | 2-11/16 |
| M24235/7-012 | 1.188 | 1.062 | 1.315 | 7/16 | 2-1/4 |
| M24235/7-013 | 1.500 | 1.368 | 1.660 | 9/16 | 2-11/16 |
| M24235/7-014 | 1.500 | 1.368 | 1.660 | 9/16 | 3-9/32 |
| M24235/7-015 | 1.750 | 1.600 | 1.900 | 9/16 | 2-7/8 |
| M24235/7-016 | 2.125 | 2.032 | 2.375 | 9/16 | 2-7/8 |

1/ Tolerance shall be minus 0, plus 4 threads.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:23Z
Check the source to verify that this is the current version before use.

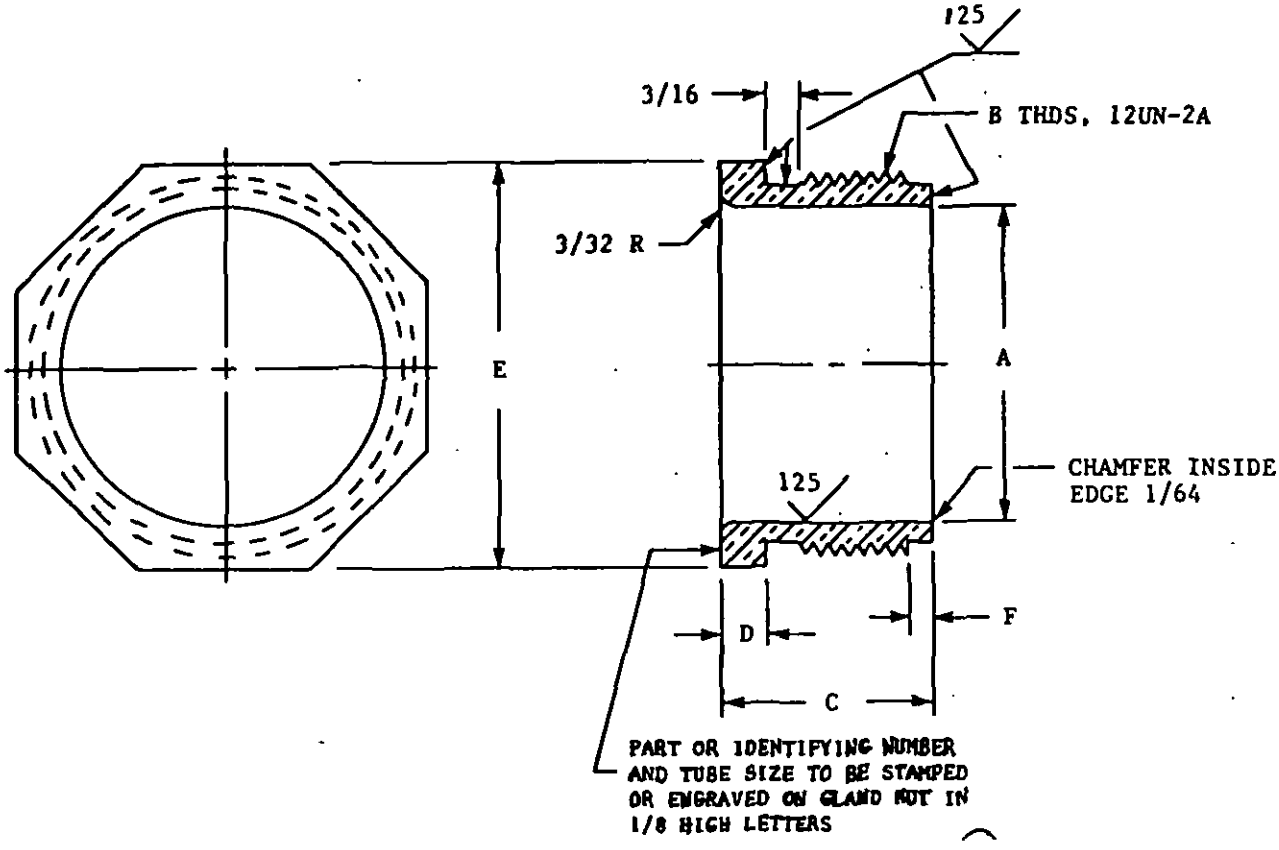



FIGURE 3. Gland nut configuration. (03)

TABLE III. Gland nut dimensions.

| Tube size | Part or identifying number | A DIA | B THDS | C | D | E | F |
|---|---|---|---|---|---|---|---|
| A | M24235/7-021 | 0.797 | 0.938 | 5/8 | 1/8 | 1-1/32 | 1/16 |
| B | M24235/7-022 | .864 | 1.188 | 5/8 | 1/8 | 1-1/4 | 1/16 |
| C | M24235/7-023 | 1.145 | 1.500 | 25/32 | 3/16 | 1-5/8 | 3/32 |
| D | M24235/7-024 | 1.145 | 1.500 | 25/32 | 3/16 | 1-5/8 | 3/32 |
| E | M24235/7-025 | 1.457 | 1.750 | 31/32 | 3/16 | 1-7/8 | 7/32 |
| F | M24235/7-026 | 1.792 | 2.125 | 1-3/16 | 1/4 | 2-1/4 | 1/8 |

REQUIREMENTS:

1. Cable packing and end sealing shall be in accordance with DOD-STD-2003, section 3.
2. O-ring gasket shall be furnished with the stuffing tube.
3. Intended use: The stuffing tubes are for electric cable penetrations pressureproof cast enclosures for inboard submarine applications. Sealing plugs for use with these tubes are shown in DOD-STD-2003, section 3.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:23Z
Check the source to verify that this is the current version before use.

TABLE IV. Parts list.

| Item no. | Description 1/ | Qty 2/ | Material and specification | Remarks |
|---|---|---|---|---|
| 01 | Stuffing tube assemblies | - | -- | See figure 1 and table I |
| 02 | Tube body | 1 | Brass, coml 3/ | See figure 2 and table II |
| 03 | Gland nut | 1 | Brass, coml 3/ | See figure 3 and table III |
| 04 | O-ring | 1 | Nitrile rubber, MS28775 | See table I |

1/ See applicable figure and table listed in "Remarks" column for part numbers and dimensions.
2/ Quantity is for one complete assembly of each size.
3/ May be of another material when specified in the contract or order (see MIL-S-24235).

The previous issue of this specification sheet replaced that part of Drawing, NAVSHIPS No. 9000-S6202-73902 covering stuffing tubes for cast enclosures.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5975-N078-07)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:23Z
Check the source to verify that this is the current version before use.