
FED. SUP CLASS
4730

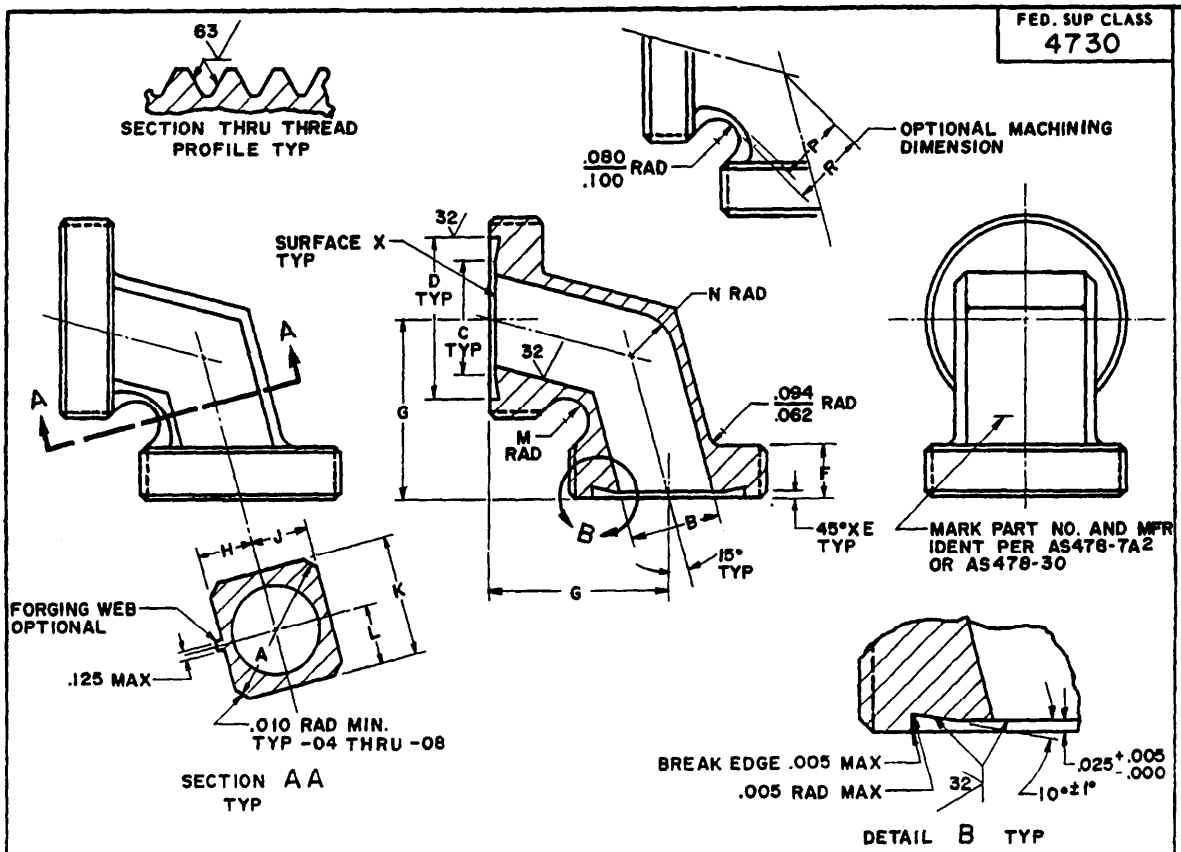

MS PART NO.	TUBE O.D.	THREAD T UNJEF-3A	A DIA	B DIA ±.003	C DIA +.000 -.010	D DIA +.002 -.000	E	F +.031 -.000	G +.010 -.000	H +.015 -.000	J +.015 -.000	K +.002 -.006	L	M RAD	N RAD MAX	P	R +.000 -.015	APPROX WEIGHT LB/EA
MS27862-04	1/4	11/16-24	—	.200	.282	.470	.030	.208	.665	.134	.164	.437	.218	.170	.100	.205	.250	
MS27862-06	3/8	13/16-20	—	.312	.420	.608	.035	.250	.786	.198	.208	.562	.281	.200	.156	.290	.315	
MS27862-08	1/2	15/16-20	—	.420	.536	.724	.035	.250	.849	.263	.263	.687	.344	.200	.210	.365	.390	
MS27862-12	3/4	1-3/16-18	1.110	.666	.808	.986	.040	.278	1.013	.386	.386	.875	.437	.226	.333	.505	.535	
MS27862-16	1	1-1/2-18	1.375	.884	1.090	1.282	.040	.278	1.169	.516	.515	1.125	.562	.219	.442	.590	.650	

1. THREAD PD SHALL BE SQUARE TO SURFACE X WITHIN .005 FIR AND CONCENTRIC WITH DIA D WITHIN .005 FIR.
2. MATERIAL: ALUMINUM ALLOY, AMS 4127.
3. CLEANING: FINISHED PARTS SHALL BE CLEANED PER MIL-F-27417.
4. SURFACE TEXTURE: IN ACCORDANCE WITH USAS B46.1, UNLESS OTHERWISE SPECIFIED ALL MACHINED SURFACES TO BE 125 MICROINCHES.
5. BREAK EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±5°.
7. DO NOT USE UNASSIGNED PART NUMBERS.
8. REFER TO MS27856 FOR ASSEMBLY.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 14 JULY 1967 REVISED

Review activities: 11, 14, 19, 69, 85, 8 NAS

This standard has been approved by the Department of the AIR FORCE and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF 12 Other Cust	TITLE ELBOW, 90°, ALUMINUM, FLUID CONNECTION FITTING, LOW PRESSURE	MILITARY STANDARD MS27862 (USAF)
PROCUREMENT SPECIFICATION MIL-F-27417	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:53Z
Check the source to verify that this is the current version before use.