NOTE.—This drawing was approved by joint action of the Air Force and Navy Department as the Air Force-Navy standard for this product. This drawing supersedes all cancelled standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval shown.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NAVAER 1086C

PROCUREMENT SPECIFICATION
V-F-106
EXCEPT AS NOTED

AIR FORCE-NAVY AERONAUTICAL STANDARD

FASTENERS - INTERLOCKING SLIDE

AN229

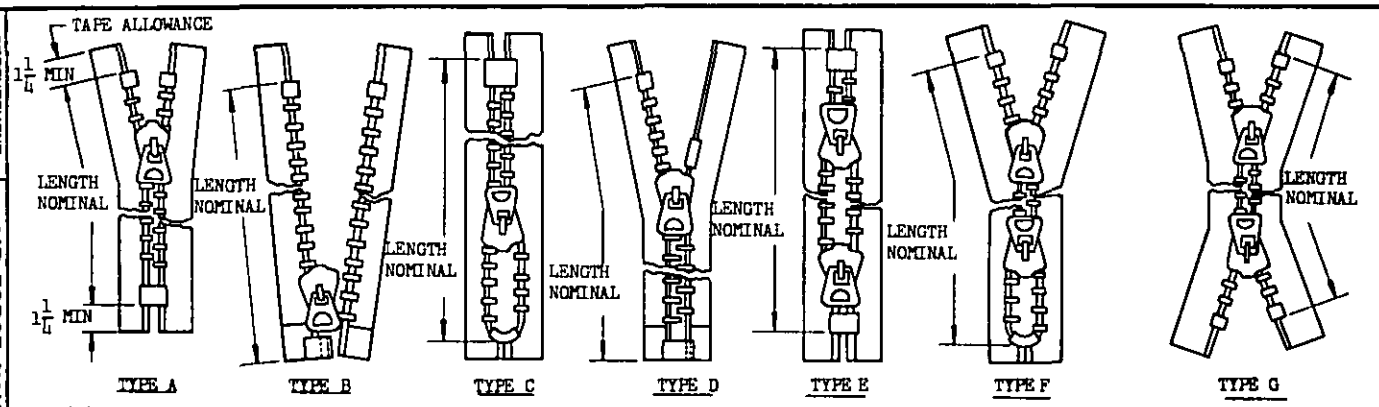

(a) ~~SIZE 00 - EXTRA LIGHT SERVICE~~
SIZE 0 = LIGHT SERVICE
SIZE 1 = LIGHT-MEDIUM SERVICE
SIZE 2 = MEDIUM SERVICE
SIZE 3 = MEDIUM HEAVY SERVICE
SIZE 4 = HEAVY SERVICE

TYPE A = NON-SEPARATING, SINGLE ACTION.
TYPE B = SEPARATING, SINGLE ACTION.
TYPE C = NON-SEPARATING, SINGLE ACTION WITH BRIDGE STOP.
TYPE D = SEPARATING, SINGLE ACTION, QUICK DETACHING.
TYPE E = NON-SEPARATING, DOUBLE ACTION, CENTER OPENING.
TYPE F = NON-SEPARATING, DOUBLE ACTION WITH BRIDGE STOP.
TYPE G = SEPARATING, DOUBLE ACTION, END OPENING.

STYLE S = STANDARD NON-LOCKING.
STYLE L = LOCKING.

GRADE I = BRASS.

5 ~~GRADE II - ZINC ALLOY.~~ INACTIVE FOR DESIGN AFTER 15 AUGUST 1968. USE GRADE I.

(a) INACTIVE FOR DESIGN AFTER 16 DEC 1949. USE SIZE 0.

UNLESS OTHERWISE SPECIFIED, ALL FASTENERS TO BE CLASS A, SHORT TAB PULL WITH HOLE AS SHOWN. TAPE COLOR SHADE NO. 613 OF ANA BULLETIN NO. 157; NATURAL FINISH ON CHAIN. RIGHT HAND SLIDE ASSEMBLY IS STANDARD FOR QUICK DETACHING FASTENERS: SPECIFY LEFT SLIDE ASSEMBLY WHEN REQUIRED.

1st DASH NO. SHALL INCLUDE SIZE, TYPE, AND LENGTH EXPRESSED IN 1/4 INCH INCREMENTS. ~~2ND DASH NO. SHALL INDICATE GRADE.~~

5 EXAMPLES OF PART NOS.: AN229-2AL25- I = MEDIUM SERVICE, NON-SEPARATING, SINGLE ACTION, LOCKING, 6-1/4 LONG, GRADE I.
~~AN229-1B635-II = LIGHT-MEDIUM SERVICE, SEPARATING, SINGLE ACTION, NON-LOCKING, 8-3/4 LONG, GRADE II.~~

DIMENSIONS IN INCHES.

REACTIVATED 10 JULY 1952. FOR INDUSTRY USE ONLY.



5 INTERCHANGEABILITY RELATIONSHIP: AN 229 GRADE I IS UNIVERSALLY SUBSTITUTABLE WHEREVER GRADE II IS SPECIFIED.

AN229 GRADE II CANCELLED AFTER 1 AUGUST 1968.

APPROVED 13 Sep 43 REVISED (1) 23 Dec 43 (2) 16 Dec 49 (3) 1 Oct 51 (4) 10 Jul 52 (5) 15 AUG 68

U. S. GOVERNMENT PRINTING OFFICE: 1968-341-510/A-1037

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.