
FED. SUP. CLASS 5310

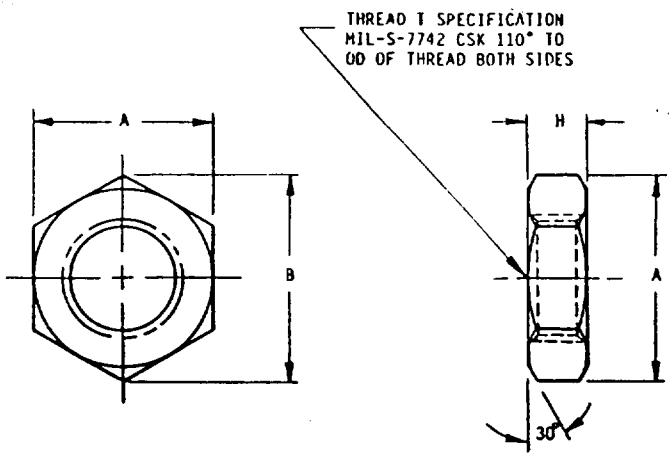

AN PART NO.	THREAD T	ULTIMATE TENSILE STRENGTH MINIMUM POUNDS	A	B APPROX	H
AN316-4	1/4-28UNF-3B	2,040	.438 $^{+.002}_{-.010}$	1/2	1/8
AN316-5	5/16-24UNF-3B	3,250	.500 $^{+.002}_{-.010}$	37/64	5/32
AN316-6	3/8-24UNF-3B	5,050	.563 $^{+.002}_{-.010}$	21/32	3/16
AN316-7	7/16-20UNF-3B	6,800	.625 $^{+.002}_{-.011}$	23/32	7/32
AN316-8	1/2-20UNF-3B	9,250	.750 $^{+.002}_{-.012}$	7/8	1/4
AN316-9	9/16-18UNF-3B	11,800	.875 $^{+.002}_{-.012}$	1- 1/64	9/32
AN316-10	5/8-18UNF-3B	15,050	1.000 $^{+.002}_{-.014}$	1- 5/32	5/16
AN316-12	3/4-16UNF-3B	22,000	1.125 $^{+.002}_{-.016}$	1-19/64	3/8
AN316-14	7/8-14UNF-3B	30,000	1.313 $^{+.002}_{-.017}$	1-33/64	7/16
~~(a) AN316-16~~	~~1-14 NF-3~~	~~40,350~~	~~1.500 $^{+.002}_{-.019}$~~	~~1-47/64~~	~~1/2~~
AN316-18 (a)	1-12UNF-3B	40,350	1.500 $^{+.002}_{-.019}$	1-47/64	1/2

(a) PART NO. AN316-16 INACTIVE FOR DESIGN AFTER 30 OCT 64. USE AN316-18 FOR NEW DESIGN. FOR SIZES SMALLER THAN 1/4, USE NUT AN315.

NOTES:

(11)1. MATERIAL: STEEL, 300 SERIES CORROSION-RESISTANT STEEL. SEE PROCUREMENT SPECIFICATION. (400 SERIES CRES INACTIVE FOR DESIGN AFTER 1 JAN 1992).

2. FINISH: STEEL-CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. PARTS WITH CLASS 3 PLATING MAY BE FURNISHED FROM SUPPLIER'S STOCK UNTIL 1 JANUARY 1975. CORROSION RESISTANT STEEL-PASSIVATE IN ACCORDANCE WITH QQ-P-35.

3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS; ± 1/64, ANGLES; ± 1°.

4. REMOVE ALL BURRS.

5. EXAMPLES OF PART NUMBERS: AN316-7R = NUT, STEEL, 7/16-20UNF-3, RIGHT HAND THREAD.
AN316-7L = NUT, STEEL, 7/16-20UNF-3, LEFT HAND THREAD.
AN316C7L = NUT, CORROSION-RESISTANT STEEL, 7/16-20UNF-3, LEFT HAND THREAD.

6. ADD "C" IN PLACE OF DASH NUMBER FOR CORROSION-RESISTANT STEEL NUTS.
ADD "R" AFTER DASH NUMBER FOR RIGHT HAND THREAD.
ADD "L" AFTER DASH NUMBER FOR LEFT HAND THREAD.

(11)7. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

(11)8. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THIS ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 7 JUL 43 REVISED (10) 29 DEC 72 (11) 25 FEB 91

REVIEWER SYMBOLS:
ARMY - AR
AIR FORCE - 82
DLA - IS

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

AMSC N/A

P.A. NAVY — AS CUSTODIANS: ARMY - AV NAVY - AS AIR FORCE - 99	AIR FORCE–NAVY AERONAUTICAL STANDARD NUT, JAM, HEXAGON	AN316
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES FORMER USAF AND NAVY STANDARD ISSUE OF AN316	SHEET 1 OF 1

Source: http://assist.daps.dla.mil/quicksearch/ - Downloaded: 2026-10-26T14:
Check the source to verify that this is the current version before use.