

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

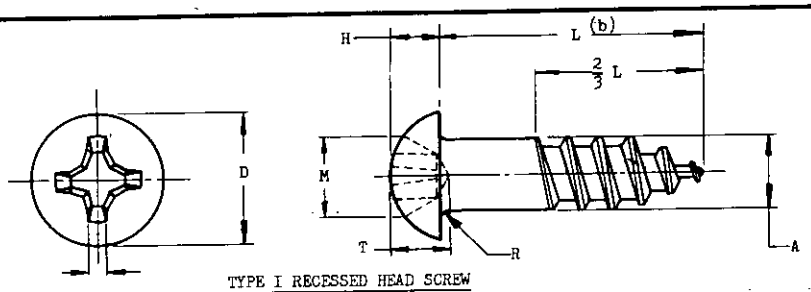


TYPE I RECESSED HEAD SCREW

SIZE	A +.004 -.007 DIA	D DIA MAX	D DIA MIN	H MAX	H MIN	L LENGTH TOLERANCE PLUS	L LENGTH TOLERANCE MINUS	M DIA MAX	M DIA MIN	N WIDTH MIN	R RAD MAX	T DEPTH MAX	RECESS SIZE	NUMBER (a) OF THREADS PER INCH
NO. 2	.086	.162	.146	.069	.059	.000	.080	.111	.101	.018	.016	.089	1	26
NO. 3	.099	.187	.169	.078	.067		.080	.119	.109	.019		.097		24
NO. 4	.112	.211	.193	.086	.075		.090	.127	.117	.018		.105		22
NO. 5	.125	.236	.217	.095	.083		.100	.151	.141	.027		.104	2	20
NO. 6	.138	.260	.240	.103	.091		.100	.159	.149	.027		.112		18
NO. 8	.164	.309	.287	.120	.107		.120	.175	.165	.030		.128		15
NO. 10	.190	.359	.334	.137	.123		.130	.192	.182	.031	.031	.145	3	13
NO. 12	.216	.408	.382	.153	.139		.150	.246	.236	.036		.165		11
NO. 14	.242	.457	.429	.170	.155		.160	.262	.252	.037		.182		10
NO. 16	.268	.506	.476	.187	.171		.180	.278	.268	.039		.198		9

(a) MAXIMUM PERMISSIBLE VARIATION IN NUMBER OF THREADS PER INCH IS PLUS OR MINUS 10 PERCENT.

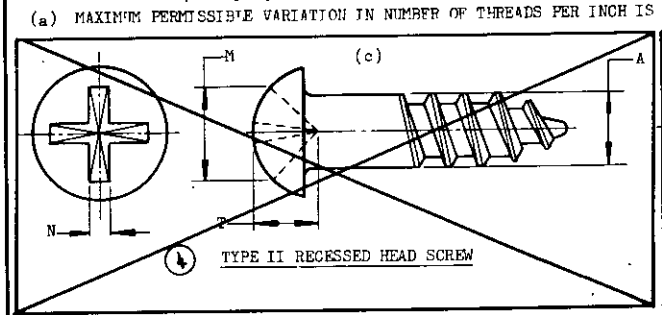

4 TYPE II RECESSED HEAD SCREW

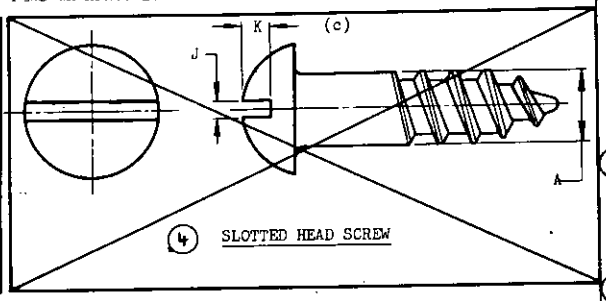

4 SLOTTED HEAD SCREW

RECESS DIMENSIONS

SCREW SIZE	A +.004 -.007 DIA	M DIA MAX	M DIA MIN	N WIDTH MIN	T DEPTH MAX
NO. 2	.086	.122	.109	.018	.079
NO. 3	.099	.140	.127	.021	.091
NO. 4	.112	.159	.145	.024	.103
NO. 5	.125	.177	.163	.027	.115
NO. 6	.138	.195	.180	.031	.127
NO. 8	.164	.232	.215	.037	.151
NO. 10	.190	.270	.250	.044	.176
NO. 12	.216	.306	.286	.051	.200
NO. 14	.242	.343	.322	.057	.224
NO. 16	.268	.380	.357	.064	.248

SCREW SIZE	A +.004 -.007 DIA	(c) J MAX	(c) J MIN	(c) K MAX	(c) K MIN
NO. 2	.086	.031	.023	.048	.037
NO. 3	.099	.035	.027	.053	.040
NO. 4	.112	.039	.031	.058	.044
NO. 5	.125	.043	.036	.063	.047
NO. 6	.138	.048	.039	.068	.051
NO. 8	.164	.054	.045	.077	.058
NO. 10	.190	.060	.050	.087	.065
NO. 12	.216	.067	.056	.096	.073
NO. 14	.242	.075	.061	.106	.080
NO. 16	.268	.075	.064	.115	.087

4 FOR GAGING OF THESE TYPES OF RECESS, SEE THE 1950 SUPPLEMENT TO HANDBOOK H28 SCREW THREADS FOR FEDERAL SERVICES 1944.

(b) SEE TABLE FOR LENGTH TOLERANCES.

5 CANCELLED AFTER 19 SEPT 1981 SUPERSEDED BY MS 35493 & MS 35495

MATERIAL: BRASS AND STEEL

FINISH: STEEL, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE I, CLASS 3 OR ZINC PLATE, SPECIFICATION QQ-Z-325. BRASS, NONE.

ADD R BETWEEN FIRST AND SECOND DASH NUMBERS FOR RECESSED HEAD SCREWS.

EXAMPLES OF PART NUMBERS: AN545-10-10 = NO. 10 SLOTTED HEAD STEEL SCREW, 1-1/4 INCHES LONG.
AN545B10-10 = NO. 10 SLOTTED HEAD BRASS SCREW, 1-1/4 INCHES LONG.
AN545-10R10 = NO. 10 RECESSED HEAD STEEL SCREW, 1-1/4 INCHES LONG.
AN545B10R10 = NO. 10 RECESSED HEAD BRASS SCREW, 1-1/4 INCHES LONG.

SCREWS SHALL BE FREE OF ALL LOOSE OR HANGING BURRS OR SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES.

IN CASE OF CONFLICT, THE REQUIREMENTS SPECIFIED HEREON SHALL TAKE PRECEDENCE OVER THE REQUIREMENTS SPECIFIED IN SPECIFICATION FF-S-111.

4 (c) TYPE II RECESSED AND SLOTTED HEAD SCREWS INACTIVE FOR DESIGN AFTER 17 FEBRUARY 1959. 5 DENOTES CHANGES

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

APPROVED 17 May 43 REVISED (1) 28 Sep 48 (2) 25 May 50 (3) 4 May 53 (4) 17 Feb 59 (5) 19 SEP 1981

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN545
FF-S-111	SCREW, WOOD, ROUND HEAD	SHEET 1 OF 2

SUPERSEDES FORMER USAF AND NAVY STANDARD ISSUES OF AN545 AND USAF DRAWINGS 42B4940, 42B5705

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/7488

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.