FED SUP CLASS
5306

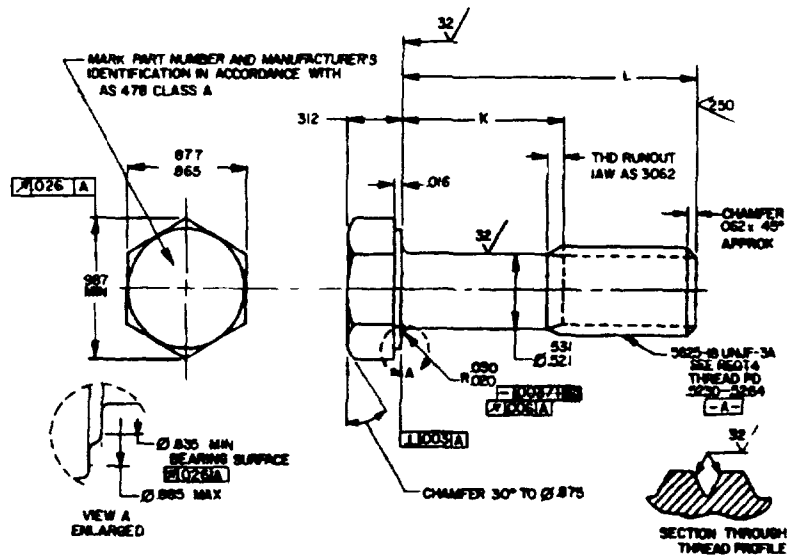


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-04	.875	.113- .133	11.18
-05	.938	.113- .133	11.56
-06	1.000	113- 133	11 94
-07	1 062	.113- 133	12 32
-08	1.125	.113- 133	12 70
-09	1.188	113- .133	13.08
-10	1.250	.113- 133	13 47
-11	1.312	113- .133	13.85
-12	1.375	.113- .133	14.23
-13	1.438	.113- .133	14.62
-14	1.500	113- .133	15 00
-15	1.562	.128- .188	15.38
-16	1 625	190- .250	15.77
-17	1 688	.253- 313	16.15
-18	1.750	315- .375	16 53
-19	1.812	.377- .437	16.91
-20	1.875	440- 500	17.30
-21	2 000	565- 625	18 06
-22	2 125	690- .750	18.83
-23	2.250	.815- .875	19.60
-24	2 375	.940-1.000	20.36
-25	2.500	1.065-1.125	21.13
-26	2.625	1.190-1.250	21.90
-27	2.750	1 315-1.375	22 66
-28	2.875	1 440-1.500	23.43
-29	3.000	1 565-1 625	24.19
-30	3.125	1 690-1.750	24.96

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-31	3.250	1.815-1.875	25.73
-32	3.375	1.940-2.000	26.49
-33	3.500	2.065-2 125	27 26
-34	3.625	2.190-2.250	28.02
-35	3.750	2.315-2.375	28.79
-36	3.875	2.440-2.500	29.56
-37	4 000	2.565-2.625	30.32
-38	4.125	2.690-2 750	31.09
-39	4.250	2.815-2.875	31.86
-40	4.375	2.940-3.000	32.62
-41	4.500	3.065-3.125	33.39
-42	4.625	3.190-3.250	34.15
-43	4.750	3.315-3.375	34.92
-44	4.875	3.440-3.500	35.69
-45	5.000	3.565-3.625	36.45
-46	5.125	3.690-3.750	37.22
-47	5.250	3.815-3.875	37.99
-48	5.375	3.940-4.000	38.75
-49	5 500	4.065-4.125	39.52
-50	5.625	4.190-4.250	40.28
-51	5.750	4.315-4.375	41.05
-52	5.875	4.440-4.500	41.82
-53	6 000	4.565-4.625	42.58

© ENTIRE STANDARD REVISED

P.A. NAVY-AS (Other Cust: ARMY-AV, AIR FORCE-99)	INTERNATIONAL INTEREST	TITLE: BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .5625-18 UNJF-3A	MILITARY STANDARD MS9524
PROCUREMENT SPECIFICATION: AMS 7452	SUPERSEDES:		PAGE 1 OF 2

DD FORM (MAY 1) 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0988

APPROVED 2 FEB 68 REVISED © 22 MAY 86

USER ACTIVITIES

REVIEWER ACTIVITIES:
AIR FORCE - 82
DLA-1S

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairing one shall be made from this document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

REQUIREMENTS:

1 MATERIAL: IN ACCORDANCE WITH AMS 6322-80

2 PROTECTIVE COATING AND SURFACE TREATMENT CADMIUM PLATE IN ACCORDANCE WITH AMS 2400-80. DIMENSIONS SPECIFIED ARE AFTER PLATING.

3 HARDNESS: 26-32 HRC.

4 THREADS. THREADS IN ACCORDANCE WITH MIL-S-8879.

5 SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46 1 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON.

6 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.

7 HEAD TO SHANK FILLET: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT DASH NUMBER SIZES -16 AND SMALLER.

8 TOLERANCE. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°

9 MAGNETIC PARTICLE INSPECTION MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83.

10 EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED

11 PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE. MS9524-04

DASH NUMBER

BASIC MS NUMBER

MS9524-04 INDICATES - BOLT, MACHINE, HEXAGON HEAD, 5625-18 UNJF-3A, LENGTH .875.

NOTES

1 ALL DIMENSIONS IN INCHES.

2 DO NOT USE UNASSIGNED PART NUMBERS

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4 REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6 AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 2 FEB 68 REVISED © FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for requisitions and shall be made from this document

P.A. NAVY-AS Other Cust ARMY-AV AIR FORCE-99	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .5625-18 UNJF-3A	MILITARY STANDARD MS9524
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0988

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.