METRIC

DOD-P-63464/2A
21 April 1982
SUPERSEDING
DOD-P-63464/2
7 December 1979

MILITARY SPECIFICATION SHEET

PIN, GROOVED, HEADLESS-LONGITUDINAL TAPER GROOVE, CORROSION-RESISTANT STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pins described herein shall consist of this specification and the latest issue of DOD-P-63464.

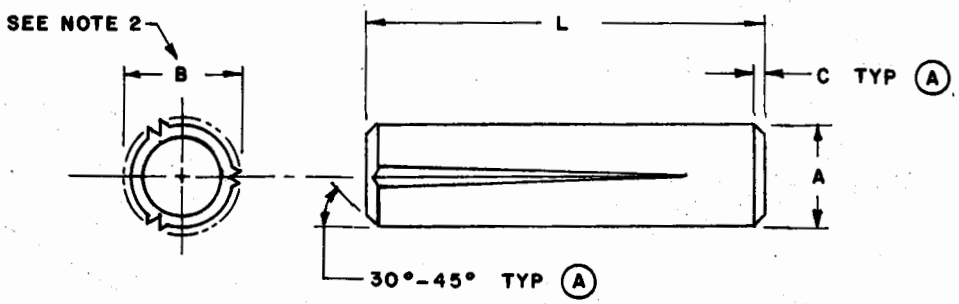

NOTES:

1. All dimensions are in millimeters.
2. Diameter "B" is the expanded diameter as measured with a "GO" and "NOT GO" ring gage.

(A) FIGURE 1. PIN, GROOVED, HEADLESS-LONGITUDINAL TAPER GROOVE.

(A) denotes changes

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: CRES, 300 series.

2. Surface treatment: Cleaning and descaling.

3. Part number: Consists of the letter "D", the basic number of this specification sheet and dash number taken from table I.

Example: D63464/2-01516

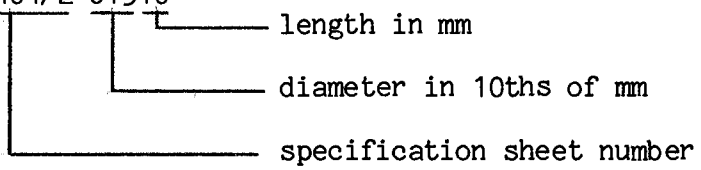

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. (A)

Nom size		1.5		2		2.5		3		4		5		6	
A Dia	max	1.50		2.00		2.50		3.00		4.00		5.00		6.00	
	min	1.47		1.97		2.47		2.97		3.95		4.95		5.95	
Recm hole size	max	1.54		2.05		2.55		3.05		4.06		5.07		6.08	
	min	1.50		2.00		2.50		3.00		4.00		5.00		6.00	
C Chamfer length	max	0.4								0.8					
L ±0.25 Length		Dash no	B Dia +0.05 -0.00	Dash no	B Dia +0.05 -0.00	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05
6.00		01506	1.58	02006	2.10										
8.00		01508	1.58	02008	2.10										
10.00		01510	1.58	02010	2.10	02510	2.65	03010	3.20	04010	4.20				
12.00		01512	1.58	02012	2.10	02512	2.65	03012	3.20	04012	4.20	05012	5.25		
16.00		01516	1.58	02016	2.10	02516	2.65	03016	3.20	04016	4.20	05016	5.25	06016	6.20
20.00		01520	1.55	02020	2.05	02520	2.60	03020	3.15	04020	4.20	05020	5.25	06020	6.20
26.00						02526	2.60	03026	3.15	04026	4.15	05026	5.20	06026	6.20
30.00								03030	3.15	04030	4.15	05030	5.20	06030	6.20
40.00										04040	4.15	05040	5.20	06040	6.15
50.00												05050	5.20	06050	6.15
60.00														06060	6.15
70.00														06070	6.15

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AT, EA
DLA - IS
NSA - NS

User activities:
Army - ME, MI
Navy - MC, YD

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5315-0361)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.