
FED SUPCLASS
4730

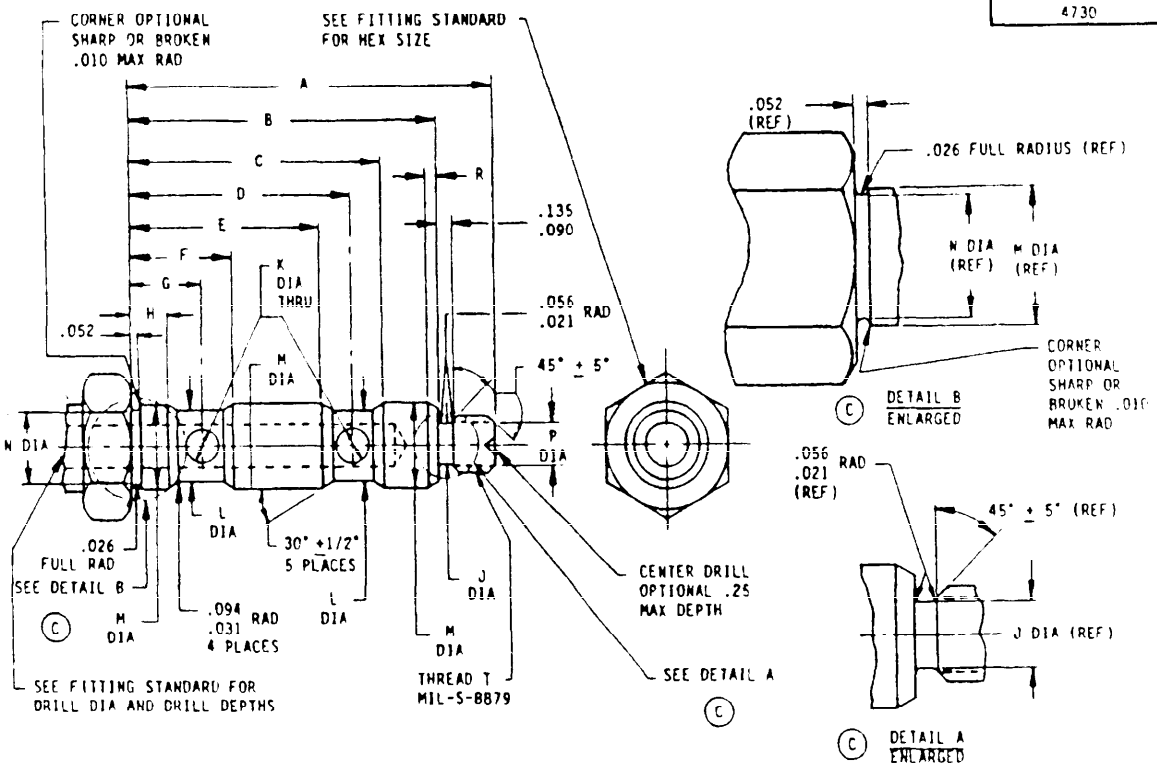

© DESIGN STANDARD

SIZE	THREAD "T" MIL-S-8879	A ±.031	B	C	D	E	F	G	H	J ±.005	K ±.003	L ±.005	M ±.0004	N	P ±.005	R
LOW FLOW	.4375-20 UNJF-3A	2.531	2.094	1.726	1.540	1.354	.726	.540	.354	.363	.189	.433	.4989	.425	.365	.060
HIGH FLOW	.5625-18 UNJF-3A	2.969	2.469	2.077	1.820	1.563	.891	.634	.377	.486	.300	.740	.8114	.738	.480	.065

1. ALL OUTSIDE MACHINED SURFACES FINISHED TO 125 RHR MAX, EXCEPT AS NOTED.
2. ALL INSIDE MACHINED SURFACES FINISHED TO 250 RHR MAX, EXCEPT AS NOTED.
3. M MACHINED SURFACES FINISHED TO 16 RHR MAX AND CONCENTRIC TO EACH OTHER WITHIN .0005 TIR.
4. © SURFACE FINISH IN ACCORDANCE WITH ANSI B46.1.
5. L AND M DIA AND THREAD T MUST BE CONCENTRIC WITHIN .005 TIR.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
7. FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS.
8. CERTAIN PROVISIONS (SCREW THREADS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.
9. © THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.
10. © IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
11. © REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

© INACTIVE FOR NEW DESIGN AFTER 31 DEC 1987

© DENOTES CHANGES

APPROVED 15 FEB 56 — REVISED (A) 20 NOV 57 (B) 27 JUNE 69 (C) 27 JULY 87

USER SYMBOLS
ARMY - GL, CR, ER, ME, AT

REVIEWER SYMBOLS
NAVY - AS
USAF - 82
ARMY - AV
DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft or coalition should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repository use should be made from this document.

AMSC N/A

P A NAVY — AS Other Cust USAF - 99 ARMY - AV	INTERNATIONAL INTEREST SEE NOTE B	TITLE FITTING END, BOLT CLUSTER FITTING, DOUBLE PORT	MILITARY STANDARD MS21934
PROCUREMENT SPECIFICATION NONE	SUPERSEDES MS21934 (ASG) ©		SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 4730-0080

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.