
...document has been approved by the ... of the Air Force and is mandatory for use by ... activity. All other military and ... are required ... this standard where suitable

REV STATUS OF SHEETS

SHT	REV
1	D
2	D

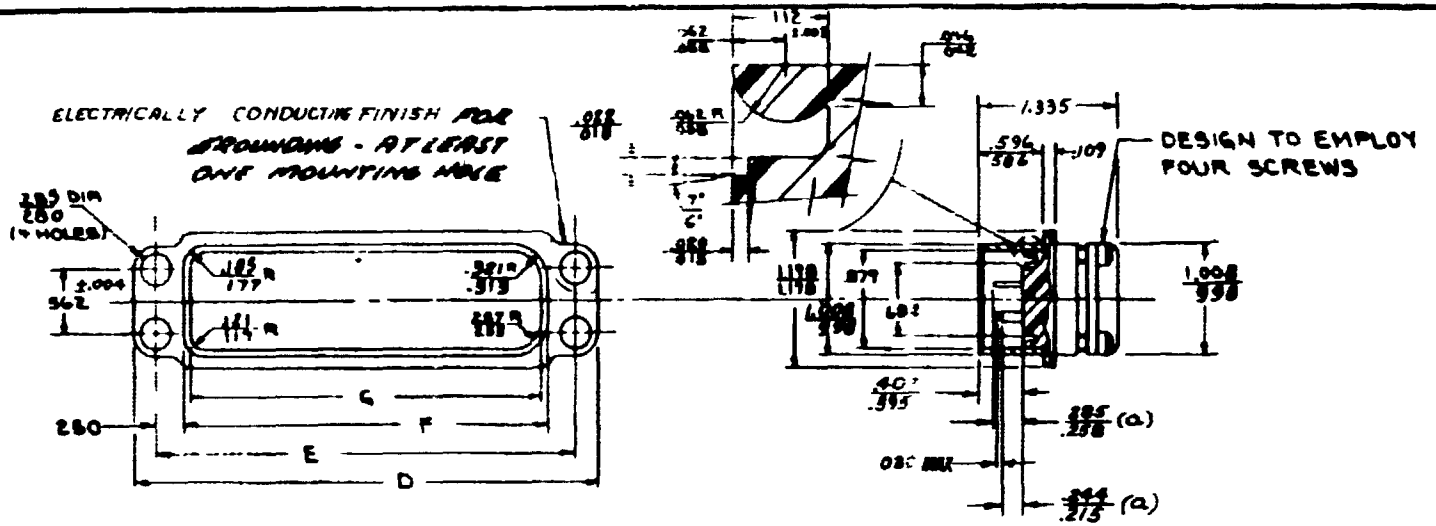

STYLE P (PIN INSERT)

ENVIRONMENT RESISTANT (R) RECEPTACLES

SHELL SIZE	D ±.005	E ±.004	F ±.005	G								FOR INSERT ARRANGEMENT SEE DWG.
A	4296	3875	3375	3.251								MS 24288
B	2866	2445	1948	1821								MS 24288
C	2421	2000	1.516	1.392								MS 24288

(a) DIMENSION ON PIN CONTACT LOCATION APPLIES WHEN CONTACTS ARE PLACED IN INSERTS FOR INSPECTION OR APPLICATION.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES - DECIMALS ± 003

THIS STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF THE AIR FORCE AND IS MANDATORY FOR USE BY THAT DEPARTMENT ALL OTHER MILITARY ACTIVITIES ARE REQUIRED TO EMPLOY THIS STANDARD WHERE SUITABLE

REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN

MATERIALS - SEE PROCUREMENT SPECIFICATION

FOR MATING AND MOUNTING DETAILS SEE MS24287

SHEET 2 ISSUED

APPROVED 13 Oct 60 SUPERSEDED (A) 21 DEC. 1960 (B) 14 JAN 1961 (C) 15 JUN 1965 (D) 5 JAN 66

MILITARY STANDARD

CONNECTOR, ELECTRICAL, STYLE P


RACK AND PANEL, MINIATURE

MS24286 (USAF)

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T14:51Z
Check the source to verify that this is the current version before use.

FED SUP CLASS 5935

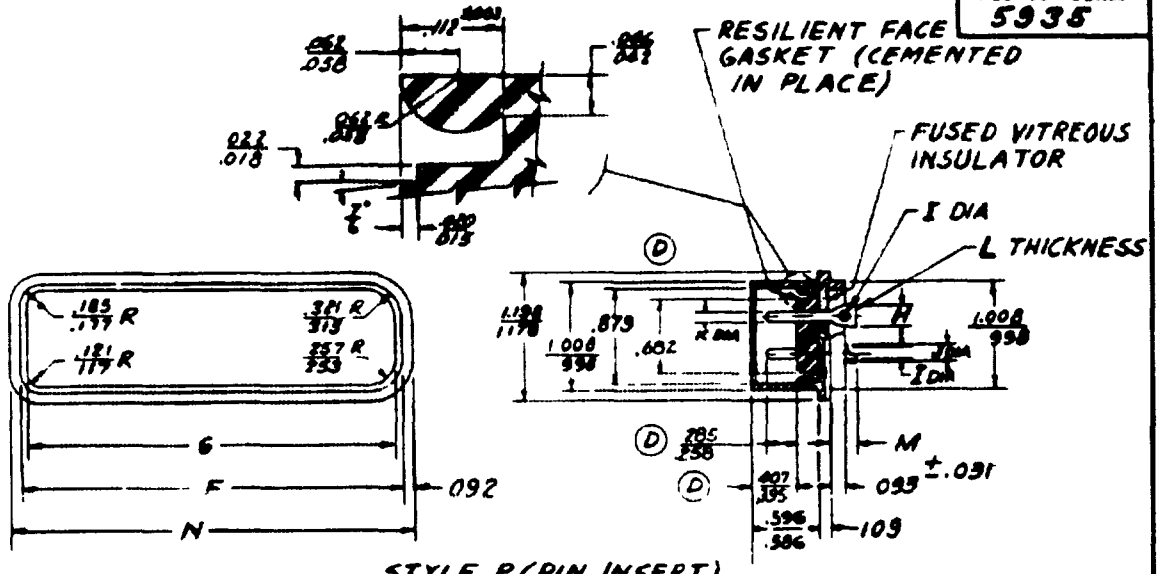

STYLE P (PIN INSERT)

HERMETIC (H) RECEPTACLES

SHELL SIZE	N ±.005	F ±.005	G				FOR INSERT ARRANGEMENT SEE DWG.
A	3.560	3.375	3.251				MS 24288
B	2.130	1945	1821				MS 24288
C	1685	1.516	1392				MS 24288

SIZE OF CONTACT	TYPE OF CONTACTS	H	I DIA	J DIA	K DIA	L	M MAX.
12	SOLDER CUP		.102/.098	.153/.147	.095/.093		.300
12	EYELET	.200	.102/.098		.095/.093	.035	
16	SOLDER CUP		.068/.066	.105/.101	.063/.061		
16	EYELET	.125	068/066		.063/.061	.025	
20	SOLDER CUP		.050/.048	.078/.076	.041/.039		.230
20	EYELET	080	.050/.048		041/.039	015	

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.003

REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN

FOR MATING AND MOUNTING DETAILS SEE MS 24287

REVISED (D) (6)

APPROVED

P.A. USAF - 11 Other Cust	TITLE CONNECTOR, ELECTRICAL, STYLE P, RACK AND PANEL, MINIATURE	MILITARY STANDARD MS24286 (USAF)
PROCUREMENT SPECIFICATION MIL-C-26518	SUPERSEDES	SHEET 2 OF

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GPO 806837

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.