INCH-POUND

A-A-52299
January 29, 1992

COMMERCIAL ITEM DESCRIPTION

LEVELS, SURVEYING: LOCATORS, HAND-TYPE

The General Services Administration has authorized the use of this commercial item description in preference to Military specification GG-L-261D.

This description covers two types of hand-type surveying levels used for determining a horizontal line of sight.

Salient characteristics.

Classification.

Types. Levels furnished under this specification shall be the following types.

Type I - Non-Telescoping, no field of view magnification and 4X magnification of level bubble.

Type II - Telescoping (draw tube), 2X magnification of field of view, and 4X magnification of level bubble.

Design and construction: Handheld optical surveying levels shall conform to the requirements identified herein and to standard commercial practice for field-type optical instruments. While a round tube is preferred for the tubular body of these surveying levels, the tubular body may be square, rectangular, oval, or any other suitable shape. The levels shall have a stabilized internal focusing arrangement to accommodate the individual eye. An image of the level indicating bubble, magnified four times, shall be seen in the right or left side of the viewed field. A telescope lens providing this magnification shall be adjustable to suit different eyes. All parts of the surveying levels shall be constructed to close tolerances and fitted together so that the mechanism cannot go out of adjustment. Each surveying level shall have a neck cord and a

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and other data which may improve this document should be sent by letter to: Commander, U.S. Army Belvoir Research, Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606.

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

neck cord fastening mechanism to enable the user to have easy and instant access to the instrument. A suitable carrying case shall be provided with each surveying level. The surveying levels shall be protected against the ingress or penetration of dust. All type I and II surveying levels shall include the following:

1. A tubular body having internally threaded ends to accommodate an eyepiece lens assembly.
2. An eyepiece at one end of the body.
3. An objective lens at the other end of the body.
4. A spirit level mounted such that the bubble is centered when the line of sight of the surveying level is horizontal.
5. A reflector or prism assembly and 4X magnifier which are located such that the spirit level is visible in the side of the field of view of a person sighting through the eyepiece.

Type I. The body of type I surveying levels shall be a non-telescoping body and the field of view shall be viewed without magnification. Type I surveying levels shall be not more than 6.5 inches long.

Type II. The body of type II surveying levels shall be a telescoping body and the field of view shall be viewed with 2X magnification. Type II surveying levels shall be not more than 6.5 inches long with the telescope fully retracted.

Materials:

Metal. The surveying levels shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environments to which the item may be exposed.

Glass. The front panel glass shall be float or plate, sheet of minor quality.

Leather. Leather shall be cattlehide, selected, treated and finished for bag and case construction.

Artificial leather. Artificial leather shall be cloth coated, vinyl resin, expanded layer and shall be mildew resistant.

Accuracy. When the image of the center of the bubble and the index mark of the vial are coincident, the line of sight shall not deviate from a level line more than 0.25 percent gradient.

Carrying case. A sewed leather or artificial leather carrying case with belt loop compatible with a military belt, designed to fit and secure the surveying hand level specified herein, shall be provided.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:08Z
Check the source to verify that this is the current version before use.

Workmanship. All parts, components, and assemblies of the surveying level and carrying case shall be clean and free of sand, dirt, fins, pits, flux, and other harmful extraneous material. All edges shall be rounded or chamfered.

Certification of commercial item. The contractor shall certify that the product offered to the Government meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product as the manufacturer's current product offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric Products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Commercial Item Description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Quality assurance: The surveying levels shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.


1. Design not as specified.
2. Type not as specified.
3. Material not as specified.
4. Accuracy not as specified.
5. Carrying case not as specified.
6. Workmanship not as specified.
7. Packaging and marking not as specified.

Regulatory requirements. In accordance with Federal Acquisition Regulation, section 23.403, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing the contractor's employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:08Z
Check the source to verify that this is the current version before use.

Part or identification number (PIN). Levels conforming to this CID shall be identified by the part number configuration shown below. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part numbers are not required to be placed on the product or container.

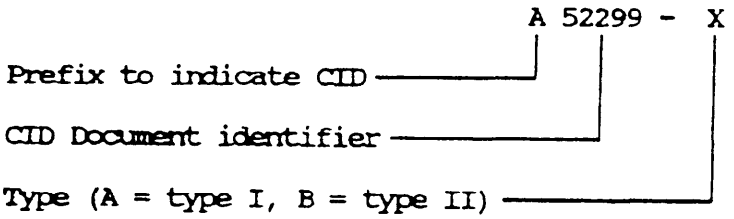

Notes: The procuring agency should specify the preferred options permitted herein and include the following information in procurement documents:

1. Title, number, and date of this item description.
2. Purchaser should specify type required.
3. When the commercial item description is used for acquisition, the commercial item certification clause must appear in the solicitation.

FED-STD-376 is available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

The following are suggested sources of supply for this item description (Competition is not limited to these sources.):

1. The Lietz Co., 9111 Barton Street, P. O. Box 2934, Overland Park, KA 66201.
2. John Woods Survey Equipment Limited, 2380 Midland Avenue, Scarborought, Ontario, Canada, M1S1P8.
3. Warren-Knight Instrument Co., 2045 Bennett Rd., Philadelphia, PA 19116.

The preparing activity for this item description is the US Army Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606.

MILITARY INTEREST:

Custodians
Army - ME
Navy - YD
Air Force - 99

Review activity
Navy - MC
Air Force - 82
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITIES:

DOT - NHT
HHS - FHW
GSA - FSS
USDA - SCS

Preparing activity
Army - ME

Project 6675-0889

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.