MILITARY SPECIFICATION SHEET

MIXER STAGES, RADIO FREQUENCY, SINGLE BALANCED, TYPE N, BNC CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring mixer described herein shall consist of this document and the latest issue of Specification MIL-M-28837.


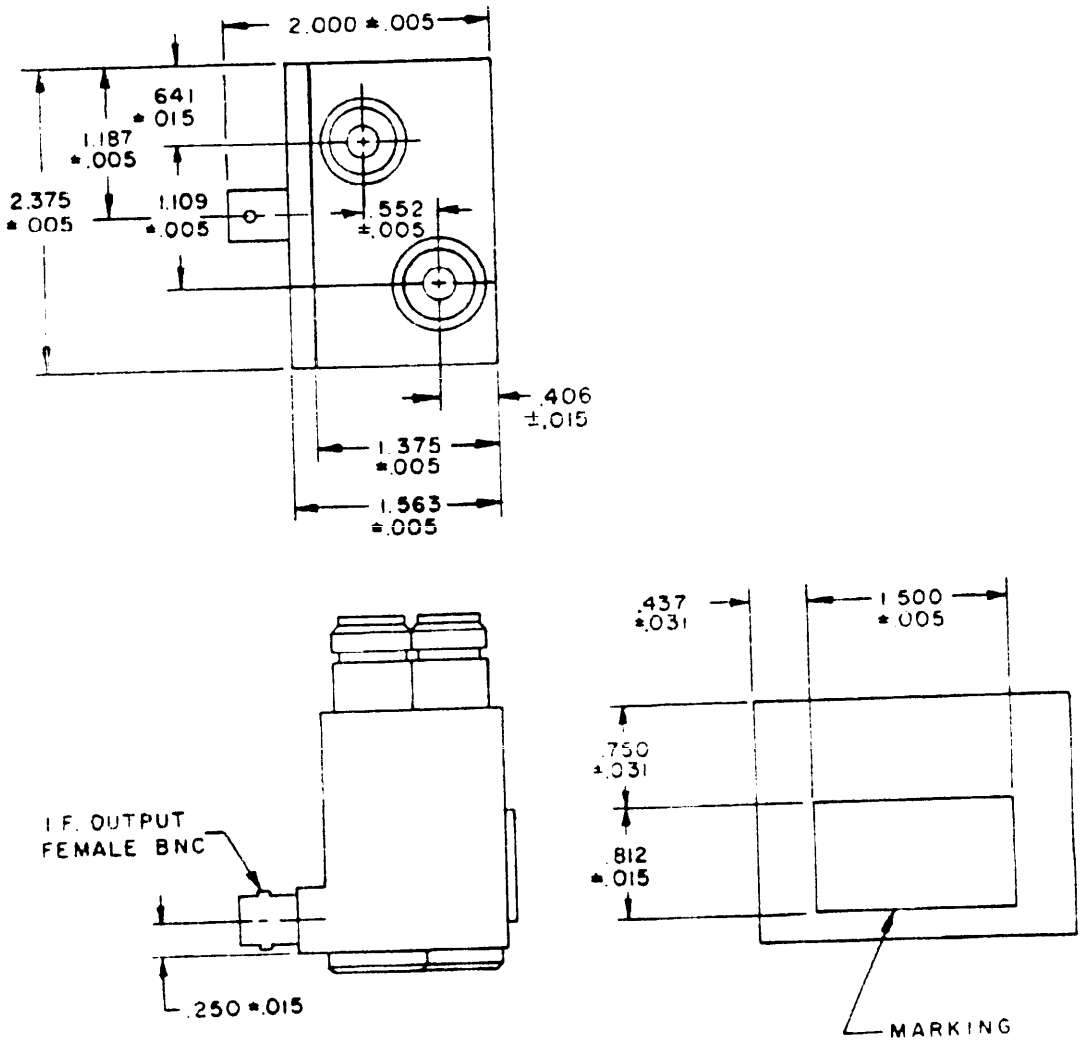


FIGURE 1. Outline drawing for P/N M28837/4-01N, 01S.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 20261O-20T19:23Z
Check the source to verify that this is the current version before use.

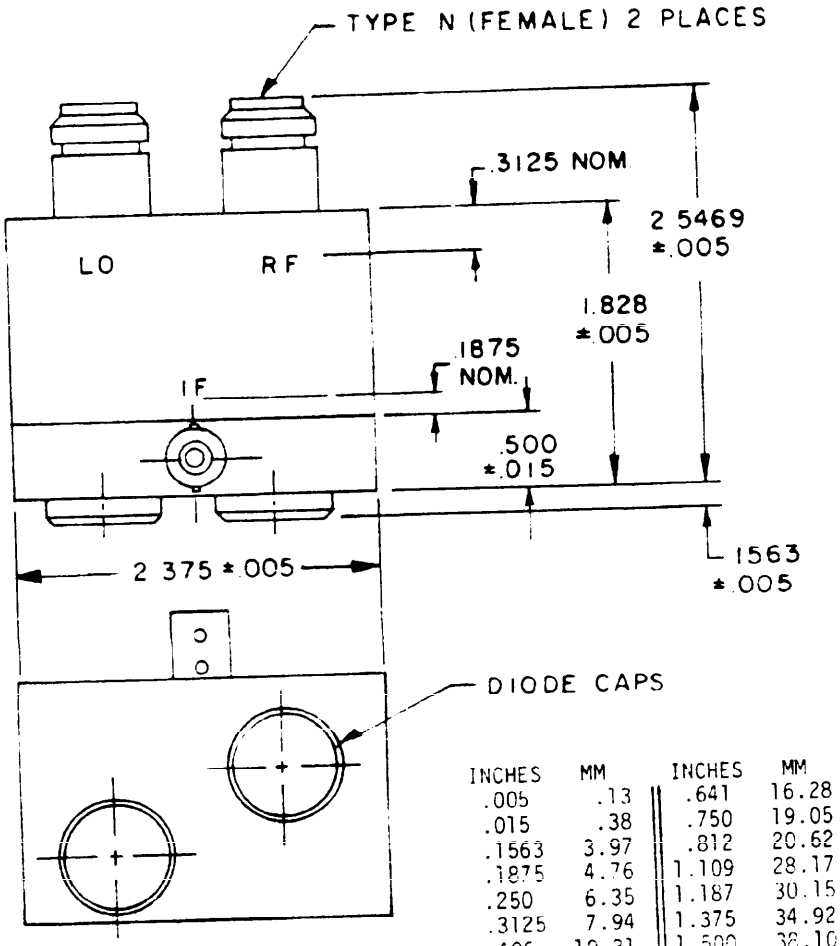

INCHES	MM	INCHES	MM
.005	.13	.641	16.28
.015	.38	.750	19.05
.1563	3.97	.812	20.62
.1875	4.76	1.109	28.17
.250	6.35	1.187	30.15
.3125	7.94	1.375	34.92
.406	10.31	1.500	38.10
.437	11.10	1.563	39.70
.500	12.70	2.375	60.32
.552	14.02	2.5467	64.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Outline drawing for P/N M28837/4-01N, 01S - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-20T19:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.

Frequency range: 4 to 8 GHz.

IF frequency: 30 MHz.

LO drivepower: 1 to 2 mW (nominal).

Diodes: 2 each, type 1N23E/ER.

IF output capacitance: 20 pF (nominal).

Material:
Body - Aluminum.
Contacts - Beryllium copper.
Connectors: Brass, silverplated and rhodium flashed.

Weight: 12 ounces (maximum) (340 grams).

Paint: Hammerton green.

Temperature:
Operating - -55°C to +100°C.

Electrical characteristics:
Noise figure (SSB): 8 dB (maximum).

VSWR: LO and IF 2:1.

Dust-cover seal: Applicable.

Part number: M28837/01N, 01S

NOTE: Mixers covered by this specification are substitutable for the following commercial types:

Dash number	FSN	Manufacturer's code	Commercial type
01N	5985-145-3479	07180	2-6188
	5985-145-3479	07180	2543BF

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - EC, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR
Navy - MC, CG, AS
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0840-4)

Source: https://assist.dla.mil -- Downloaded: 20260-20T19:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:23Z
Check the source to verify that this is the current version before use.