FED. SUP CLASS
4730

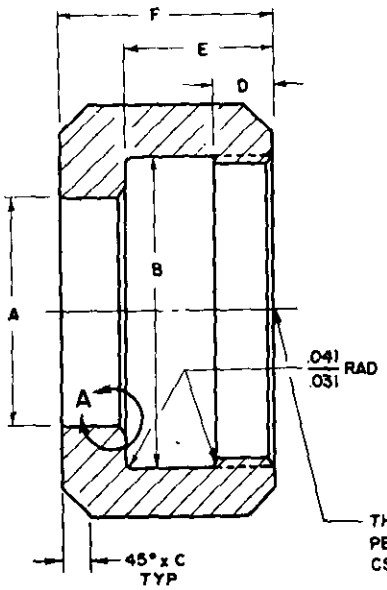

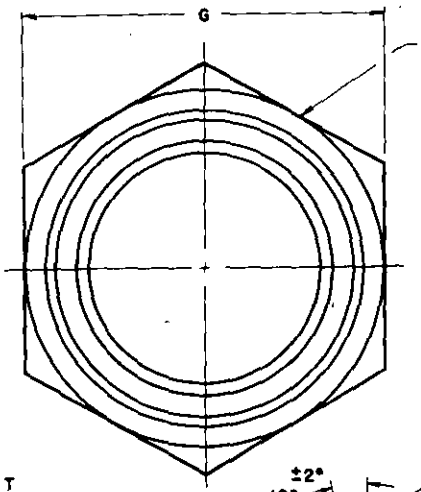



VIEW A



SECTION THRU THREAD PROFILE

MS PART NO.	TUBE O. D.	THREAD T UNJEF - 3B	A DIA ±.005	B DIA ±.004	C	D ±.005	E ±.005	F	G +.002 -.006	H DIA	APPROX WEIGHT LB/EA
MS27852-02	1/8	9/16 - 24	.277	.563	.057	.213	.584	.720	.625	.562	
MS27852-04	1/4	5/8 - 24	.379	.624	.063	.213	.576	.782	.688	.625	.034
MS27852-06	3/8	3/4 - 20	.491	.752	.071	.255	.625	.880	.812	.750	.051
MS27852-08	1/2	7/8 - 20	.593	.877	.082	.255	.635	.908	.938	.875	.066
MS27852-12	3/4	1-1/8 - 18	.820	1.127	.101	.283	.658	1.008	1.188	1.125	.113
MS27852-16	1	1-5/16 - 18	1.070	1.375	.120	.283	.616	1.031	1.438	1.312	.168

1. THREAD PD, HEX, A DIA AND B DIA, SHALL BE CONCENTRIC WITHIN .005 FIR.
2. MATERIAL: CORROSION RESISTANT STEEL AMS 5735.
3. CLEANING: FINISHED PARTS SHALL BE CLEANED PER MIL-F-27417.
4. SURFACE TEXTURE, IN ACCORDANCE WITH USAS B46.1, UNLESS OTHERWISE SPECIFIED, ALL MACHINED SURFACES TO BE 63 MICROINCHES.
5. BREAK EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
6. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES. DECIMALS ±.010, ANGLES ±5°.
7. DO NOT USE UNASSIGNED PART NUMBERS.
8. REFER TO MS27851 FOR ASSEMBLY.
   FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
   REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/3702

CANCELLED AFTER 16 JULY 1980. NO SUPERCEEDING STANDARD

Review activities: 11, 14, 19, 69, 85, & NAS

APPROVED 14 JULY 1967 REVISED A 16 July 1980

This standard has been approved by the Department of the AIR FORCE and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF 12 Other Cust	TITLE NUT, CRES, FLUID CONNECTION FITTING, HIGH PRESSURE	MILITARY STANDARD MS27852 (USAF)
PROCUREMENT SPECIFICATION MIL-F-27417	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.