
FED SUP CLASS
5330

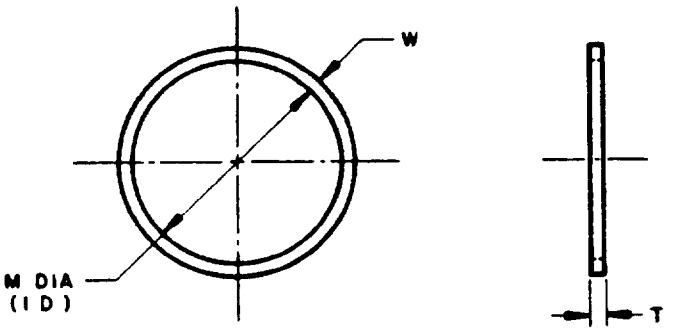

DASH NO	M DIA (I D)		T	W
004	080			
005	111			
006	125			
007	156			
008	187			
009	219			
010	250			
011	312	± 001	050	055
012	375		± 002	±.001
013	.440			
014	503			
015	565			
016	628			
017	690			
018	753			
019	815			
020	881			
021	943			
022	1 006			
023	1 068			
024	1 131	± 002		
025	1 193			
026	1 256			
027	1 318			
028	1 381			
110	374			
111	437			
112	499			
113	.562			
114	624			
115	687	± 001		
116	749			
117	815			
118	877			
119	.940		050	088
120	1 002			
121	1 065		± 002	± 001
122	1 127			
123	1 190			
124	1.252			
125	1 315	± 002		
126	1 377			
127	1 440			
128	1 502			

DASH NO	M DIA (I D)		T	W
129	1 565			
130	1.629			
131	1 691			
132	1 754			
133	1 816			
134	1 879			
135	1 942			
136	2.004			
137	2.067			
138	2.129		.050	.088
139	2 192	± 002		
140	2 254		±.002	± 001
141	2 317			
142	2 379			
143	2 442			
144	2 504			
145	2 567			
146	2.629			
147	2.692			
148	2.754			
149	2.817			
210	.753			
211	.815	±.001		
212	.878			
213	940			
214	1 003			
215	1 065			
216	1 128			
217	1 190			
218	1 253			
219	1 315			
220	1 378			
221	1 440			
222	1 503	± 002		
223	1 629		050	119
224	1.754			
225	1.880			
226	2.005		± 002	± 001
227	2 130			
228	2.255			
229	2.380			
230	2 505			
231	2 630			
232	2.755			

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

(D)

APPROVED 20 MAY 68 REVISED (A) 29 MAR 71 (B) 12 AUG 71 (C) 9 MAR 78 (D) 6 JAN 78

P.A. USAF - 99
Other Coast
NAVY - AS
ARMY - MR

TITLE
RETAINER, PACKING BACKUP, CONTINUOUS RING
TETRAFLUOROETHYLENE

MILITARY STANDARD
MS 27595

PROCUREMENT SPECIFICATION
MIL-R-8791

SUPERSEDES

SHEET 1 OF 2

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Review activities:
ARMY - WC - AV
NAVY - SH
AIR FORCE - 99

User activities
DISC - 15

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5330

DASH NO	M DIA (I D)		T	W
233	2 880			
234	3.005			
235	3 130			
236	3 255			
237	3 380			
238	3 505			
239	3 630	± 002	050 ± 002	119 ± 001
240	3 755			
241	3 880			
242	4 005			
243	4.130			
244	4 255			
245	4.380			
246	4 505			
247	4 630			
325	1 497			
326	1 622			
327	1 748			
328	1.873			
329	1 998			
330	2 123			
331	2.248			
332	2 373			
333	2.498			
334	2 623		073	185
335	2 748			
336	2 873	± 002	±.002	• 001
337	2 998			
338	3.123			
339	3.248			
340	3 373			
341	3 498			
342	3 623			
343	3.748			
344	3 873			
345	3.998			
346	4 123			

DASH NO	M DIA (I D)		T	W
347	4 248		073 ± 002	185 • 001
348	4 373			
349	4.498			
425	4 501			
426	4 627			
427	4 752			
428	4 877			
429	5 002			
430	5 127			
431	5 252			
432	5 377	± 002		
433	5 502			
434	5 627			
435	5 752			
436	5 877			
437	6 002			
438	6 252			
439	6 502			
440	6 752			
441	7 002		108	236
442	7 252			
443	7 502		• 002	± 001
444	7 752			
445	8 002			
446	8 502			
447	9 002	± 001		
448	9 502			
449	10 002			
450	10 502			
451	11.002			
452	11 502	± 004		
453	12.002			
454	12 502			
455	13 002			
456	13.502			
457	14 002	± 005		
458	14 502			
459	15 002			
460	15 502			

(D)

1 SURFACES MUST BE SMOOTH AND FREE FROM IRREGULARITIES EDGES MUST BE CLEAN AND SHARP

2 DIMENSIONS IN INCHES

3 FOR USE IN PACKING GROOVES CONFORMING TO SPECIFICATION MIL-P-5514, EXCEPT NOT FOR USE IN O D (PISTON) APPLICATIONS USING MIL-G-5514 A & B GLANDS

4 FOR SINGLE TURN RING (CUT) SEE MS28774

(D)

APPROVED 20 MAY 68 REVISED (D)

P A USAF - 99 Other Cust NAVY - AS ARMY - MR	TITLE RETAINER PACKING BACKUP, (ONE PIECE) RING TETRAFLUOROETHYLENE	MILITARY STANDARD MS 27595
PROCUREMENT SPECIFICATION MIL-R-6791	SUPERSEDES	SHEET 2 OF

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

User activities:
Review activities:
ARMY - WC - AV
NAVY - SH
AIR FORCE - 99, DISC - 15

This standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.