

FED. SUP CLASS
4730

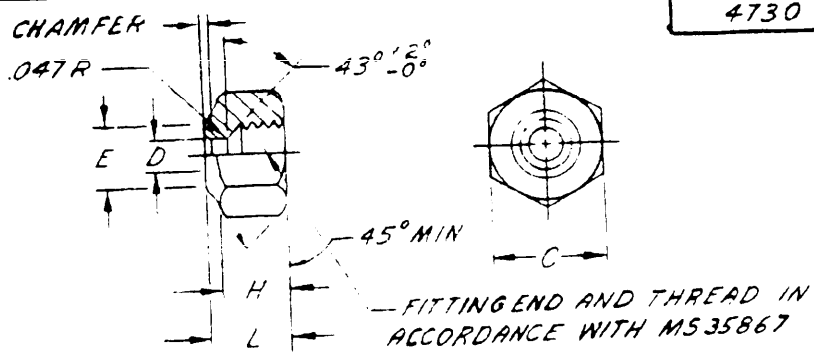

FLARE NUT

DASH NUMBER	SIZE	C NOM	D MIN	D MAX	MIN DIA E	H ±.031	L ±.020
-2	1/4	.625	.255	.260	.470	.440	.590
-3	3/8	.812	.380	.385	.590	.500	.690
-4	1/2	.937	.505	.510	.750	.560	.810
-5	5/8	1.062	.630	.635	.940	.750	.940
-6	3/4	1.312	.755	.760	1.120	1.000	1.120



FLARE SEAL BONNET

DASH NUMBER	SIZE	W MAX	X ±.0016	Y MIN
-2B	1/4	.360	.220	.220
-3B	3/8	.550	.360	.340
-4B	1/2	.660	.470	.410
-5B	5/8	.770	.610	.490
-6B	3/4	.950	.720	.560

NOTES:

1. FLARE NUTS SHALL BE MADE FROM SAE CA377 BRASS FORGINGS.
2. FLARE SEAL BONNETS SHALL BE MADE FROM SAE CA102, CA110, OR CA122 COPPER.
3. DIMENSIONS IN INCHES.
4. DIMENSIONS AND TOLERANCES NOT SHOWN SHALL BE IN ACCORDANCE WITH SAE HANDBOOK FOR REFRIGERATION FITTINGS, SAE J513.
5. DASH NUMBERS REPRESENT 1/8 INCH INCREMENTS IN SIZE, SUFFIX B DENOTES FLARE SEAL BONNET.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
8. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS35872-2

APPROVED 9 JUNE 1958 REVISED (A) 15 NOV 67 (B) 8 MAY 70 (C) 24 SEPT 75

P.A.	TITLE	MILITARY STANDARD
ARMY - GL OTHER CUST NAVY - YD USAF - 82	FLARE NUT AND FLARE SEAL BONNET, REFRIGERATION	MS 35872
Procurement Specification: NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

ARMY - ME, SH
NAVY - YD, MC
USAF - 82
DSA - CS

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.