INCH-POUND
A-A-55310
June 03, 1997

COMMERCIAL ITEM DESCRIPTION

SWEATPANTS, PHYSICAL FITNESS UNIFORM

The General Services Administration has authorized the use of this commercial item description in preference to MIL-S-44215.

1. SCOPE. This commercial item description covers one type of a knitted jersey fleece sweatpants. The sweatpants are intended for use as a component of the Physical Fitness Uniform by personnel of the Department of Defense.

2. SALIENT CHARACTERISTICS

2.1 Description. The sweatpants shall be all-around waist design with drawcord and elastic gathered ankles. The sweatpants shall have a gusset inserted at the crotch area to improved fit and reinforcement.

2.2 Materials.

2.2.1 Basic material. The cloth for the sweatpants shall be a jersey knit fleece cloth consisting of 55 (+/-5)% cotton for comfort and absorbency, 1-2% rayon or polyester and the remaining percentage acrylic fiber or a blend of fibers with comparable properties. The cloth for the gusset shall be a plaited 1X1 rib knit consisting of 47 (+/-5)% cotton, 2-3% rayon or polyester and the remaining percentage acrylic fiber or a fiber with comparable properties. The color shall be light Heather Gray 446. Testing shall be in accordance with Table I. The sweatpants shall be cut in the wale direction.

2.2.2 Thread. The thread for seaming and stitching shall be 2-ply cotton-covered polyester or spun polyester. The color shall be light gray, DoD shade A, C.A. 66064 and shall show colorfastness to laundering, perspiration and light. Testing shall be in accordance with Table I.

Beneficial comments (recommendations, additions, deletions, clarifications) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FNS, 2800 South 20th Street, Philadelphia, PA 19145-5099 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter..

AMSC N/A **FSC 8415**

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

TABLE I. - Requirements

CHARACTERISTICS	REQUIREMENTS MINIMUM	REQUIREMENTS MAXIMUM	TEST METHOD
WEIGHT OZ./SQ. YD.:			
Jersey knit fleece	8.5 (+/-0.5)	_____	ASTM D3776
Rib knit	8.5 (+/-0.5)	_____	
CONSTRUCTION:			
Jersey Knit Fleece:			ASTM D3887
Wales per inch	19	_____	
Courses per inch	25	_____	
Rib Knit:			
Wales per inch	18	_____	
Courses per inch	25	_____	
BURSTING STRENGTH (lbs)			
Jersey knit fleece	75	_____	ASTM D3787
Rib knit	90	_____	
DIMENSIONAL STABILITY	1/ AND 2/		AATCC-135
COLORFASTNESS (MIN.)			
Jersey and rib knit			
Laundering:	"4"		AATCC-61, TM 3A
Light:	"4"		AATCC-16. Option A
Perspiration:	"4"		AATCC-15
Crocking	3.5	_____	AATCC-8
pH			
Jersey and rib knit	5.0	8.5	FED-STD-2811
BREAKING STRENGTH (LBS)			
Thread	1.8	_____	ASTM D2256
Drawcord	150	_____	
FIBER IDENTIFICATION			
Cotton:			
Jersey knit fleece	55 (+/-5)%		ASTM D276 or
1x1 rib knit	47 (+/-5)%		AATCC-20
Rayon or polyester or equivalent	1 to 2%		
Acrylic or equivalent	Remaining percentage		

1/ The finished sweatpants, after five (5) launderings and dryings shall not elongate more than 5.5 percent or shrink more than 8.0 percent lot average with no sample unit to exceed 10.0 percent for the outseam and shall not shrink more than 10.0 percent lot average with no sample unit to exceed 12.0 percent for the thigh.

2/ The sweatpants shall be tested for shrinkage by using normal machine cycle 120°(+/-5°F) washing temperature, and dryer setting 140°F. The sweatpants shall not be moistened or pressed before measuring. Measurements shall be taken to the nearest 0.1 inch with the sweatpants laid flat. Elongation shall be reported with a minus (-) sign.

2.2.3 Drawcord. The drawcord for the hood shall be 3/16 inch diameter, 100 percent filament nylon or a fiber with comparable properties having a minimum breaking strength of 150 pounds. The color shall be light gray, Dod shade AX, C.A. 66064 and shall show colorfastness to laundering. Testing shall be in accordance with Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

2.2.4 Rubber band. The rubber band for the ankles shall be synthetic or natural rubber approximately 1/4 inch wide, 4-1/2 inches long and 3/64 inch thick.

2.2.5 Webbing, elastic. The elastic webbing for the waist for proper fit and appearance shall be woven using 12/2 ply cotton warp yarns (crochet) and a elastomer made of rubber wrapped with 3-ply cotton yarn and then a 1-ply cotton yarn or fibers with comparable properties. The width shall be 7/8 (+/- 1/16) inch and testing shall be as specified in Table I.

2.3 Preshrinking. The knitted cloth shall be preshrunk before being cut, such that the sweatpants will meet all shrinkage requirements specified in Table I.

2.4 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written commercial item description and Figure 1, the written commercial item description shall govern.

2.5 Patterns. Government patterns shall be furnish upon request. Commercial patterns shall be used.

2.6 Finished measurements. The sweatpants shall be provided in the following measurements:

TABLE II. - Finished measurements (in inches)

	X-SMALL	SMALL	MEDIUM	LARGE	X-LARGE	TOL.
(A) 1/2 Waist relaxed	11-1/2	12-1/2	13-1/2	14-1/2	15-1/2	+3/4, -1/2
(B) 1/2 Waist extended	16-1/2	18-1/2	20-1/2	22-1/2	24-1/2	+/-1/2
(C) Inseam	29	30	31	32	33	+/-3/8
(D) Outseam	38-1/2	40	41-1/2	43	44-1/2	+/-3/4
(E) Front rise and gusset	14-1/2	15	15-1/2	16	16-1/2	+/-3/8
(F) Back rise	14-1/2	15	15-1/2	16	16-1/2	+/-3/8
(G) Leg gusset width	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	+/-1/4
(H) Leg gusset length	8-3/4	8-3/4	8-3/4	8-3/4	8-3/4	+/-1/4
(I) Thigh (at gusset)	13-1/4	14	14-3/4	15-1/2	16-1/4	+/-1/2
(J) Bottom leg hem	1	1	1	1	1	+/-1/4
(K) Crotch gusset width	10	10	10	10	10	+/-1/2
(L) Crotch gusset Length	2-14	2-1/4	2-1/4	2-1/4	2-1/4	+/-1/2

(A) 1/2 Waist relaxed: Lay flat, measure side to side, relaxed.
(B) 1/2 Waist extended: Extend waist until body fabric is flat (but not stretched). Measure side to side (on knit fabric the waist can extend more than the measurement).
(C) Inseam: Measure seam from center of crotch to legend.
(D) Outseam: Top of sweatpants at waist to legend, following natural shape of side seam.
(E & F) Front rise/back rise: Measure from top of sweatpants at waist to fold in crotch gusset, do not stretch.
(G) Leg gusset width: Measure relaxed, where two (2) gussets are joined.
(H) Leg gusset length: Center of seam where two (2) gussets are joined to the seam.
(I) Thigh: Measure from leg gusset seam to fold of outseam, parallel to the direction of the wales.
(J) leg hem: Width of hem including stitching.
(K) Crotch gusset width: Measure relaxed at center.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

(L) Crotch gusset length: Measure front rise point to back point.

2.7. Labels/marking. A commercial-type label shall include the contractor's name, contract number, size and National Stock Number (NSN). The commercial label shall include fiber and laundering information. Colorfastness to laundering shall apply. The commercial type label shall be attached to the inside of the sweatpant. The care instructions shall read as follows.

CARE INSTRUCTIONS
Hand or machine wash in cold or warm water (maximum 120°F)
Do Not Bleach or Iron. Tumble Dry low setting (maximum 140°F)

2.7.1 Barcode label. The sweatpants shall have a printed bar code label that is clearly legible and readable by scanner. The bar coding element shall be a 13 digit national stock number (NSN). The label shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified.

3. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own standards and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

4.2 Visual examination. The sweatpants shall be examined for the following defects: Any hole, cut, or tear; any variation of shade; any spot or stain (outside), rancid odors, burns or scorch; raw edges, open seams, thread ends not removed, any material defects, distorted parts or poor workmanship; color not as specified; any component part omitted; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5. Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue, Bldg. 4D
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

6.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Test Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.
Department of Defense Standards Shades for Threads

(Applications for copies of color cards should be addressed to the Color Association of the U.S., 200 Madison Avenue, New York, NY 10016)

6.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

MILITARY INTERESTS:

Custodians
Army - GL

Review Activities
Army - MD

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

Project 8415-0108

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

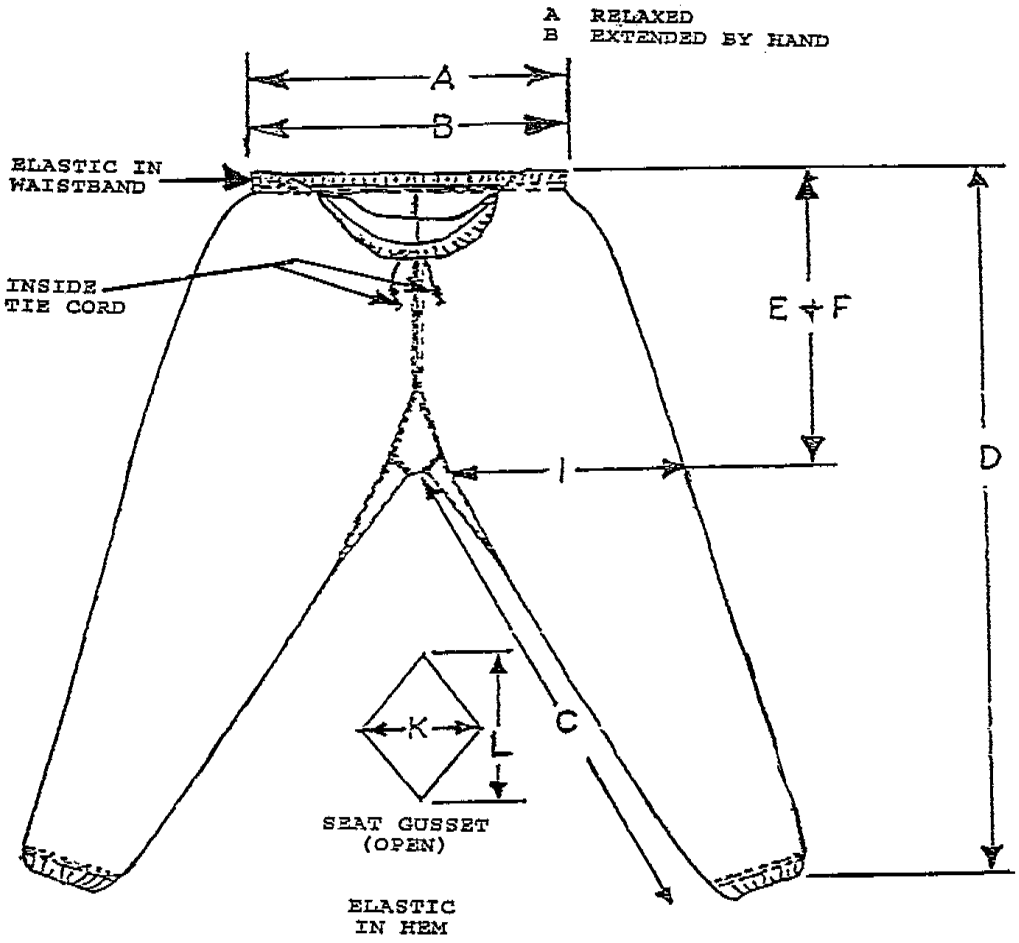

FIGURE 1.

SWEATPANTS, PHYSICAL FITNESS UNIFORM (PFU)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** A-A-55310	**2. DOCUMENT DATE (YYMMDD)** 970603

3. DOCUMENT TITLE SWEATPANTS, PHYSICAL FITNESS UNIFORM

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7. DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DEFENSE PERSONNEL SUPPORT CENTER	b. TELEPHONE *Include Area Code)* (1) Commercial (215) 737-3177 (2) AUTOVON 444-5457
c. ADDRESS *(Include Zip Code)* ATTN: DPSC-FNS 2800 SOUTH 20TH STREET PHILADELPHIA, PA 19145-5099	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.