INCH-POUND
A-A-55069
17 July 1992

COMMERCIAL ITEM DESCRIPTION

T-SHIRT, ATHLETE'S PHYSICAL FITNESS UNIFORM (PFU)

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-T-44214.

Classification. The T-shirt shall be of one type.

Description. The T-shirt shall have short-sleeves, a crew neck collarette, and hemmed bottom and sleeves (see figure 1). The T-shirt shall have the word ARMY in 3 inch (± 1/4 inch) in height by 5/8 inch (± 1/16 inch) in thickness letters (see figure 2) screen printed on the front (see Table IV). The overall width of the letters shall be 12 inches (± 1/4 inch). The color of the body and collarette shall be heather gray 467. The collarette shall be made of a double thickness of ribbed cloth and shall finish 1 inch (± 1/8 inch) wide. The sleeves and T-shirt bottom shall have a hem of 1 inch (± 1/4 inch) wide. All seams shall br overedge stitched and the gage of the stitching shall be 3/16 (± 1/16 inch). The letters shall be black thermal plastic base ink withstanding temperatures to 300° F.

Sizes. The T-shirt shall be provided in the following sizes:

X-Small (30-32)	Small (34-36)	Medium (38-40)
Large (42-44)	X-Large (46-48)	XX-Large (50-52)

NOTE: The sizes X-Small, Small, Medium, Large, X-Large, and XX-Large may be abbreviated as XSM, SM, MED, LG, XLG, AND XXLG.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

Basic material. The cloth for the body of the T-shirt shall be a jersey knit using a cotton/polyester blend yarn conforming to the requirements specified in Table I. The cloth for the collarette of the T-shirt shall be a 1 X 1 rib knit using a cotton/polyester blend yarn conforming to the requirements specified in Table II. The cloth for the body and collarette shall be preshrunk by a mechanical process prior to cutting the garments. The pre-shrinking process used shall not be identified by name or trademark on the finished garment or package.

NOTE: The use of dyes or compounds containing elementary sulfur capable of oxidation to sulfuric acid is prohibited. The dyes shall be chosen and applied so that the dyed and finished cloth shall contain no more labile sulfur than shown by the standard sample when tested in accordance with end item performance testing.

Table I.
Cloth for Body of T-Shirt

Characteristics	Requirements
Weight, ounces per square yard	5.8 ± 0.5
Wales per inch	20 (minimum)
Courses per inch	30 (minimum)
Bursting strength, pounds	75 (minimum)
Fiber content, percent:	
Cotton	50 ± 5
Polyester	Remainder

Table II.
Cloth for Collarette

Characteristics	Requirements
Weight, ounces per square yard	8.25 ± 0.75
Wales per inch	17 (minimum)
Courses per inch	25 (minimum)
Bursting strength, pounds	50 (minimum)
Fiber content, percent:	
Cotton	50 ± 5
Polyester	Remainder

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

Thread. The thread for the T-shirts shall be approximately a 50/2 (approx. 40 Tex), with minimum breaking strength of 2.7 pounds and maximum elongation of 35 percent constructed of a cotton, or a spun polyester, or a polyester-covered staple polyester core, or a high tenacity, textured polyester. The thread color shall be light grey to match the basic material for the T-shirt. The thread shall show colorfastness to laundering, perspiration, and light, equal to or better than a rating of "good".

Tape. The reinforcement tape for the shoulder shall be plain weave, unbleached cotton, 3/16 (±1/32 inch) wide, with a minimum warp breaking strength of 22 pounds. As an alternate, a 2 by 2 flat braid, natural white spun polyester tape, 1/8 (+1/16, - 0 inch) wide, with a minimum warpbreaking strength of 30 pounds may be used. The starch and protein content, including chloroform-soluble and water-soluble material, shall not exceed 4.0 percent. The tape shall not shrink more than 4.0 percent in the warp direction.

Label. A commercial type label is acceptable, provided that an additional printed cloth label containing the contractor's name, contract number, size and National Stock Number (NSN) is caught on the stitching of the commercial label. The commercial label shall include fiber content and laundering information.

Sizes and Measurements. The finished T-shirt shall conform to the measurements in Table III. See Figure 1.

Table III.

Finished Measurements (inches)

Sizes	Width A/	Length B/	Neck opening C/	Armhole D/	Sleeve under E/	Sleeve over F/	Sleeve opening G/
X-Small	18	27	16	8-1/2	3-1/2	6-1/4	5-3/4
Small	20	28	17	9	4	7	6-1/4
Medium	22	29	18	9-1/2	4-1/2	7-3/4	6-3/4
Large	24	30	19	10	5	8-1/2	7-1/4
X-Large	26	31	20	10-1/2	5-1/2	9-1/4	7-3/4
XX-Large	28	32	21	11	6	10	8-1/4
Tolerance	± 1	± 1	± 1	± 1/2	± 1/2	± 1/2	± 1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

A/ Width - from side to side with T-shirt laying flat but not stretched, measure across approximately 1 inch below the armhole.

B/ Length - with T-shirt laying flat, but not stretched, measure from the bottom edge of front to junction of shoulder seam and collarette.

C/ Neck opening - grasp collarette at center back and center front, form a straight line, but do not stretch, measure, and multiply by 2.

D/ Armhole - lay T-shirt flat, but not stretched, and measure from the intersection of top of sleeve and shoulder seam to bottom of underarm seam in a straight line.

E/ Sleeve under - with T-shirt laying flat, but not stretched, measure from bottom of underarm seam to end of sleeve hem along seam.

F/ Sleeve over - with T-shirt laying flat, but not stretched, measure from the intersection of the top of sleeve and shoulder seam to end of sleeve hem.

G/ Sleeve opening - with T-shirt laying flat, but not stretched, measure from folded edge to folded edge when sleeve hem is laid flat.

Marking. The black "ARMY" marking shall be screen printed on the front of the t-shirt as shown in Figure 1, and shall be placed according to Table IV. The printing shall show colorfastness to laundering when tested as specified in AATCC 61-1986, 1A test method, except the specimens shall be dried in an automatic tumble dryer at normal cycle. The test shall be performed a minimum of three times to imitate approximately 15 launderings.

Table IV.
Placement of "ARMY" marking

Size	Distance down from neck seam in inches (± 1/2 inch)	Distance from edge taken from just below armhole in inches (± 3/4 inch)
X-Small	3	3
Small	3-1/2	4
Medium	4	5
Large	4-1/2	6
X-Large	5	7
XX-Large	5-1/2	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

Workmanship. The finished T-shirt shall be clean, and all loose thread, lint, and foreign matter removed. The items shall be uniform in quality and shall be free from irregularities or defects which adversely affect appearance, performance, reliability, or durability.

Product Demonstration Model. When required, offerers shall submit a T-shirt of their intended production. The Product Demonstration Model shall consist of units independently developed. Product Demonstration Model shall be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models shall be retained by the government.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract.

Examination. Lots of T-shirts shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The inspection level for visual examination shall be II and the AQL, expressed in terms of defects per hundred units, shall be 1.5 for major defects and 4.0 for total defects. The sample unit is one T-shirt.

Dimensional Examination. The finished T-shirt shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one T-shirt; the inspection level shall be S-3 and the AQL shall be 4.0.

Defects.

Material Defects and Workmanship Damage

a. component part full, tight, or twisted
b. any hole, cut, tear, mend, drop stitch, loose knitted, miss knit, slubby yarn, streak, knitted in waste, permanent fold, pleat, or crease
c. an omitted part
d. seam; puckered, distorted, pleated, irregular or open, loose or tight stitch tension, broken or missing thread or stitch, needle chew
e. any twisted or caught part of T-shirt in any unrelated row of stitching

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

Shade Variations
a. shaded part, off shade, wrong shade, or shade variation
b. thread color not as specified

Cleanness
a. spot, stain
b. thread ends not trimmed

Label
omitted, incorrect, illegible or misplaced

Marking
a. any "ARMY" marking omitted, incorrect, illegible. or misplaced
b. not size specified

Measurements
a. not within specified tolerance
b. sleeve lengths unequal by more than 1/2 inch

End Item Performance Testing. The end item shall be tested for shrinkage as specified in Test Method 150-1987 of AATCC using normal machine cycle, ($120^{o} \pm 5^{o}$ F) washing temperature and cotton/sturdy dryer setting ($150^{o} \pm 10^{o}$ F). The T-shirt shall not be moistened or pressed before measuring. The completed T-shirt shall not shrink nor elongate more than 10 percent in width or length when tested. The measurements shall be taken to the nearest 0.1 inch with the T-shirt laid flat. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of T-shirts. The sample unit shall be one T-shirt. The acceptable quality level (AQL), expressed in terms of defects per one hundred units, shall not exceed a total of four defects, or one and a half major defects.

Inspection of packaging. The sampling and inspection for the preservation, packing, marking and palletization requirements shall be in accordance with MIL-STD-2073-1, Table II, Preservation Inspection Provisions for Method/Submethods of MIL-P-116. The applicable defect descriptions of this Table II shall be extended to include any intermediate and shipping containers and the unitized load. Also included shall be a count of the specified container quantity and identification of specified contents, e.g. All items within any one carton shall be limited to one type, class and size.

Packaging, Packing, Marking and Palletization.

Preservation. Each T-shirt shall be neatly folded and placed in a commercially acceptable polyethylene bag.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

Packing. Ninety-six T-shirts shall be packed in a fiberboard box conforming to style RSC-L, grade 275 of PPP-B-636. The inside dimensions of the box shall be approximately 24-1/2 inches in length, 16-1/2 inches in width and 12 inches in depth for X-Small to Small and 24-1/2 inches in length, 16-1/2 inches in width and 19-1/2 inches in depth for sizes Medium to XX-Large. The box shall be closed in accordance with the appendix of PPP-B-636.

Palletization. When specified, packed T-shirts shall be palletized on a 4-way entry pallet in accordance with load type 1a of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

Marking. All markings, including bar codes, on the unit pack, shipping containers and palletized loads shall be in accordance with MIL-STD-129,

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Custodian:
Army - GL

Civil Agency Coordinating Activity:
GSA-FSS

Review Activity:
Army - GL

Preparing Activity:
DLA-CT

Project No.
8415-0875

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

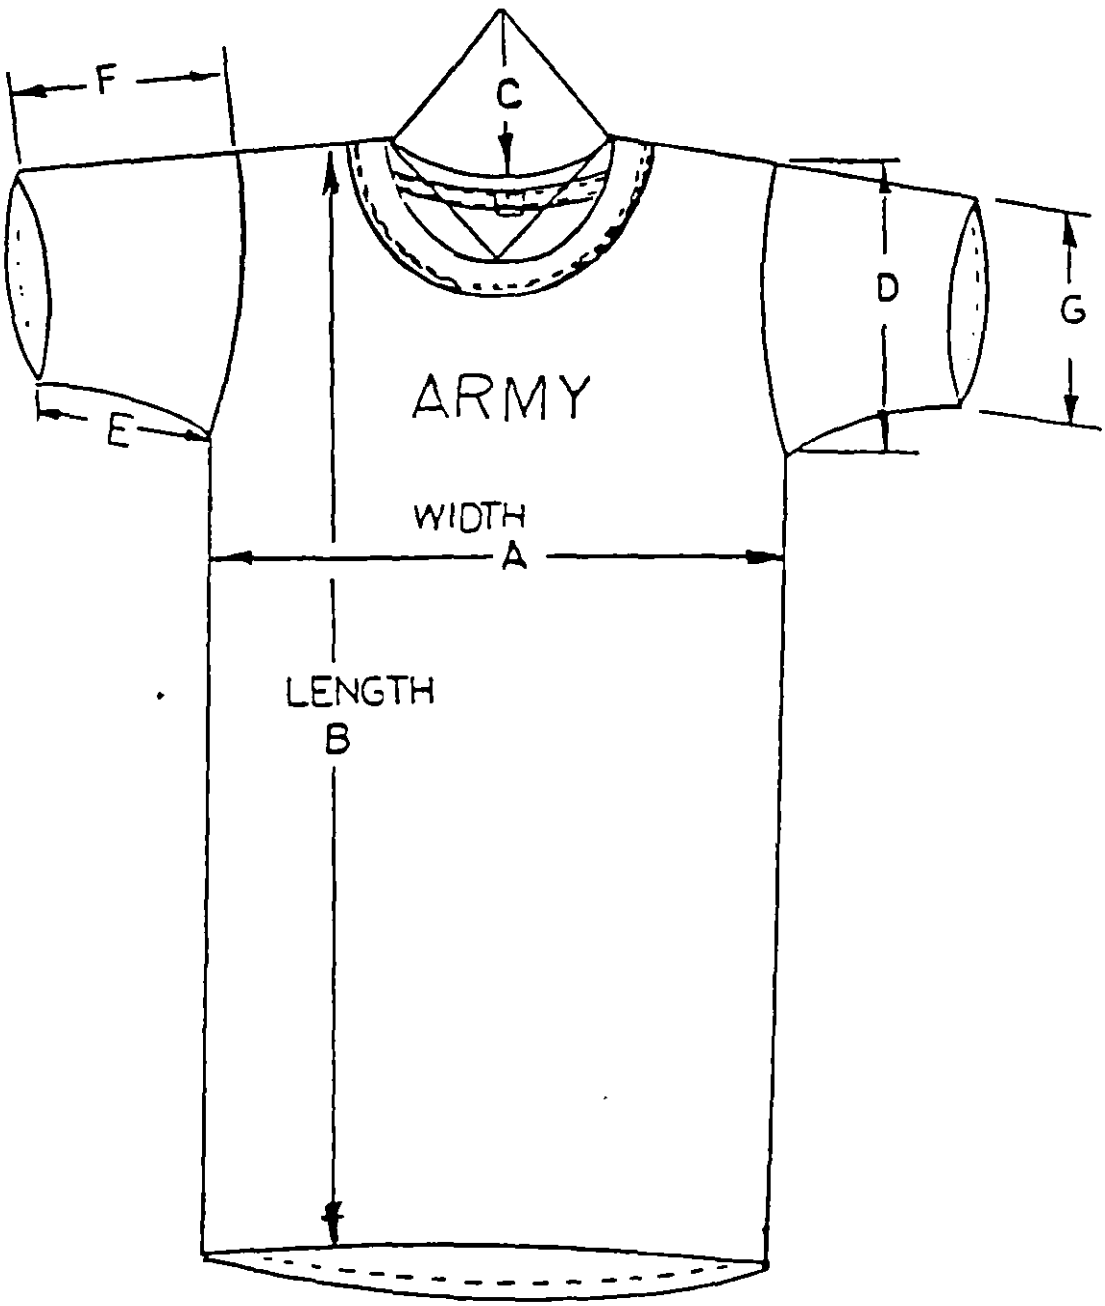


FIGURE 1
T-SHIRT
PHYSICAL FITNESS UNIFORM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

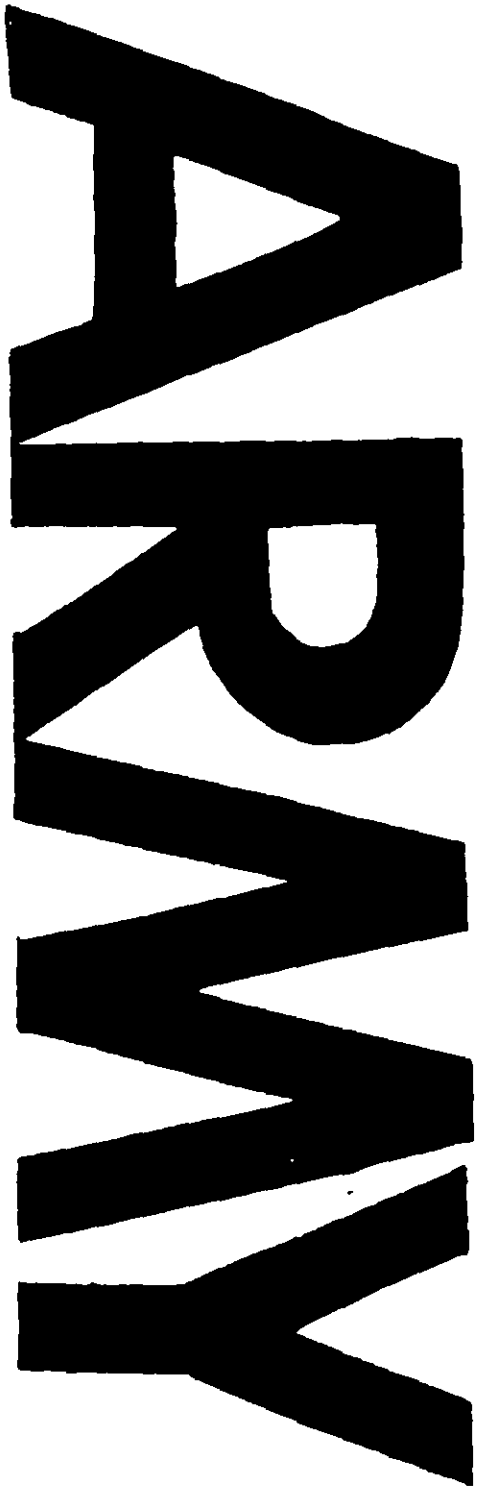


FIGURE 2.

The thickness of each letter shall be 5/8 (± 1/16 inch). The style of lettering shall be as shown above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55069	92-07-17

3. DOCUMENT TITLE

T-SHIRT, ATHLETE'S PHYSICAL FITNESS UNIFORM (PFU)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
DLA-CT	(215)-737-8105	(DSN)-444-8105
c. ADDRESS (Include Zip Code) Defense Personnel Support Center 2800 S. 20th Street (DPSC-FSBD/Bldg. 12-3-D) Philadelphia, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.