
FED. SUP CLASS
4730

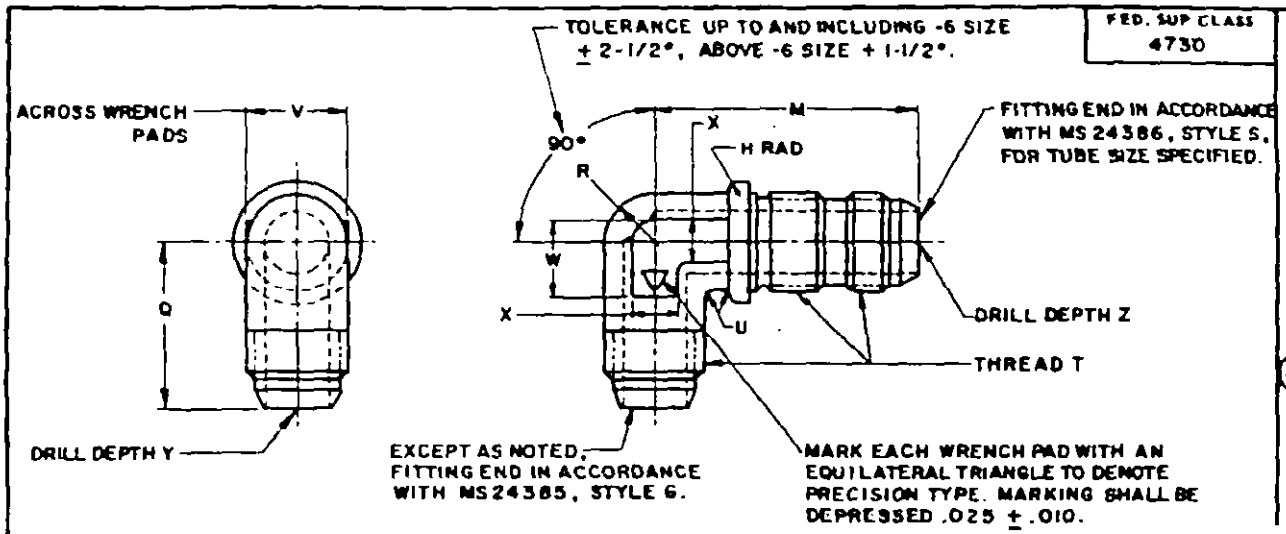

DASH NO.	TUBING OD	THREAD T (REF)	H RAD	M +3/64 -0	Q +3/64 -0	R RAD	U RAD	V
2	1/8	5/16-24UNJF-3A	1/32	1-13/32	53/64	5/32	1/16	5/16
3	3/16	3/8 -24UNJF-3A		1- 7/16	57/64	3/16		3/8
4	1/4	7/16-20UNJF-3A	1/16	1-37/64	61/64	7/32		7/16
5	5/16	1/2 -20UNJF-3A		1-39/64	1- 1/64	1/4		1/2
6	3/8	9/16-18UNJF-3A	3/32	1-51/64	1- 5/64	9/32	3/32	9/16
8	1/2	3/4 -16UNJF-3A		2- 3/32	1-11/32	3/8		3/4
10	5/8	7/8 -14UNJF-3A		2- 3/8	1-35/64	7/16	1/8	7/8
12	3/4	1-1/16-12UNJ -3A		2-21/32	1-49/64	17/32		1-1/16
16	1	1-5/16-12UNJ -3A		2-25/32	1-59/64	21/32		1-5/16
20	1-1/4	1-5/8 -12UNJ -3A		3- 7/64	2- 5/32	13/16	3/16	1-5/8
24	1-1/2	1-7/8 -12UNJ -3A		3-13/32	2-21/64	15/16		1-7/8
28	1-3/4	2-1/4 -12UNJ -3A		3-25/32	2-19/32	1- 1/8		2-1/4
32	2	2-1/2 -12UNJ -3A		4- 3/32	2- 7/8	1- 1/4		2-9/16

DASH NO.	W ±1/32	X ±1/32	T +3/64 -0	Z +3/64 -0
2	5/16	3/16	55/64	1- 7/16
3		1/4	59/64	1-15/32
4	3/8		63/64	1-39/64
5	1/2	5/16	1- 3/64	1-41/64
6			1- 7/64	1-53/64
8	5/8	7/16	1- 3/8	2- 1/8
10	3/4		1-41/64	2-15/32
12	7/8	1/2	1-55/64	2- 3/4
16	1-1/16	5/8	2- 1/64	2- 7/8
20	1-1/4	3/4	2- 9/32	3-15/64
24	1-7/16	7/8	2-31/64	3-39/64
28	1-3/4	1-1/16	2-25/32	4- 1/16
32	1-15/16	1-3/16	2-15/16	4-29/64

APPROVED 15 APR 57 REVISED (A) 6 MAR 58 (B) 5 SEP 62 (C) 10 FEB 67 (D) 16 JUN 78 (E) 22 MAR 79 (F) 16 APR 82 (G) 16 Nov 84

This Military Standard is approved for use by HQ AFLC CASO/LOOS, Federal Center, Battle Creek, MI 49016, Department of the Air Force and is available for use by all Departments and agencies of the Department of Defense.

Review activities: ARMY-ME, AV NAVY-AS DSC-CS

User activities:

P.A. AIR FORCE 82
Other Cust AIR FORCE-99

TITLE
ELBOW, TUBE, BULKHEAD, 90°, PRECISION TYPE

MILITARY STANDARD
MS 24394

PROCUREMENT SPECIFICATION MIL-F-8509

SUPERSEDES: ~~AN655~~

SHEET 1 OF 2

DD FORM 672-1 Limited Coordination

Project No: 4730-0680

Source: https://assist.dla.mil -- Downloaded: 2026-10-20 14:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL: STEEL; ALUMINUM ALLOY; CORROSION RESISTANT STEEL (CRES); TITANIUM ALLOY; BARS, SHAPES, OR FORGINGS (SEE PROCUREMENT SPECIFICATION).
FINISH: SEE PROCUREMENT SPECIFICATION.
NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.
ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J IN PLACE OF DASH FOR CRES, TYPE 304.
ADD K IN PLACE OF DASH FOR CRES, TYPE 316.
ADD S IN PLACE OF DASH FOR CRES, TYPE 347.
ADD T IN PLACE OF DASH FOR TITANIUM ALLOY.
EXAMPLE OF PART NUMBERS:

(6) MS24394-8 - ELBOW, 1/2 TUBING, STEEL.
MS24394D8 - ELBOW, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
MS24394J8 - ELBOW, 1/2 TUBING, CRES, TYPE 304.
MS24394K8 - ELBOW, 1/2 TUBING, CRES, TYPE 316.
MS24394S8 - ELBOW, 1/2 TUBING, CRES, TYPE 347.
MS24394T8 - ELBOW, 1/2 TUBING, TITANIUM ALLOY.
MS24394W8 - ELBOW, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005. ANGLES ±1/2°.
IN ADDITION TO THE SAMPLING REQUIREMENTS OF THE PROCUREMENT SPECIFICATION, THE SURFACE OF THE CORE ENDS ON 100% OF THE ELBOWS OF A LOT SHALL BE INSPECTED.
TITANIUM IS NOT RECOMMENDED IN OXYGEN SYSTEMS.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 13 MAR 57 REVISED (6) FOR CHANGES SEE SHEETS 2

Review activities: ARMY-ME, AV NAVY-AS DSC-CS
User activities:

This Military Standard is approved for use by HQ AFLC CASO/LOOS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

P.A. AIR FORCE 82 Other Cust AIR FORCE - 99	TITLE ELBOW, TUBE, BULKHEAD, 90° PRECISION TYPE	MILITARY STANDARD MS 24394
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: ~~AN833~~	SHEET 2 OF 2

DD FORM 672-1 Limited Coordination

Project No: 4730-0680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.