MIL-T-52803A(ME)
21 July 1980
SUPERSEDING
MIL-T-52803(ME)
31 May 1974

MILITARY SPECIFICATION

TABLE, BINDERY, PAPER

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a bindery table with a 3-position shelf.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
MMM-A-187	- Adhesive, Synthetic, Epoxy Resin Base Plate Form, General Purpose.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard,
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.

FSC 3610

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-P-17171	- Plastic, Laminate, Decorative, High Pressure.
MIL-T-22085	- Tape, Pressure-Sensitive Adhesive, Preservation and Sealing.

STANDARDS

FEDERAL

FED-STD-595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS35190	- Screw, Machine - 82° Flat Countersunk Head, Cross-Recessed, Carbon Steel, Cadmium Plated, UNC-2A (In./MM).
MS35492	- Screw, Wood, Flat Head, Cross-Recessed, Steel and Brass.
MS51988	- Nut, Self-Locking, Flanged-Prevailing-Torque, Steel, Cadmium, UNC and UNF, (In./MM).

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

B209	- Aluminum-Alloy Sheet and Plate.
B221	- Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes and Tubes.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

NATIONAL BUREAU OF STANDARDS (NBS)

CS 236 - Mat-Formed Wood Particleboard.
PS 1 - Softwood Plywood, Construction and Industrial.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Description. The table shall be as shown in figures 1, 2, and 3 and as specified herein.

3.2 Material. Material shall be as specified herein. Recycled or other materials may be used when approved by the contracting officer provided they meet all provisions of this specification (see 6.3).

3.2.1 Aluminum alloy sheet.

3.2.1.1 Gussets, footplates, and shelf. Gussets, footplates, and the shelf shall be aluminum alloy conforming to ASTM B 209 alloy 6061, temper T6.

3.2.1.2 Molding. The table molding shall be aluminum alloy conforming to ASTM B 209 alloy 6061, temper O.

3.2.2 Aluminum alloy angles. Aluminum alloy angle used for the facing attached to the bottom of the tabletop shall conform to ASTM B 221 alloy 6061, temper T6. Aluminum alloy angle used for the table legs shall conform to ASTM B 221 alloy 6063, temper T5.

3.2.3 Tabletop. At the contractor's option, material used in the tabletop shall be either softwood plywood conforming to PS 1, group 1, species in accordance with the contractor's commercial practice, veneer grade C, exterior type, or particleboard conforming to CS 236, type 2, density and class as specified (see 6.2).

3.2.4 Tabletop surface. The tabletop surface shall be plastic conforming to MIL-P-17171, type IV, color and pattern as specified (see 6.2), and shall be permanently cemented to the tabletop with a waterproof adhesive conforming to MMM-A-187.

3.2.5 Machine screws. Machine screws shall conforms to MS35190-292.

3.2.6 Wood screws. Steel wood screws shall conform to MS35492-903.

3.2.7 Nuts. Carbon or alloy steel nuts shall conform to MS51988-3 except that grade A shall be used in lieu of grade C steel.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

accordance with MIL-T-704, type A, except the finish coat which shall be type C and color No. 24525 in accordance with FED-STD-595.

3.6 Workmanship.

3.6.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of the material shall be done by methods that will not injure the material. Corners shall be square. All bends shall be made by methods that insure uniformity of size and shape. Precautions shall be taken to avoid overheating. External surfaces shall be free of burrs, sharp edges and corners. Unless otherwise specified (see 6.2), the welding process shall be at the option of the contractor.

3.6.2 Bolted connections. Boltholes shall be accurately formed and shall have burrs removed. Washers or lockwashers shall be provided where necessary. All fasteners shall have full thread engagement.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Lot. A lot shall consist of all tables offered for delivery at one time.

4.3.2 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105, inspection level III.

4.3.3 Examination.

4.3.3.1 Samples. Samples selected in accordance with 4.3.1. shall be examined for the defects specified in 4.4.1 AQL shall be 1.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.4 Inspection procedure.

4.4.1 Examination. The table shall be examined as specified herein for the following defects:

Major

101. Any part or component not in accordance with figures 1,2, or 3.
102. Material not as specified.
103. Construction not as specified.
104. Workmanship not as specified.

Minor

201. Identification marking not as specified, incomplete, missing, or illegible.
202. Treatment and painting not as specified.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

105.	Materials, methods, and containers not as specified. Each incorrect material, method, or container shall be considered one defect.
106.	Disassembly not as specified for level A.
107.	Tabletop not protected as specified for level A.
108.	Table not preserved and packed in accordance with the referenced document for commercial.
109.	Blocking, bracing, and cushioning not as specified for level A or B.
110.	Closure and strapping of shipping containers not as specified for level A or B.
111.	Marking missing, illegible, incorrect or incomplete for level A, level B or commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly. The table shall be disassembled to the maximum practicable extent in order to effect a reduction in cubage and to protect those parts vulnerable to damage.

5.1.1.2 Fasteners. Any removed fasteners shall be preserved in accordance with MIL-P-116, method IC-1 or IC-3.

5.1.1.3 Tabletop. The tabletop shall be completely covered with 1.5-mil or thicker polyethylene film comforming to L-P-378. The covering shall be taped to the underside of the top with tape conforming to MIL-T-22085, type II.

5.1.2 Commercial. The table shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, level B, or Commercial as specified (see 6.2).

5.2.1 Level A. The tables, preserved as specified in 5.1, shall be packed in boxes conforming to PPP-B-601, overseas type, style optional, or PPP-B-621, class 2, style optional. Blocking, bracing, and cushioning of the tables to prevent movement or damage shall be in accordance with MIL-STD-1186. Closure and strapping shall be in accordance with the appendix of the applicable box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. The tables, preserved as specified in 5.1, shall be packed as specified in 5.2.1 for level A except the boxes shall be Domestic type or class as applicable, or in boxes conforming to PPP-B-636, V2s, V11c, or V13c, or PPP-B-640, class 2. Fiberboard boxes shall be waterproof sealed with tape in accordance with the appendix of the applicable box specification.

5.2.3 Commercial. Tables shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military. Marking for military levels of protection shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking for commercial packaging shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The table is intended for installation in motorized topographic support sections to hold paper for processing.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Density and class of particleboard required when particleboard is used (see 3.2.3).
(c) Color and pattern required (see 3.2.4)
(d) When the welding process will not be at the option of the contractor (see 3.6.1).
(e) Degree of preservation and degree of packing required (see 5.1 and 5.2).

6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification.


Custodian:
Army - ME

Preparing activity:
Army - ME

Project 3610-A311

Review activity:
DLA - GS

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

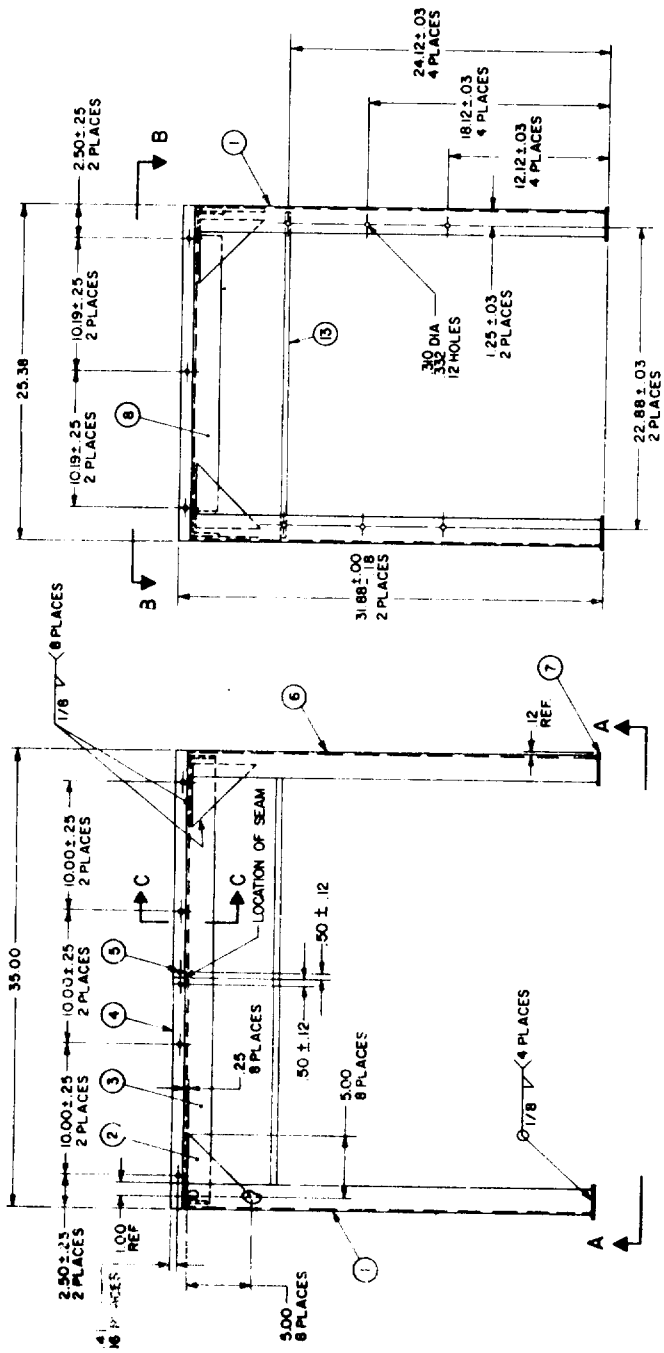

LIST OF MATERIALS

FIND NO.	QTY	NOMENCLATURE OR DESCRIPTION	MATERIALS
1	2	ANGLE, 2X2X.125X31 LONG	ALUMINUM 6063 ANGLE
2	8	GUSSET, 6X6X.125	ALUMINUM 6061 SHEET
3	2	ANGLE, 2X2X.125X31 LONG APPROX	ALUMINUM 6061 ANGLE
4	1	HOOK, DWG. 127 LONG APPROX X.062 THICK	ALUMINUM 6061 SHEET
5	16	SCREW, WOOD, FLAT HD., CROSS-RECESSED NO. 2-26X.50 LONG	CARBON STEEL, CD OR ZN. PLTD.
6	2	ANGLE, 2X2X.125X31 LONG	ALUMINUM 6063 ANGLE
7	4	FOOT PLATE, .125 THICK	ALUMINUM 6061 SHEET
8	2	ANGLE, 2X2X.125X25.375 LONG APPROX	ALUMINUM 6061 ANGLE
9	14	SCREW, MACH. FLAT CTSK. HD., CROSS-RECESSED .25-20X1.25 LONG, UNC-2A	CARBON STEEL, CD. PLTD.
10	14	NUT, SELF-LOCKING-FLANGED, PREVAILING TORQUE 25-20, UNC	CARBON STEEL, CD. PLTD.
11	1	TABLE TOP COVERING, 25.375X35 APPROX	PLASTIC SHEET
12	1	TABLE TOP, 25.375X35X.75 APPROX.	PLYWOOD OR PARTICLEBOARD
13	1	SHELF NO. 14 GA.	ALUMINUM 6061 SHEET

FIGURE 1. Table, bindery, paper.

X-2714

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

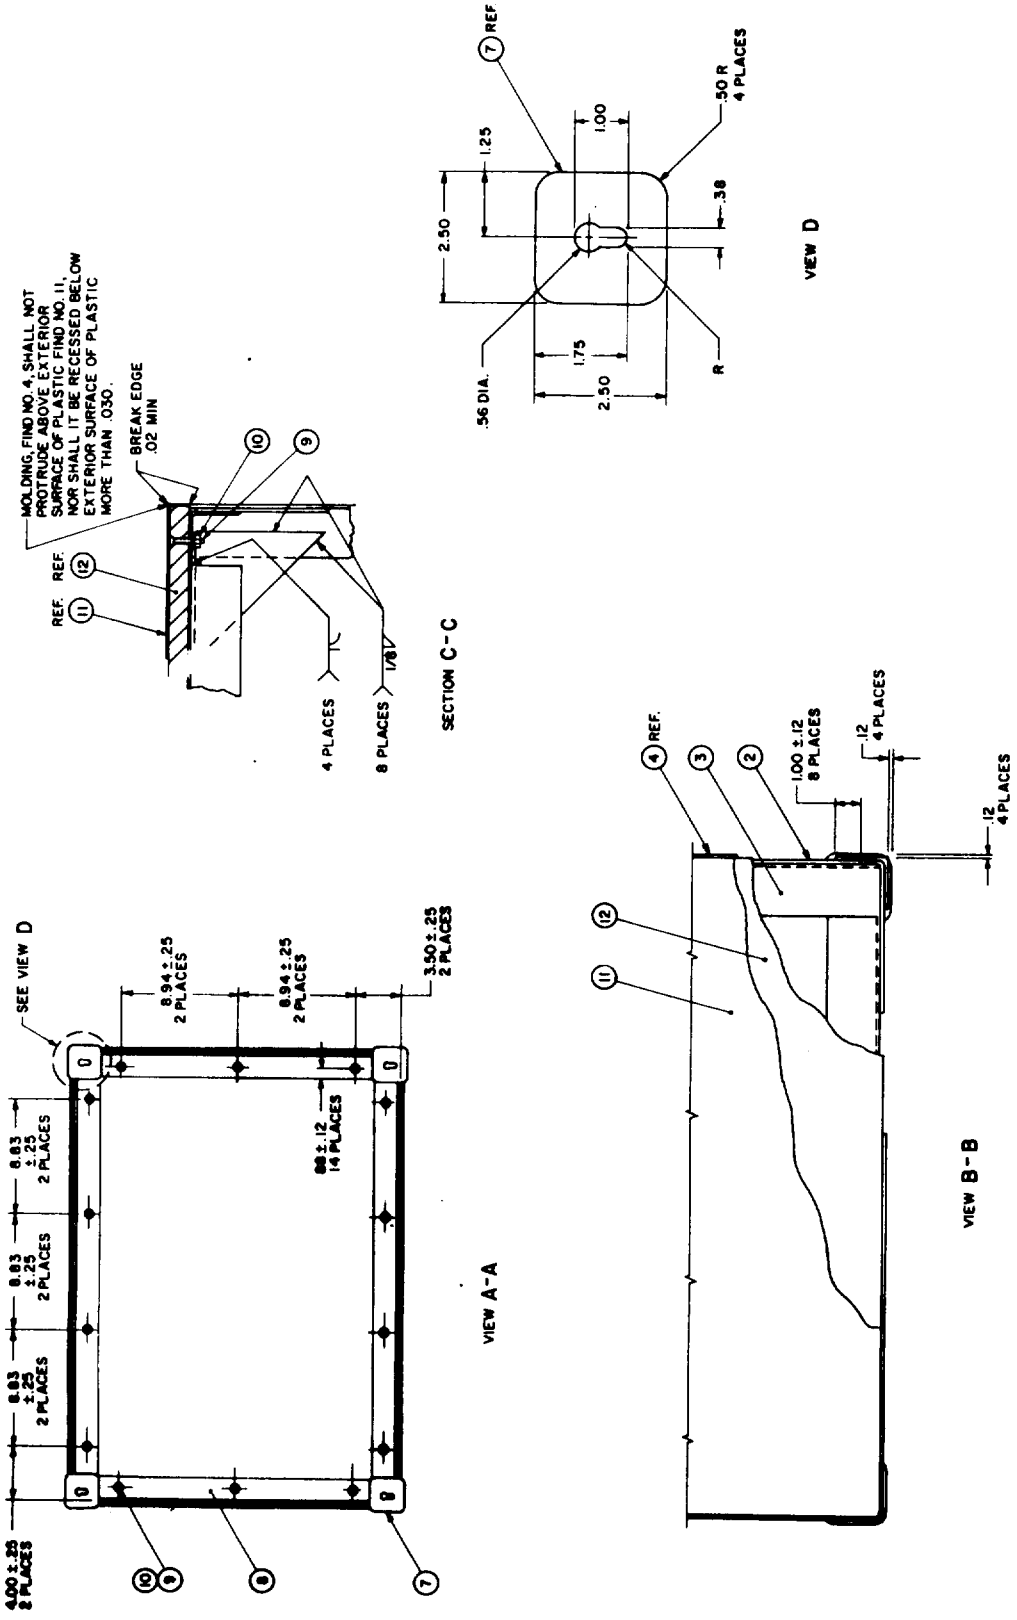


FIGURE 2. Table, bindery, paper: details.

X-2715

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

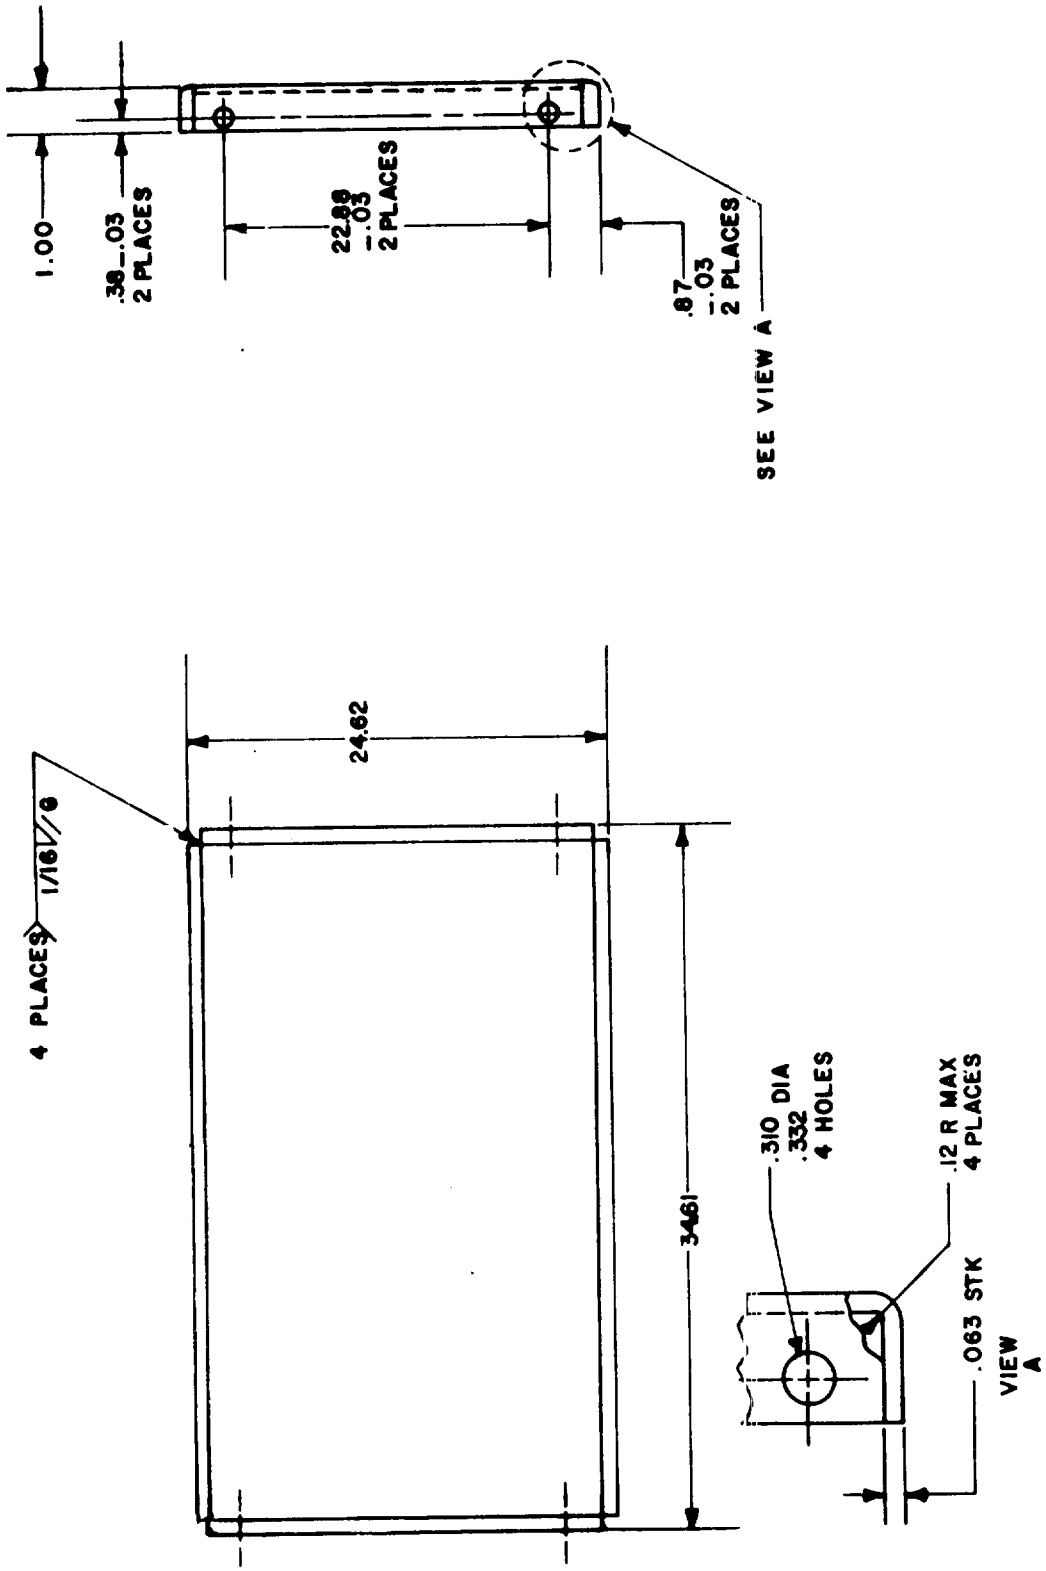


FIGURE 3. Table, bindery, paper: shelf.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-52803A(ME) Table, Bindery, Paper

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.