MILITARY SPECIFICATION

CHEST, PACKING, DEMOLITION PLATOON, ENGINEER

This specification is approved for use by all Departments and Agencies for the Department of Defense.

1. SCOPE

1.1 This specification covers the construction of one type of plywood chest designated as Chest, Demolition Platoon, Engineer.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-530 - Plywood, Flat Panel
TT-E-529 - Enamel, Alkyd, Semi-Gloss

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105)
MIL-STD-1168 - Lot Numbering of Ammunition

FSC: 1375

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

DRAWINGS

U.S. ARMY PICATINNY ARSENAL

8864491 - Chest, Packing, Demolition Platoon, Engineer

PUBLICATIONS

P8864491 - Packaging data sheet

(Copies of specifications, standards drawing and publications required by contractors in connection with specific procurement functions hould be obtained from the procuring activity or as directed by the Contracting Officer).

3. REQUIREMENTS

3.1 Material. - Materials shall be in accordance with applicable drawings and specifications.

3.2 Plywood. - The plywood shall conform to Specification NN-P-530, Douglas fir or hardwood.

3.3 Fasteners and hardware. - All fasteners and hardware shall be standard commercial items, size and material as shown on figures 1 through 16.

3.4 Chest. - The chests shall comply with all requirements specified on drawing (dwg.) 8864491 and with all requirements specified in applicable specifications.

3.5 Workmanship. - The parts and assemblies shall be fabricated and assembled in a thorough workmanlike manner in accordance with good commercial practice for the type of equipment. All required markings shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply, and are hereby made a part of this detail specification.

4.2 Classification of inspection. - The following types of inspection shall be conducted on this item:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

a. First article inspection
b. Quality conformance inspection

4.3 First article inspection

4.3.1 Submission . - The contractor shall submit a first article sample (see 6.1b) as designated by the Contracting Officer. The first article sample shall consist of two (2) complete chests. The first article shall be evaluated in accordance with the provisions of 4.3.2 and 4.3.3.

4.3.2 Inspections to be performed. - See MIL-A-48078 and paragraphs 4.4.2 and 4.4.3 and Table I specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

TABLE I

FIRST ARTICLE INSPECTION MIL-C-48744 (PA)

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	Chest, Packing Demolition Platoon, Engineer				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Chests, (Complete Item) Dwg. 8864491	2		3.4	4.4.2.1

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

4.3.3 Rejection. - See MIL-A-48078

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. - Inspection lots shall comply with the lot formation provisions of MIL-A-48078. Lot numbering as required shall be in accordance with MIL-STD-1168.

4.4.2 Examination.- See MIL-A-48078. Unless otherwise specified in the Classification of Defects, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.1	Assembly				8864491
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major B:					
131.	Inside height		0.40%	3.4	Gage
132.	Inside length		0.40%	3.4	Gage
133.	Inside width		0.40%	3.4	Gage
134.	Location of partitions		0.40%	3.4	Gage
135.	Nail protruding inside of chest		0.40%	3.4	Visual
136.	Nails not clinched		0.40%	3.4	Visual
137.	Loading plan (label) omitted or not as specified		0.40%	3.4	Visual
138.	Exterior and interior color not as specified		0.40%	3.4	Visual
Minor:					
201.	Partitions improperly assembled		0.65%	3.4	Visual
202.	Partitions of incorrect pattern		0.65%	3.4	Visual
203.	Nail protruding outside of box		0.65%	3.4	Visual
204.	Hardware missing, not properly located or of wrong pattern		0.65%	3.4	Visual
205.	Screw, rivet or nail missing		0.65%	3.4	Visual
206.	Incorrect seating or operation of top		0.65%	3.4	Visual
207.	Loose rivet		0.65%	3.4	Visual/Manual
208.	Loose screw or screw not properly seated		0.65%	3.4	Visual/Manual
209.	Hardware insecure		0.65%	3.4	Manual
210.	Protective finish damaged		0.65%	3.4	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-C-48744 (PA)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.1	Assembly (continued)				8864491
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor:					
211.	Loading plan improperly positioned		0.65%	3.4	Visual
212.	Framing strips improperly positioned		0.65%	3.4	Visual
213.	Evidence of poor workmanship		0 .65%	3.5	Visual

NOTES:

7

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

There are no tests applicable to this specification.

4.4.4 Inspection equipment. - The inspection equipment required to perform the examinations prescribed herein is described in the 'Paragraph Reference/Inspection Method' column in the tables starting with paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and Section 6.2 herein.

4.5 Test methods and procedures. - Not applicable

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation, packaging and packing shall be in accordance with Packing Data Sheet No. P8864491.

5.2 Marking. - Marking shall be in accordance with Packaging Data Sheet No. P8864491.

6. NOTES

6.1 Ordering Data. - Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Provisions for submission of first article samples.
c. Provisions of MIL-A-48078.

6.2 Submission of inspection equipment designs for approval. - (See MIL-A-48078). Submit equipment designs as required, to Commander: Picatinny Arsenal, ATTN: SARPA-QA-T Dover, New Jersey 07801.

6.3 Distribution of ammunition data cards. - Distribution of data cards shall include the following: Commander, Picatinny Arsenal, ATTN: SARPA-QA-A-M, Dover New Jersey 07801.

Custodian:
Army-PA

Preparing Activity:
Army-PA


Project Number 1975-A-122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.



FIGURE 1. *Method of joining plywood.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

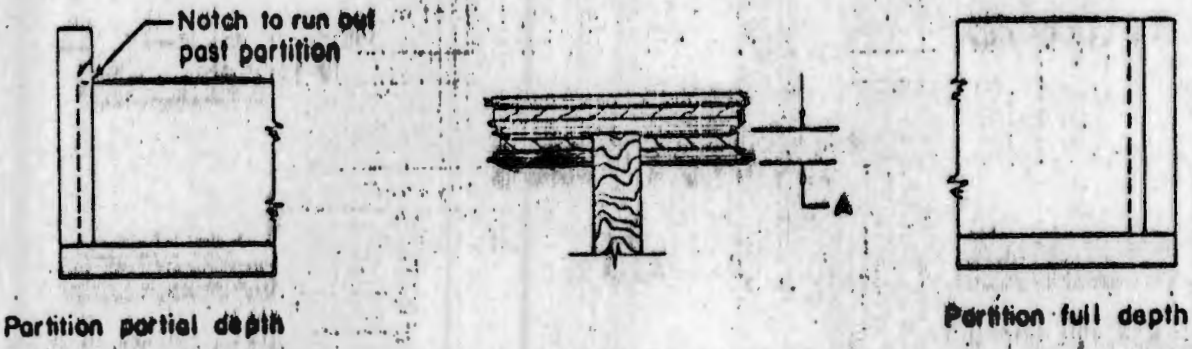

Plywood	A-Depth of notch
3/8"	1/8"
1/2"	1/8"
5/8"	3/16"
3/4"	3/16"

FIGURE 2. Method of joining partition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

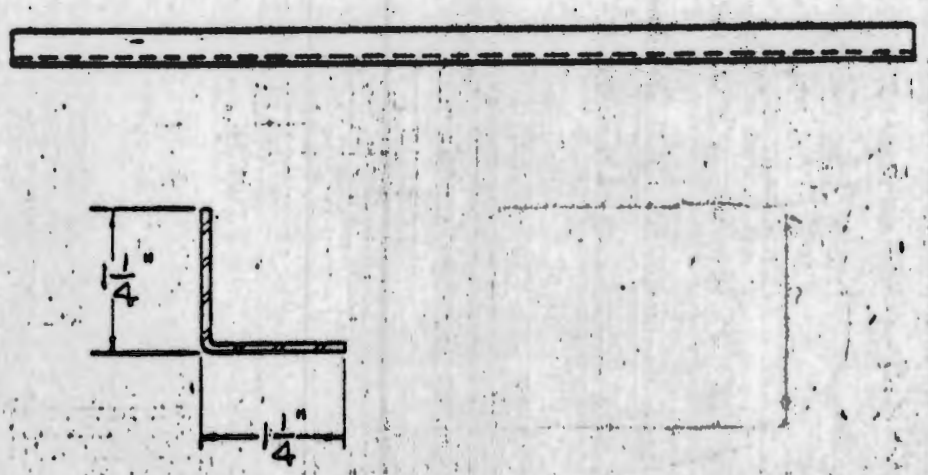


FIGURE 3 *Bottom binding angle. Sheet steel.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

MIL-C-48744 (PA)

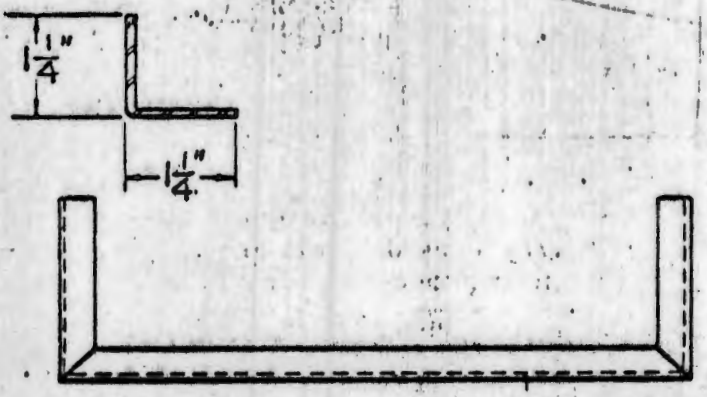


FIGURE 4. *End binding angle. Sheet steel.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.


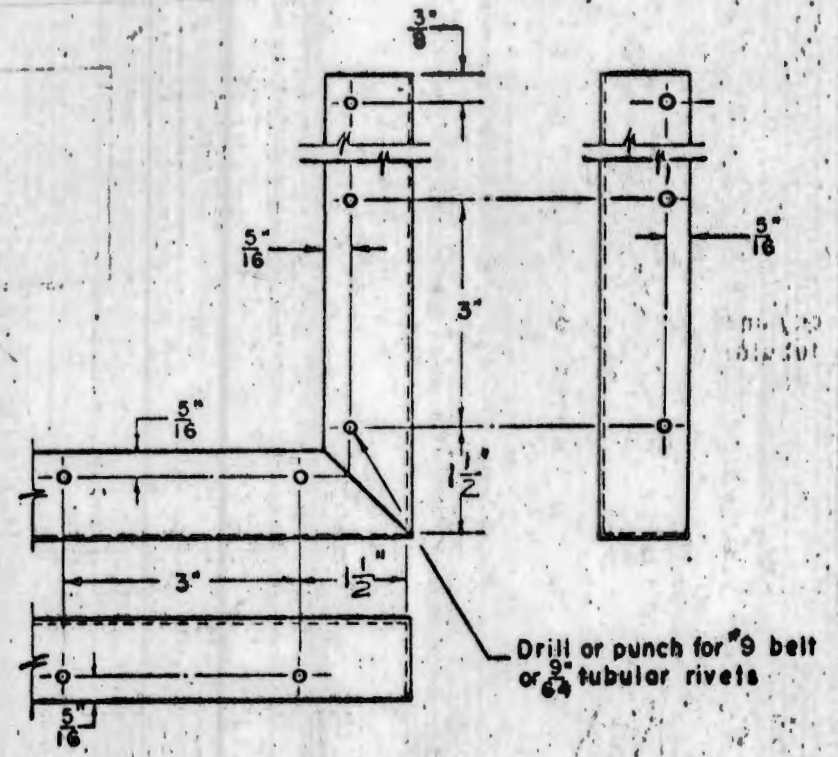


FIGURE 5. *Binding angle corner. Drill or punch detail.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

MIL-C-487K4(PA)

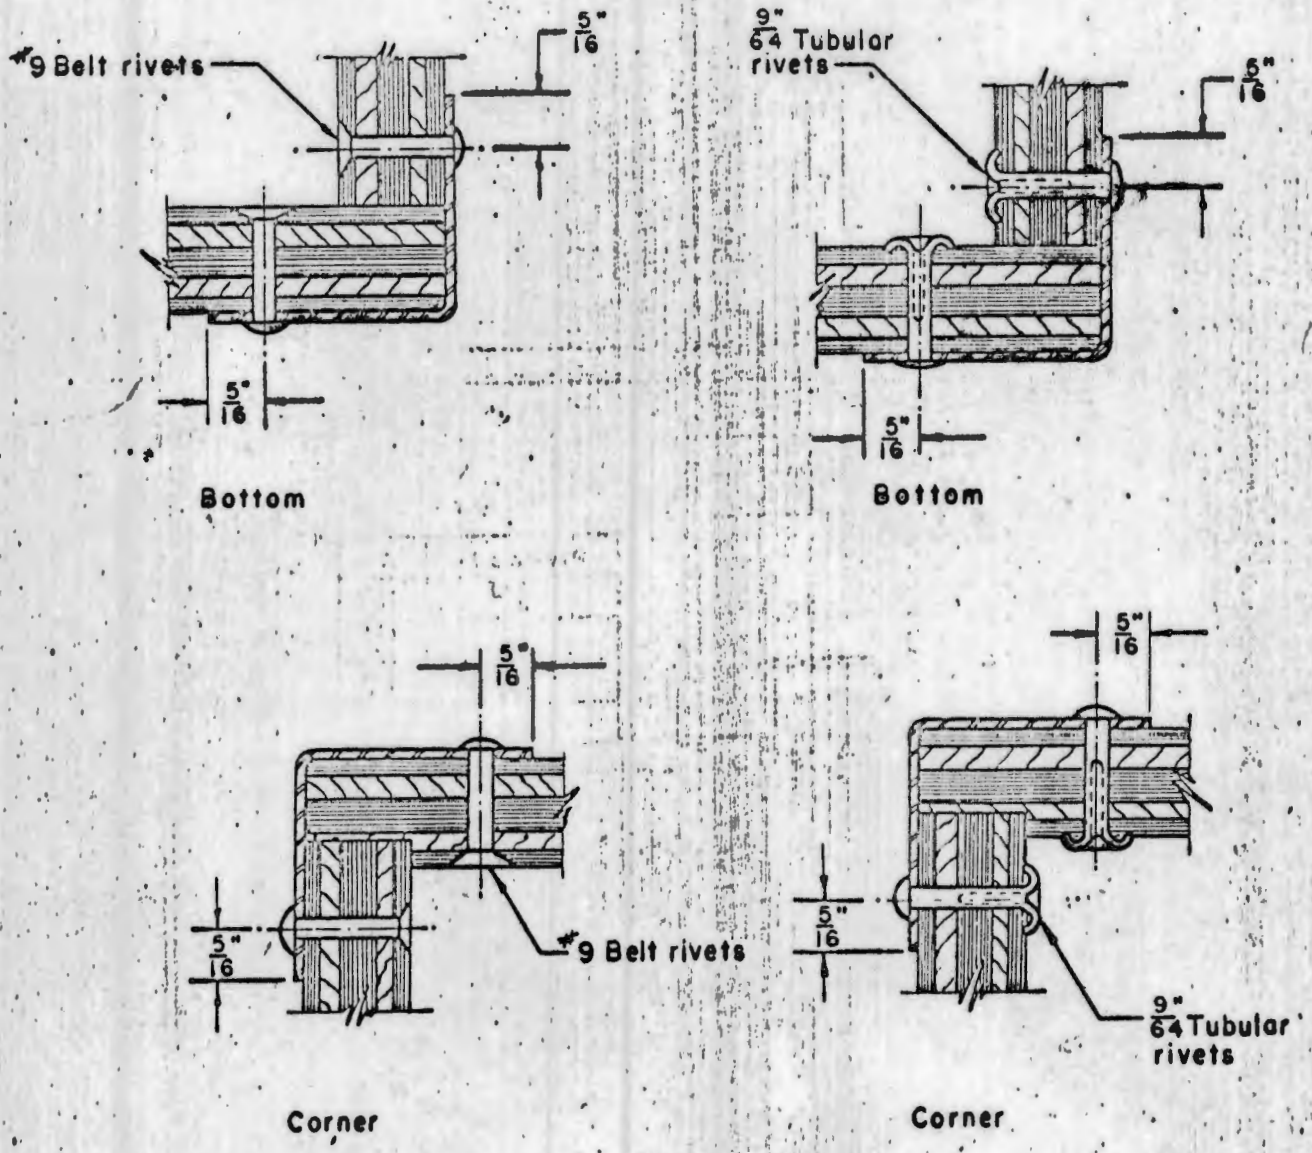


Either type of riveting may be used.
Rivets spaced approx. 3" apart.

FIGURE 6 *Method of joining end and bottom binding angle to plywood.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.


MIL-C-48744 (MA)

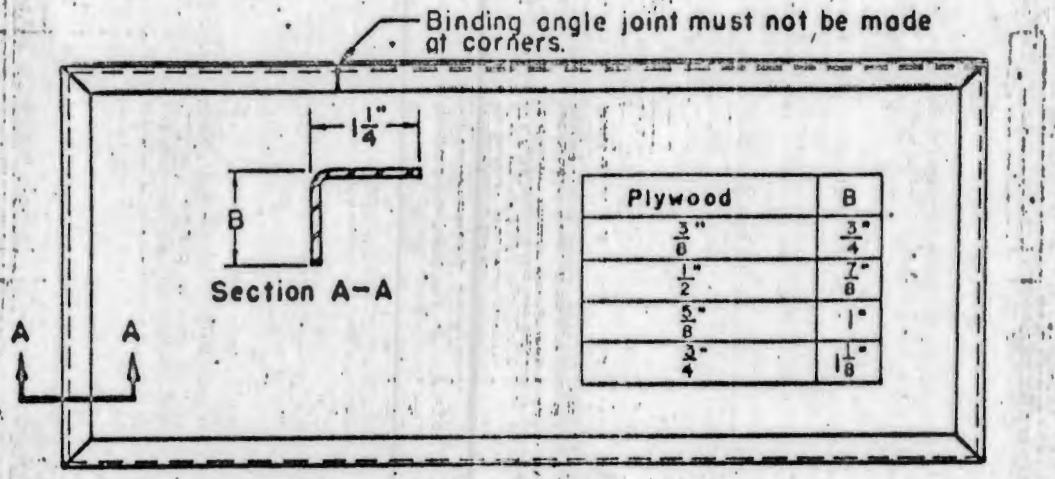

Plywood	B
3/8"	3/4"
1/2"	7/8"
5/8"	1"
3/4"	1 1/8"

FIGURE 7. *Cover binding angle. Sheet steel.*


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

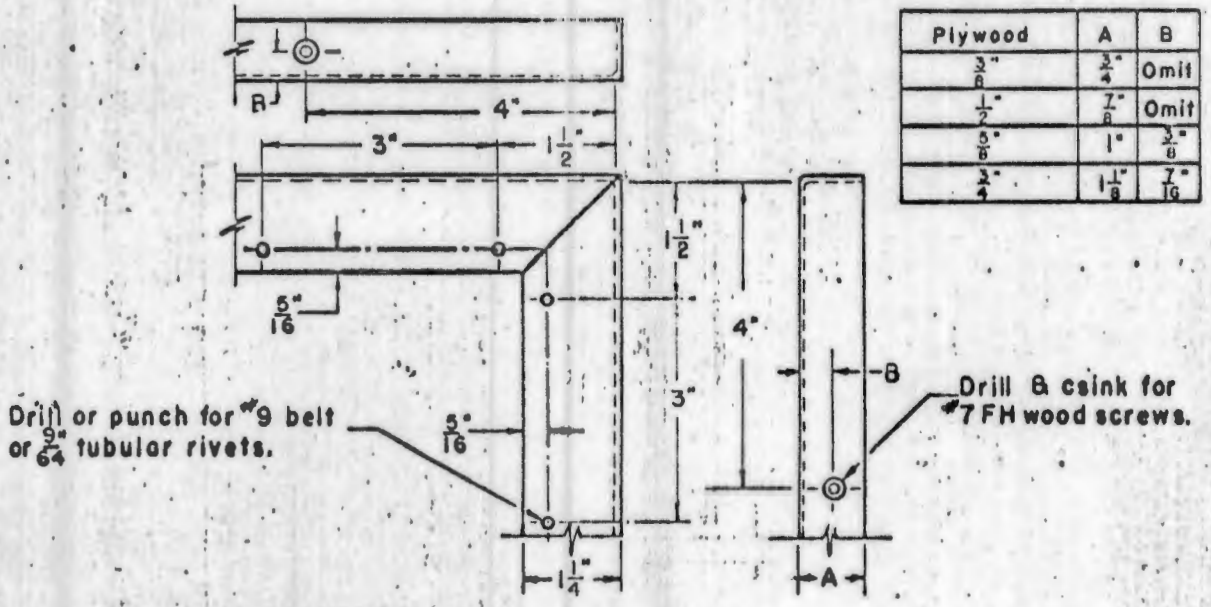

Plywood	A	B
3/8"	3/4"	Omit
1/2"	7/8"	Omit
5/8"	1"	3/8"
3/4"	1 1/8"	7/16"

FIGURE 8 *Cover corner binding. Drill or punch detail.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

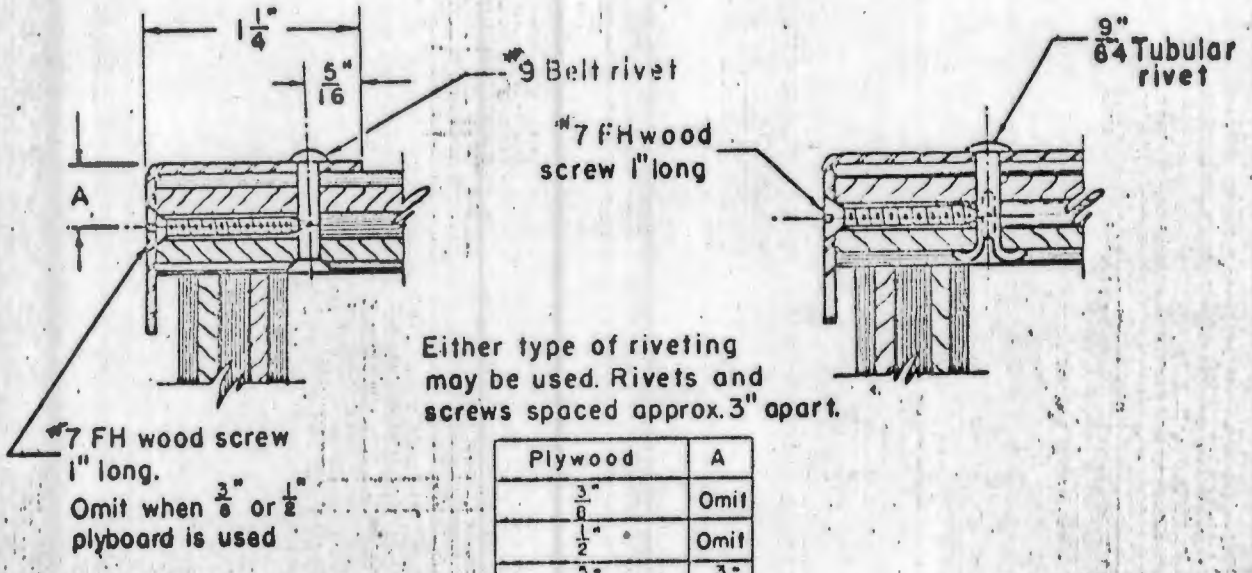



Plywood	A
3/8"	Omit
1/2"	Omit
5/8"	3/8"
3/4"	7/16"

FIGURE 9 *Method of joining cover binding to plywood.*


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

MIL-C-4874K(PA)

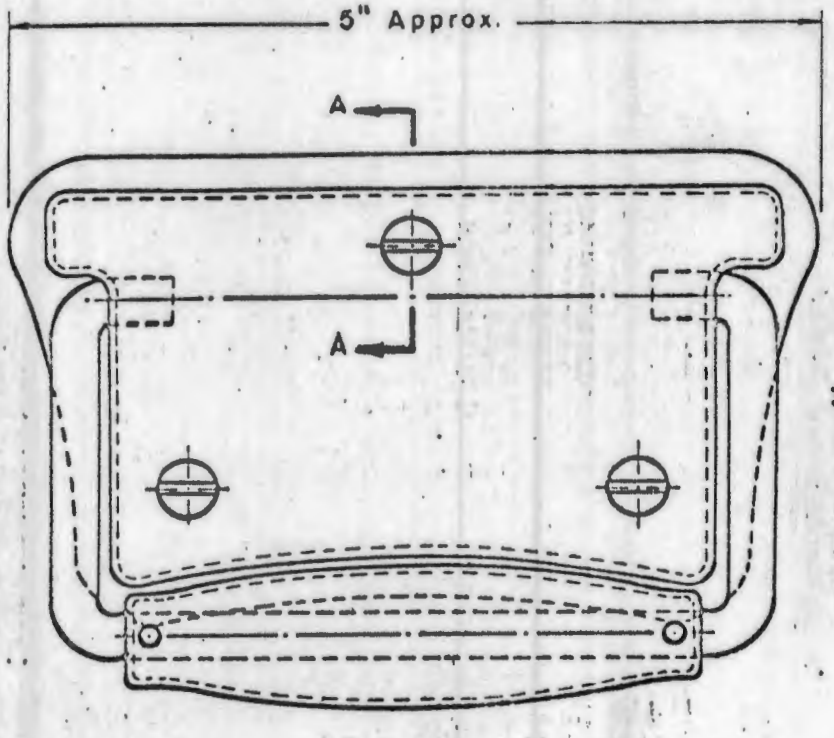

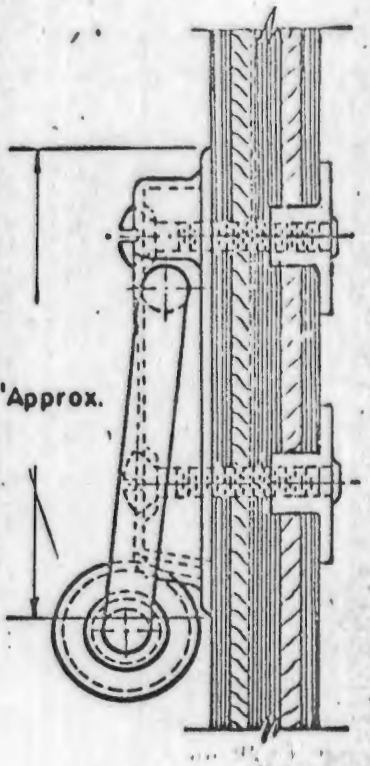

Note Commercial handle of approx. size & shape as shown.

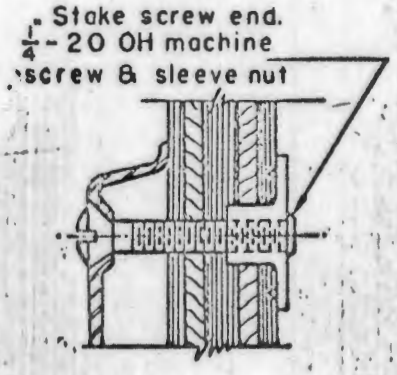

Section A-A

FIGURE 10 *Handle, Steel (commercial).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

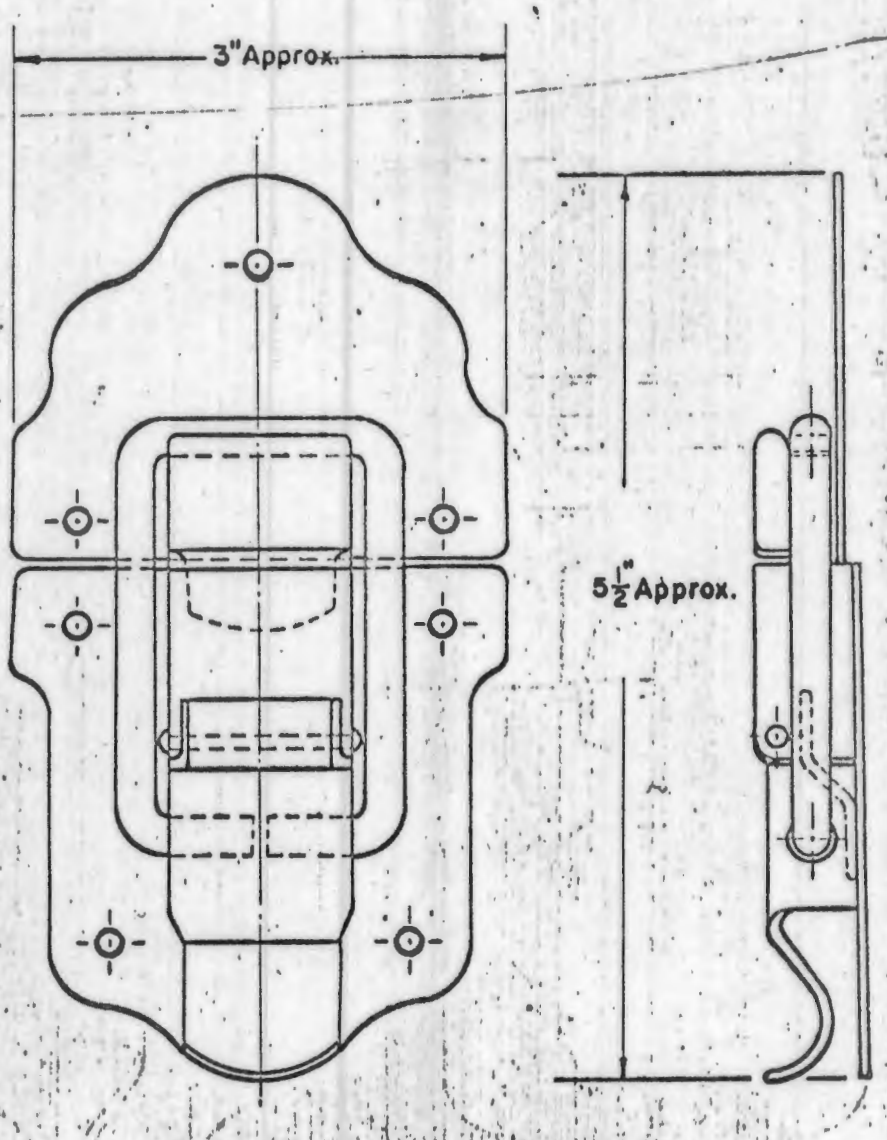


FIGURE 11. *Single dowel drawbolt. Steel (commercial).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

Plywood	A
3/8"	3/4"
1/2"	7/8"
5/8"	1"
3/4"	1 1/8"


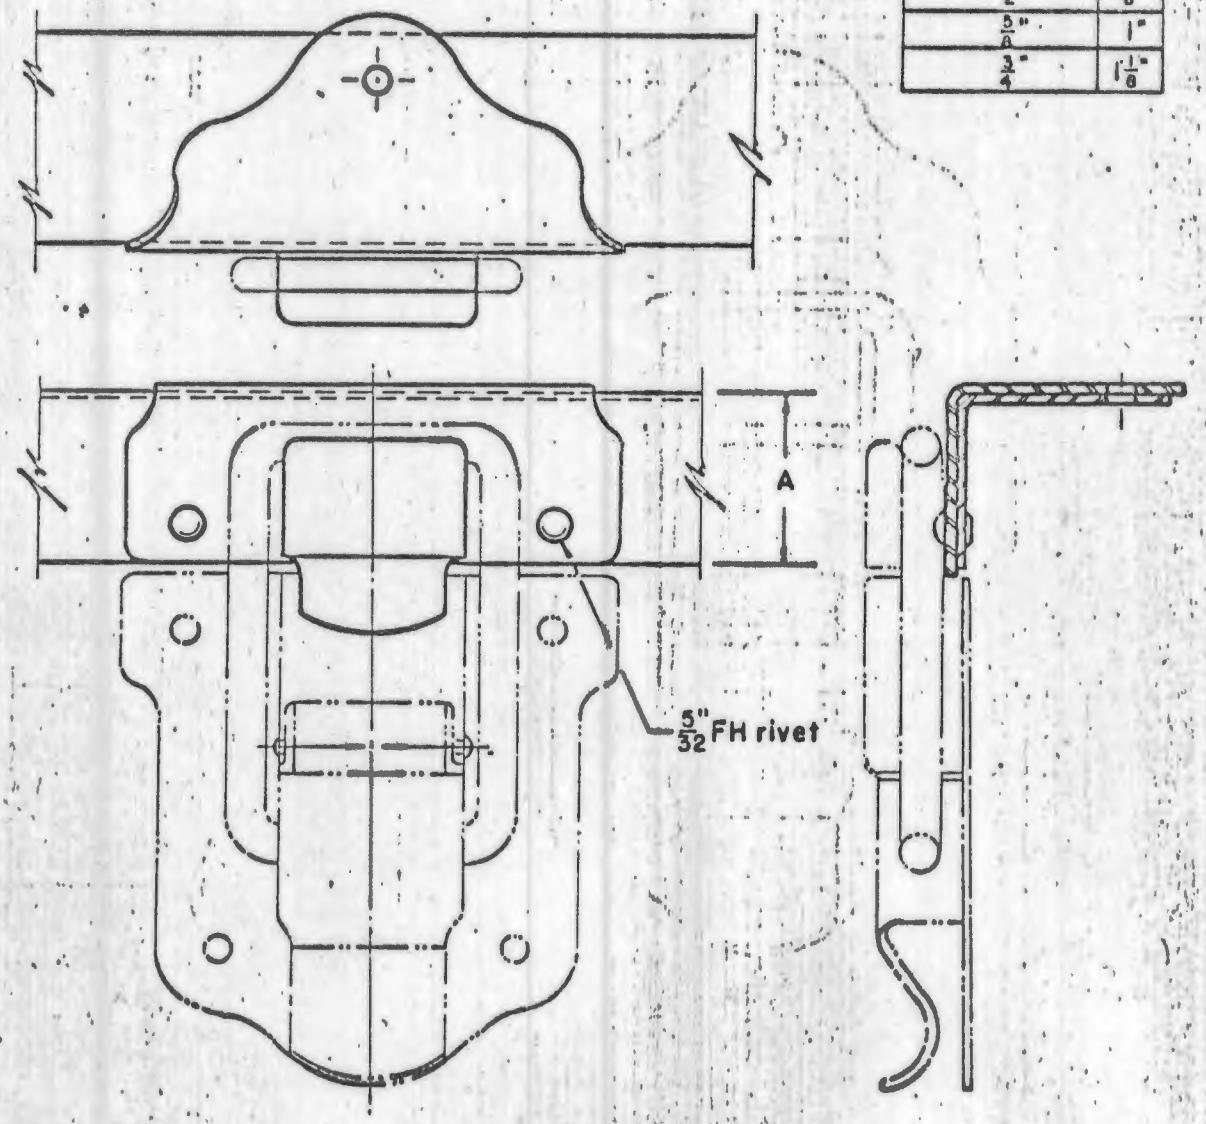


FIGURE 12 *Method of joining drawbolt to cover binding angle.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

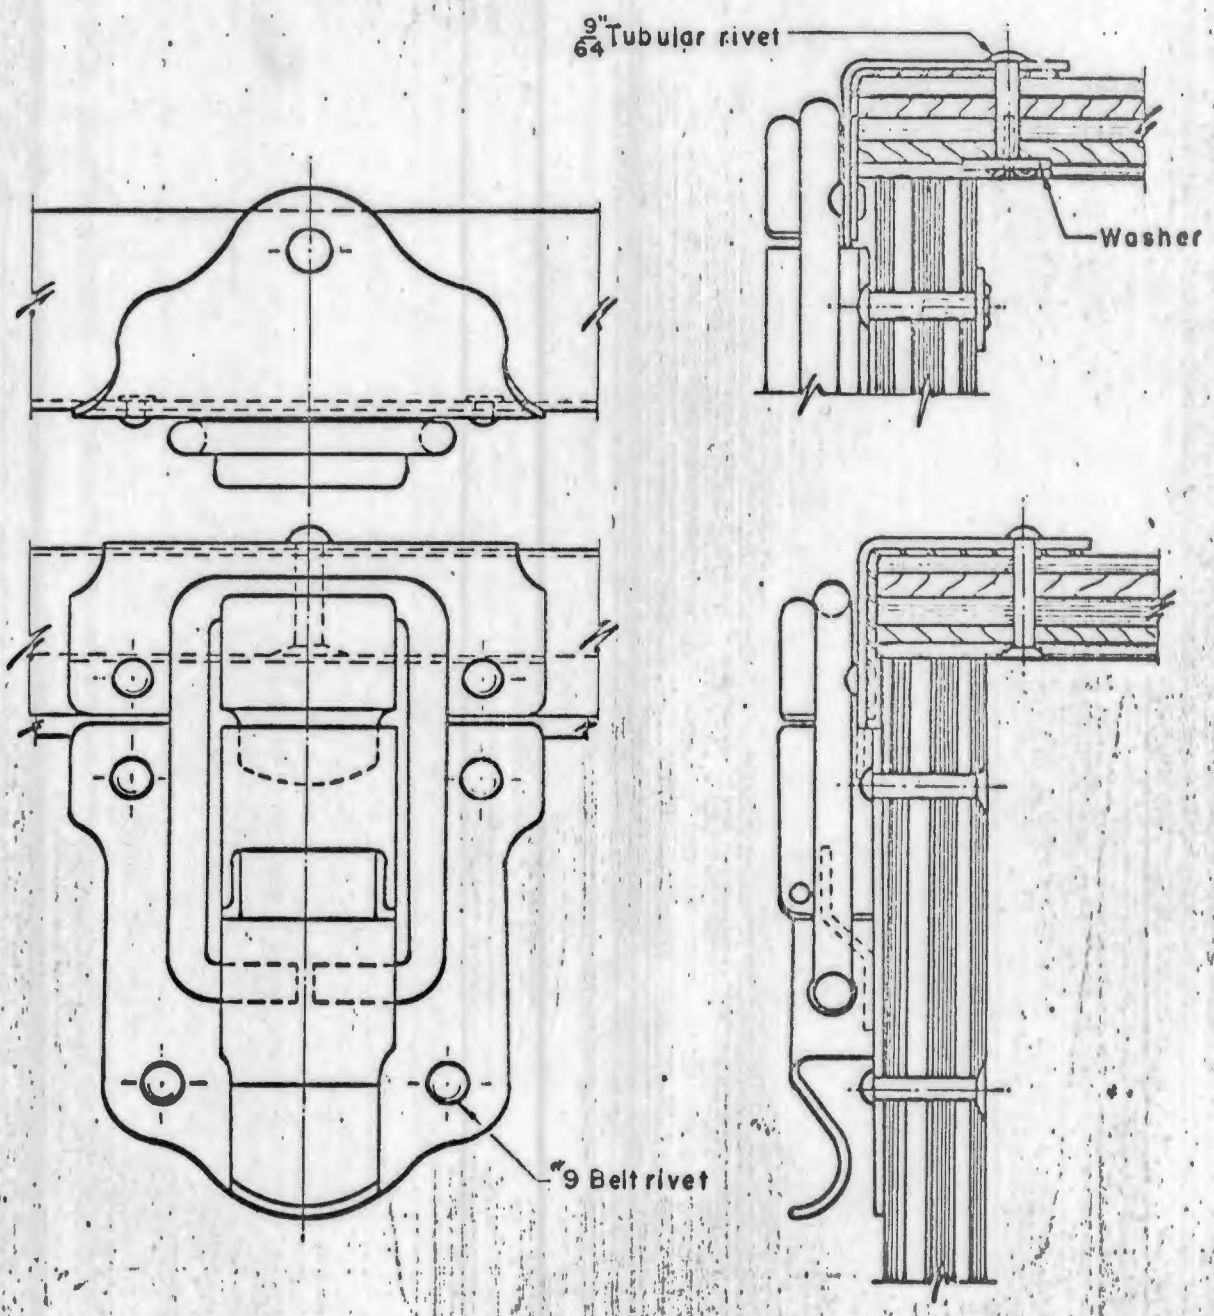

Either type of riveting may be used.

FIGURE 13. *Method of joining drawbolt to plywood.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.


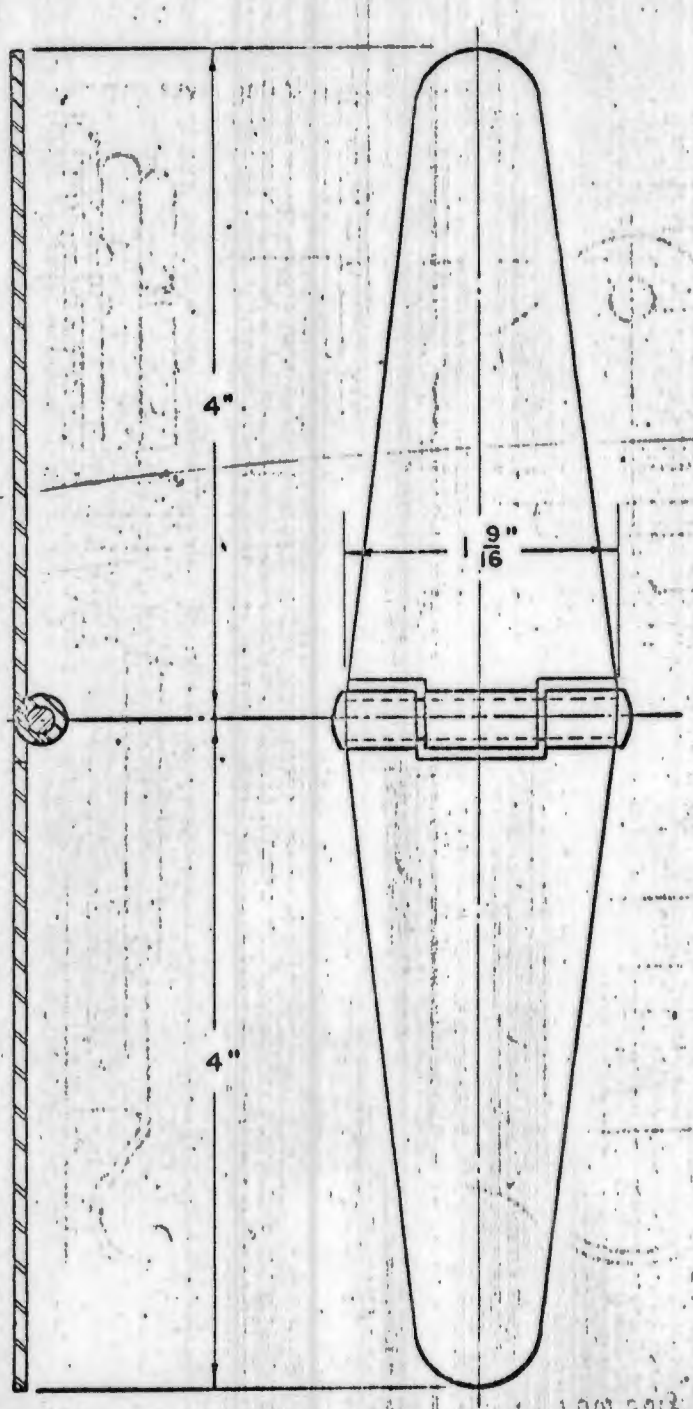


FIGURE 14 *Hinge. Steel (commercial).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

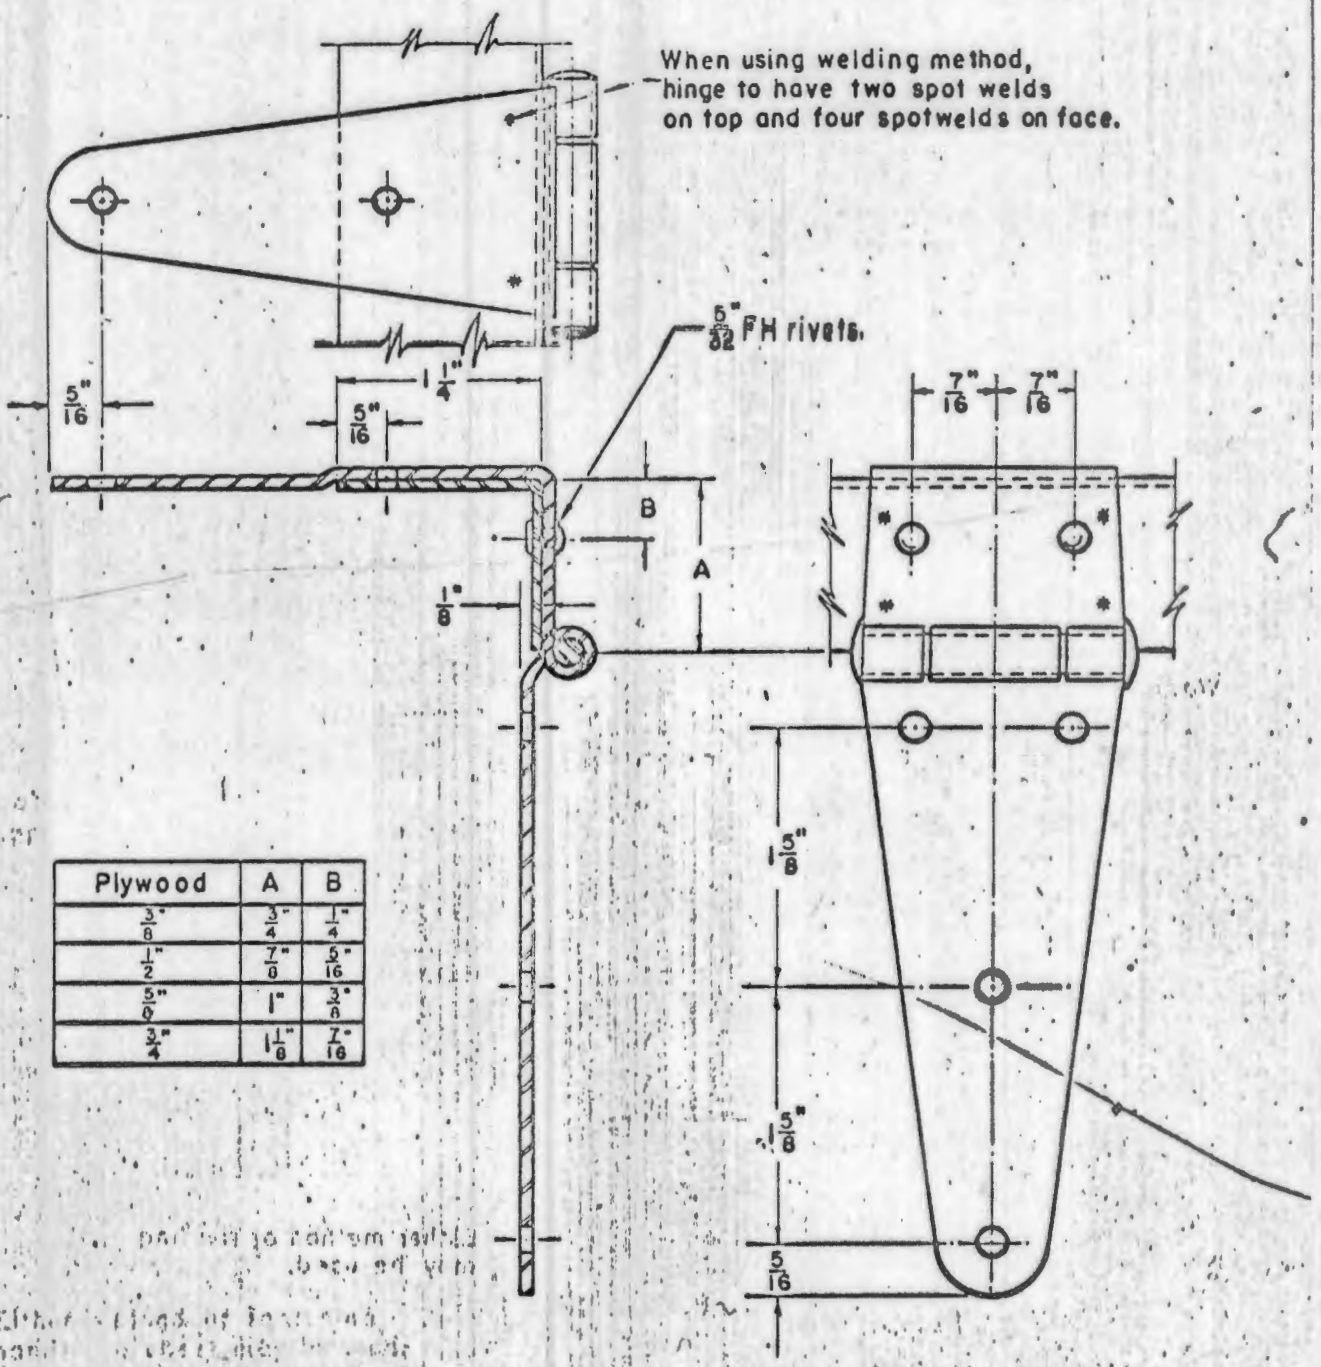

Plywood	A	B
3/8"	3/4"	1/4"
1/2"	7/8"	5/16"
5/8"	1"	3/8"
3/4"	1 1/8"	7/16"

FIGURE 2.5 *Method of joining hinge to cover binding angle.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

MIL-C-48744 (PA)

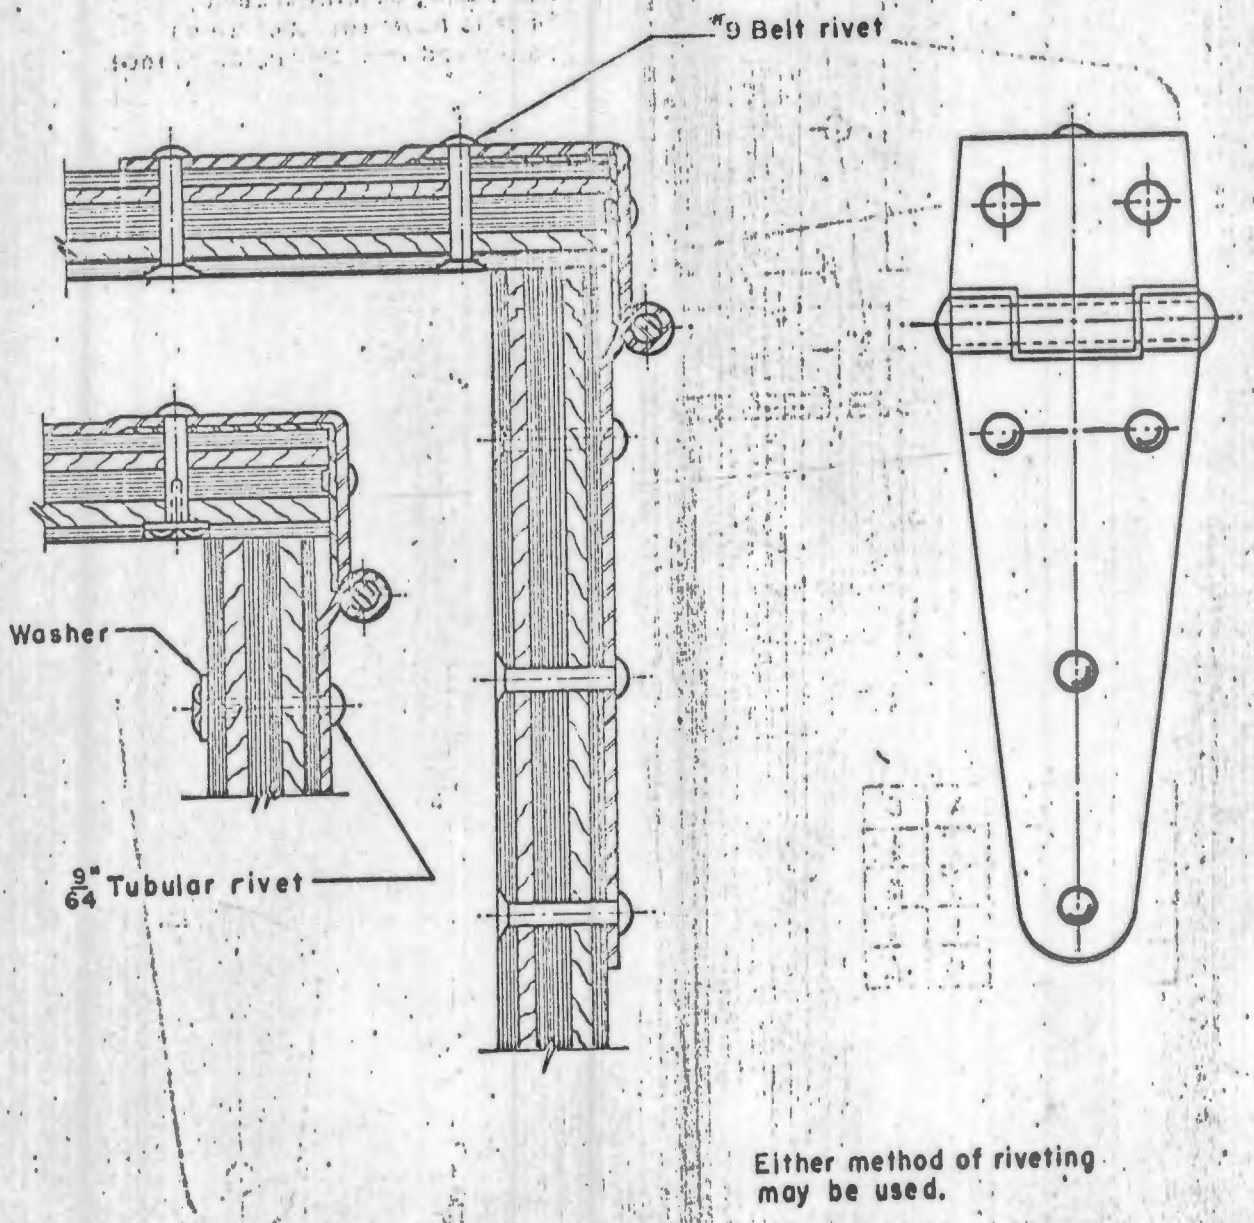


FIGURE 16 *Method of joining hinge to plywood.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

MIL-C-48744 (PA)

FEDERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
CHEST, DEMOLITION, PLATOON ENGINEER M1931	8864491	1375-212-4600
COMPOSITION / **FINISH**	**SNL OR CLASS**	**TECH/SVC STOCK NO.**
METAL WOOD / PAINTED		

LOGISTICS DATA	LEVEL A MILITARY				LEVEL B LIMITED MILITARY			
	QTY PER PACK	EXTERIOR SIZE	GR WT	CUBE	QTY PER PACK	EXTERIOR SIZE	GR WT	CUBE
ITEM		33 1/16 X 18 1/16 X 13 1/8	46.5	4.47		SAME		
UNIT PACKAGE	1	33 1/16 X 18 1/16 X 13 1/8	46.5	4.47		AS		
INTERMEDIATE PKG.	0					LEVEL 'A'		
EXTERIOR PACK	1	33 1/16 X 18 1/16 X 13 1/8	46.5	4.47				

PACKAGING REQUIREMENTS	MIL-P-116 UNIT PROTECTION: METHOD III CLEANING C-1 DRYING						MIL-P-116 UNIT PROTECTION: METHOD CLEANING DRYING					
	DWG. OR SPEC.	SIZE	STYLE	TYPE	GRADE	CLASS	DWG. OR SPEC.	SIZE	STYLE	TYPE	GRADE	CLASS
PRESERVATIVE		TOUCH UP ANY UN-						SAME				
ULTIMATE WRAP		PAINTED SURFACES						AS				
CUSHIONING		USING MIL-E-74						LEVEL 'A'				
CONTAINER		ENAMEL OF A MATCH-										
CLOSURE		ING COLOR,										

	INTERMEDIATE PACKAGE						INTERMEDIATE PACKAGE					
	DWG. OR SPEC.	SIZE	STYLE	TYPE	GRADE	CLASS	DWG. OR SPEC.	SIZE	STYLE	TYPE	GRADE	CLASS
CONTAINER												
CLOSURE												

PACKING REQUIREMENTS	EXTERIOR PACK TYPE OF LOAD 1 JAN-P-100						EXTERIOR PACK TYPE OF LOAD 1 JAN-P-100					
	DWG. OR SPEC.	INSIDE DIMENSIONS	STYLE	TYPE	GRADE	CLASS	DWG. OR SPEC.	INSIDE DIMENSIONS	STYLE	TYPE	GRADE	CLASS
CASE LINER		SEE NOTE A						SEE NOTE A				
CONTAINER												
		SEE NOTE B						SEE NOTE B				

STRAPPING	QQ-S-781;790	SEE APPLICABLE BOX SPEC	QQ-S-781;790	SEE APPLICABLE BOX SPEC
MEASUREMENTS SIZES IN INCHES WEIGHT IN LBS. CUBAGE IN FT.	LEVEL C MINIMUM MILITARY PACKAGE		LEVEL C MINIMUM MILITARY PACK	
	SAME AS LEVEL 'A'		SAME AS LEVEL 'A'	

MARKING - *(Packages and Containers shall be marked as specified by Mil-STD-129 by referenced specifications or notes below).* *

NOTES: * SHALL BE APPLIED TO CHEST BY MEANS OF TAGS OR LABELS IN A MANNER THAT WILL NOT DAMAGE THE CHEST WHEN REMOVED.

A 33 1/16 X 18 1/16 X 13 1/8.

B APPLY 1 LENGTH OF STEEL STRAPPING, QQ-S-781, TYPE IV, CLASS A OR B, 5/8 X .020 GIRTHWISE AROUND CENTER OF BOX

SPECIFICATION MIL-P-14232 SHALL APPLY FOR GENERAL PACKAGING, PACKING AND MARKING REQUIREMENTS.

PREPARING ACTIVITY	DATE
PICATINNY ARSENAL	15 OCTOBER 1962
REVISION	DATE
A	16 MARCH 1964
PACKAGING DATA SHEET NO.	
P8864491	
SHEET 1 OF 1 SHEETS	

PACKAGING DATA SHEET for GROUP

00 FORM 1 AUG 57 2130 REPLACES 00 FORMS 1946, 1946-2 AND 1946-3, OF 1 APR 1956, WHICH ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.