[INCH-POUND]
A-A-2870
April 20, 1995

COMMERCIAL ITEM DESCRIPTION

TABLEWARE, PLASTIC

The General Services Administration has authorized the use of this commercial item description (CID), for Federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers plastic tableware suitable for use in dining halls, hospitals and in the field. Class 2 items have greater impact strength than class 1 items and are primarily used by the military. Class 3 items are suitable for use in microwave ovens.

2. CLASSIFICATION

2.1 Classification. Plastic tableware shall be of the following classes, items, and colors, as specified (see 7.4):

Classes:

1 - Melamine formaldehyde with alpha cellulose filler
2 - Melamine formaldehyde with fabric filler
3 - Bulk molding compound
4 - Polycarbonate or Polyetherimide

Items:

1 - Plate, eating, dinner, round, 9 inches (228.6 mm), with hardened surface (see fig. 1)
2 - Plate, eating, dinner, oval, 10-1/4 inches by 7-1/2 inches (260.4 x 190.5 mm) with hardened surface (see fig. 2
3 - Plate, eating, salad, round, 7 inches (177.8 mm), with hardened surface (see fig. 3)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

4 - Bowl, eating, general purpose, 17-ounce (0.5 l) (see fig. 4)
5 - Platter, food-serving, oval, 10-1/2 inches by 15 inches (266.7 x 381 mm), 1 inch high (25.4 mm) (see fig. 5)
7 - Tumbler, drinking, 10-ounce (0.3 l) (see fig. 6)
8 - Cup, drinking, 1 handle, 10-ounce (0.3 l) (see fig. 7)
10 - Bowl, food serving, fruit, 6-1/2 ounce (0.2 l) (see fig. 8)
12 - Dish, food serving, vegetable, 1-quart (0.95 l) (see fig. 9)
15 - Plate, eating, bread and butter (see fig. 10)
16 - Plate, eating, dinner (see fig. 11) (class 1 only)
17 - Cup, drinking, 8-ounce (0.24 l) (see fig. 12)
18 - Saucer, cup, matching (for use with item 17) (see fig. 13)
20 - Bowl, eating, general purpose, 16-ounce (0.47 l) (see fig. 14)
24 - Bowl, eating, fruit, 4-1/2 ounce (0.13 l) (see fig. 15)

Colors (see 3.7.1)
Green, Sahara Sand, Mottled Tan, Cocoa Brown

3. SALIENT CHARACTERISTICS

3.1 Illustrative figures. Except for items 4, 7, and 8, figures are illustrative only and are not intended to preclude any commercial design otherwise conforming to requirements specified herein.

3.2 NSF International compliance. The tableware shall comply with the applicable requirements of NSF International Standard No. 36. Prior to approval of first shipment, the contractor shall submit to the contracting officer or authorized representative satisfactory evidence that the items offered meet the applicable requirements of NSF International Standard No. 36. Satisfactory evidence of this compliance may be any of the following:

a. A listing in the current edition of the NSF International "Listing of Food Service Equipment" or display of the NSF International mark on the finished item, or

b. A certification issued by NSF International under the special one-time contract evaluation/certification service, or

c. A certified test report from a recognized independent testing laboratory, acceptable to the contracting officer and the medical authority of the service for which the items are being procured, indicating that the item has been tested and conforms to NSF International Standard No. 36. Acceptability of the testing laboratory by the medical authority shall be determined prior to initiation of procurement actions.

3.3 Preproduction sample. When specified (see 7.4), before production is commenced, four samples of each item of tableware shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 5 2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T08:26Z
Check the source to verify that this is the current version before use.

this commercial item description. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.4 Material.

3.4.1 Class 1 tableware. The material used for the manufacture of the class 1 general purpose tableware shall be a melamine formaldehyde with alpha cellulose filler. The material shall conform to type 1 of ASTM D 704, except that the electrical property requirements under table I shall not apply.

3.4.2 Class 2 tableware. The material used for the manufacture of the class 2 heavy duty tableware shall be melamine formaldehyde with fabric filler. The melamine formaldehyde material used for class 2 tableware shall conform to type 12 of ASTM D 704, except that minimum flexural strength shall be 11,000 psi (75.8 MPa) and the electrical property requirements under table I shall not apply.

3.4.3 Class 3 tableware. The material used for the manufacture of the class 3 tableware shall be a bulk molding compound (BMC). The bulk molding compound shall consist of unsaturated polyester resins with reinforcements and other additives including catalysts, fillers, release agents, thermoplastic materials and coloring systems. The BMC shall comply with the following standards:

Bulk Molding Compound (BMC) Standards:

Characteristic	Value	ASTM Standard
Specific Gravity	1.75 - 1.92	D 792
Water Absorption	0.20 %	D 570
Impact Strength, Notch Izod	1.0 ft-lbf/in min.	D 256
Minimum Flexural Strength	5,000 psi (34.5 MPa)	D 790
Min. Deflection Temperature	200°C (392 °F).	D 648
Barcol Hardness	65 minimum	D 2583

NOTE: 1.0 ft-lbf/in equals 53.3 J/m.

3.4.4 Class 4 tableware. The material used for the manufacture of the class 4 tableware shall be either polycarbonate or polyetherimide virgin resin. The material shall meet FDA regulation 21 CFR 177.1580 or 177.1595, respectively, for wet and dry food contact applications suitable for fabricating containers or accessories.

3.5 Dimensions. The dimensions of the tableware items shall be as shown on applicable figures.

3.6 Color and finish.

3.6.1 Color. The tableware shall be in accordance with the standard color chips of FED-STD-595. Each of the following colors shall be within its range of color numbers as shown below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

Green - 24525, 24504 and 24533,
Sahara sand - 33717, 33711 and 23613
Mottled tan - See 3.6.1.1, Cocoa brown - See 3.6.1.2

3.6.1.1 Mottled tan. The lighter colored areas of mottled tan tableware shall be within the range of tan color numbers 20450, 21643, 22563 and 23531 of FED-STD-595. The darker colored areas shall be within the range of brown color numbers 20140, 20219, 20227 and 20313 of FED-STD-595.

3.6.1.2 Cocoa brown. The lighter colored areas of cocoa brown tableware shall be within the range of cocoa brown numbers 10219, 10233 and 10371 of FED-STD-595. The darker colored areas shall be within the range of cocoa brown color numbers 10045, 10049 and 10080 of FED-STD-595.

3.6.2 Finish The surface of the tableware items shall have a uniformly high luster throughout, produced by molding. No surface shall be painted or otherwise treated with a protective coating or other adulterant except for items 1, 2, and 3 of class 2 tableware which shall be treated with a hardened surface that is molded into the surface of items 1, 2, and 3. No machining of surfaces shall be permitted except for removal of flash at dividing line of mold. Flash or parting line after machining shall be burnished.

3.7 Uniformity. All items of tableware shall be uniform in texture, finish, gloss density, color and shade, and other properties. No particles of metal, cured resin flash, dirt or synthetic materials in the form of fabric, yarn, or thread which cause imperfections in the molded item will be permitted. Dark spots caused by dark-colored fabric materials shall be permitted on class 2 material to the extent described herein.

3.7.1 Inside surfaces of tableware (side on which food or liquid is placed), class 2. No dark spot more than 1/4 inch (6.4 mm) in largest dimension will be permitted on any class 2 tableware items. For the food-serving platter no more than 6 spots and for all other items no more than 4 spots of a size larger than 1/8 inch (3.2 mm) but smaller than 1/4 inch (6.4 mm) in largest dimension, will be permitted. For the food serving platter no more than 12 spots of any size and for all other items no more than 9 spots of any size, visible when observed at arm's length, will be permitted.

3.8 Performance characteristics:

3.8.1 Food stains. The class 1,2, and 3 dinnerware shall be capable of exposure to common foods for 24 hours without permanent staining. The foods shall include white vinegar (5% acid), shredded carrots, mustard, catsup, canned blueberries, and beets. Each food item shall be added to a single part, covered with plastic wrap, and left for 24 hours at room temperature. After hand washing with liquid dish detergent and a bleach solution then drying, the test surface shall show no signs of cracks, chaulking, or change in surface color.

Source: https://assist.dla.mil Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.8.2 Microwave oven transparency. Class 3 dinnerware shall be capable of withstanding heating in a 700-watt microwave oven (empty and uncovered) for 15 minutes without exceeding 350° Fahrenheit (177°C) surface temperature or showing signs of deterioration or drastic color change.

3.8.3 Surface hardness. Class 2 tableware, items 1, 2, and 3 only, and class 3 tableware shall be capable of passing the knife cutting station test cited in NSF International Standard No. 36, Appendix A, Use and Wear Exposure Test Methods. The items shall be capable of completing the test without evidence of deterioration or visible scratches.

3.8.4 Warpage, food serving platter. Warpage of the food serving platter shall not exceed 1/16 inch (1.6 mm) when the platter is upside down on a flat surface and held firmly in place with a 10 pound (4.5 Kg) weight positioned at the center of the item. Warpage shall be measured by attempting to an insert a feeler gauge of the specified maximum thickness (1/16 inch, 1.6 mm) between the item and the flat surface. Any area allowing passage of the gauge shall be cause for rejection of the item. Warpage shall not exceed 1/16 inch (1.6 mm) when the platter is placed upright and the same procedure applied.

3.9 Knockout pin marks. Knockout pin marks, if hidden under normal use of item, shall not protrude more than 1/32 inch (0.8 mm) above or extend more than 1/64 inch (0.4 mm) into the surface of the item or affect stability of item when resting on a flat surface. Knockout pin marks, if not hidden under normal use of item, shall not protrude above or extend into the surface of the item more than 1/64 inch (0.4 mm).

3.10 Marking for identification. Tableware items shall be permanently and distinctly marked with the manufacturer's name or trademark. Marking shall be located so as not to detract from appearance of the item.

3.11 Workmanship. The finished tableware shall have rounded edges and shall be clean, well made and free from warpage. Tableware shall be free from any defects which may affect appearance or serviceability.

3.12 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.13 Standard commercial product. The tableware shall, as a minimum, be in accordance with the requirements of this cid and shall be the manufacturer's standard commercial product. A standard commercial product is a product which has been sold or is currently offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures, and represents the latest production model.

4. REGULATORY REQUIREMENTS

4.1 FDA requirements. The plastic material used in the tableware shall meet the applicable requirements of 21 CFR 177, Federal Food, Drug, and Cosmetic Act.

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Preproduction sample approval. When required, a preproduction sample shall be submitted to the Government for approval. The tableware shall be inspected by the Government for compliance in design, construction and workmanship required by this commercial item description.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Part identification numbering system. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

Part Identification Numbering System for A-A-2870

```
Example:  AA2870-11G     (AA2870-11G)   Example - Class 1, Item 1,
                                                  Green color
                 |  |||
                 |  |||--- Color (G - Green, S - Sahara Sand,
                 |  |                T - Mottled Tan, B - Cocoa Brown)
                 |  |--- Item (1, 2, 3, 4, 5, 7, 8, 10, 12, 15, 16,
                 |                 17, 18, 20, 24)
                 |------ Class (1, 2, 3, or 4)
                 |------- Commercial Item Description number
```


Source: https://assist.dla.mil -- Downloaded: 202640-26T08:26Z
Check the source to verify that this is the current version before use.

7.2 Sources of documents

7.2.1 Sources of Governmental documents. Copies of Federal specifications are available from the Federal Supply Service Bureau, Specifications Section (3FBP-W), Suite 8100, 470 E. L'Enfant Plaza, S.W., Washington, DC 20407.

Copies of the Code of Federal Regulations (CFR) are available from:

Superintendent of Documents
US Government Printing Office
Washington, DC 20402.

7.2.2 Sources of non-Government association documents.

ASTM standards are available from the American Society for Testing and Materials (ASTM), 1916 Race Street, Philadelphia, PA 19103.

NSF International standards are available from NSF International, P.O. Box 130140, Ann Arbor, MI 48113-0140.

7.3 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this commercial item description.
(b) Class, item, and color required (see 1.2).
(c) Whether preproduction sample is required (see 3.3)
(d) The preservation, packing, and marking required.

7.4 National Stock Numbers (NSN's). The following is a list of NSN's assigned which correspond to this commercial item description. This list may not be indicative of all possible NSN's.

NSN	Class	Item	Color
7350-00-205-3211	1	5	Sand
7350-00-205-3160	1	10	"
7350-00-205-3161	1	12	"
7350-00-205-3218	1	15	"
7350-00-205-3219	1	16	"
7350-00-634-2864	1	17	"
7350-00-205-3213	1	18	"
7350-00-205-3220	1	20	"
7350-01-036-5429	2	1	Sand
7350-01-037-5165	2	2	"
7350-01-036-5430	2	3	"
7350-00-251-8746	2	4	Tan
7350-00-141-0959	2	4	Green
7350-01-036-5431	2	7	Brown

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

NSN	Class	Item	Color
7350-00-141-0965	2	7	Green
7350-01-036-3770	2	7	Sand
7350-00-223-7836	2	7	Tan
7350-00-141-0971	2	8	Green
7350-00-223-7760	2	8	Tan
7350-01-036-5424	2	8	Brown
7350-01-036-3769	2	8	Sand
7350-01-036-5427	2	20	"
7350-00-080-6062	2	24	Green
7350-00-080-6048	2	24	Tan
7350-01-036-5426	2	24	Sand

Military Coordinating Activity:

Army - GL

Custodians:

Army - GL
Navy - SA
Air Force - 99

Preparing Activity:

GSA - FSS

Review Activities:

Army - MD, QM
Air Force - 35, 84

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

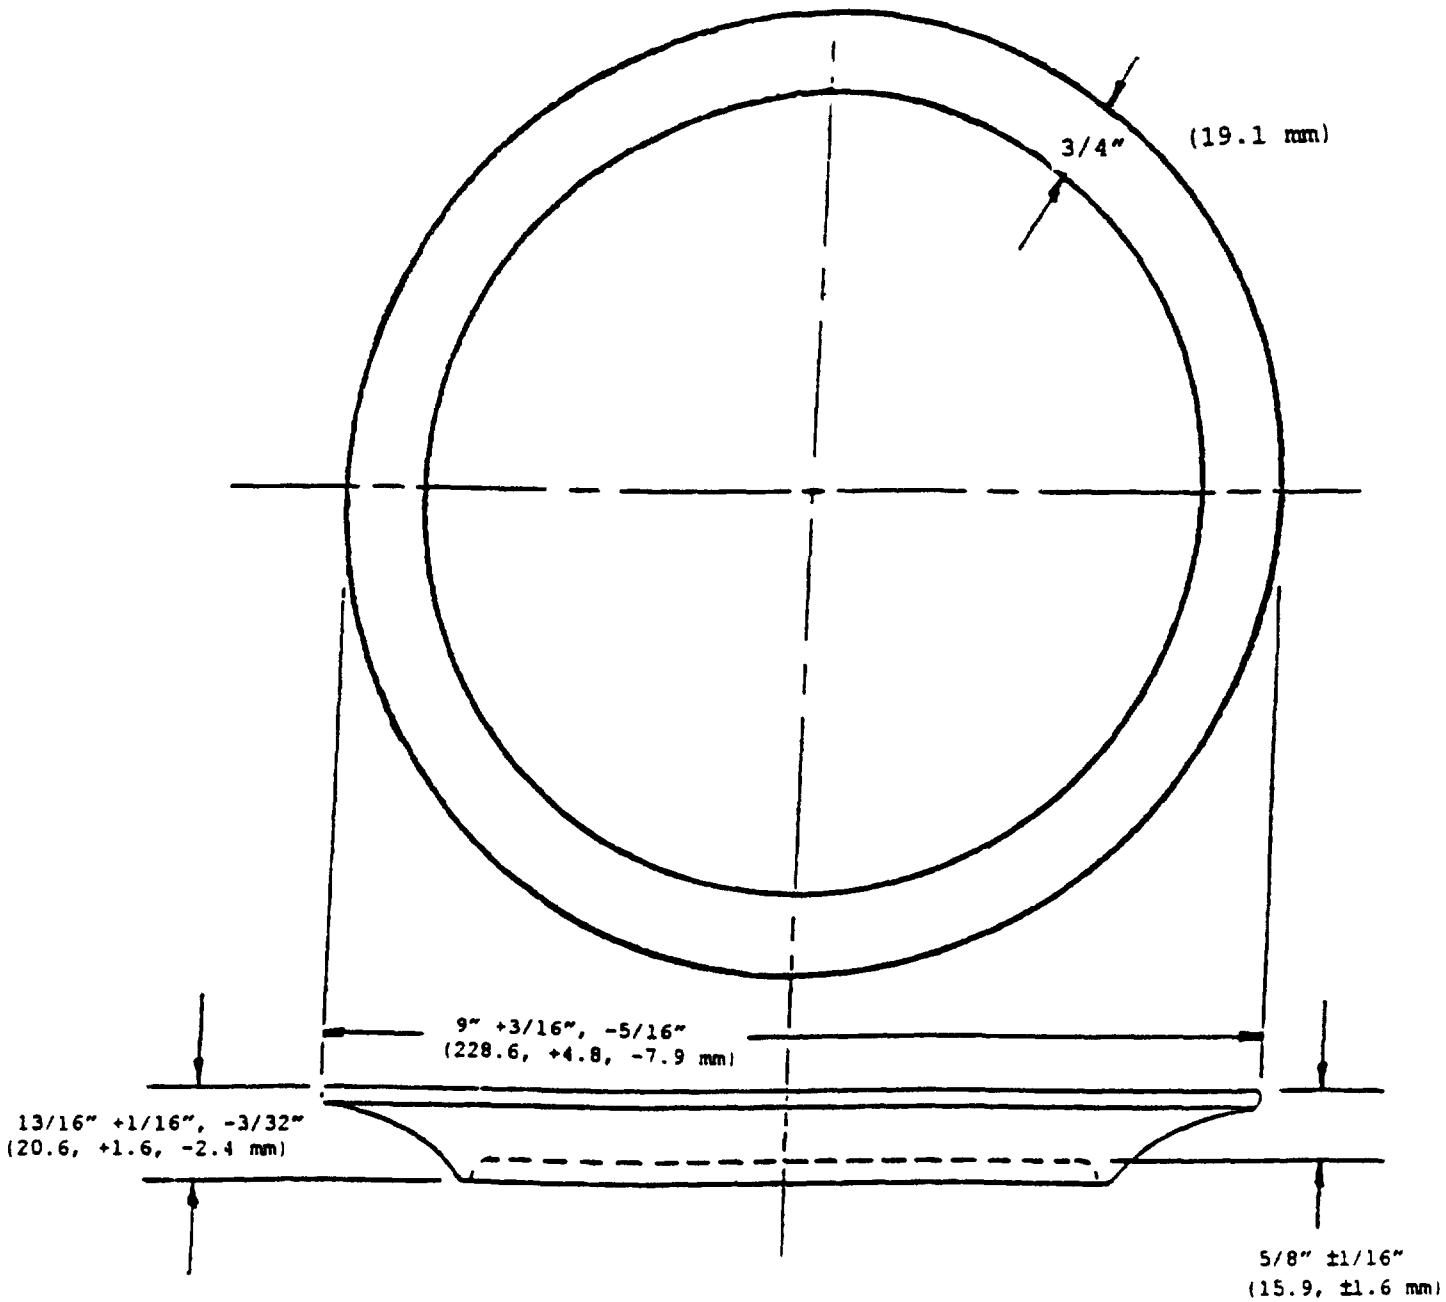


FIGURE 1 - Plate, Eating, Dinner, Round, 9-inch

Minimum thickness (Class 1 & 2) - 0.10 inch (2.5 mm)
Minimum thickness (Class 3) - 0.09 inch (2.3 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

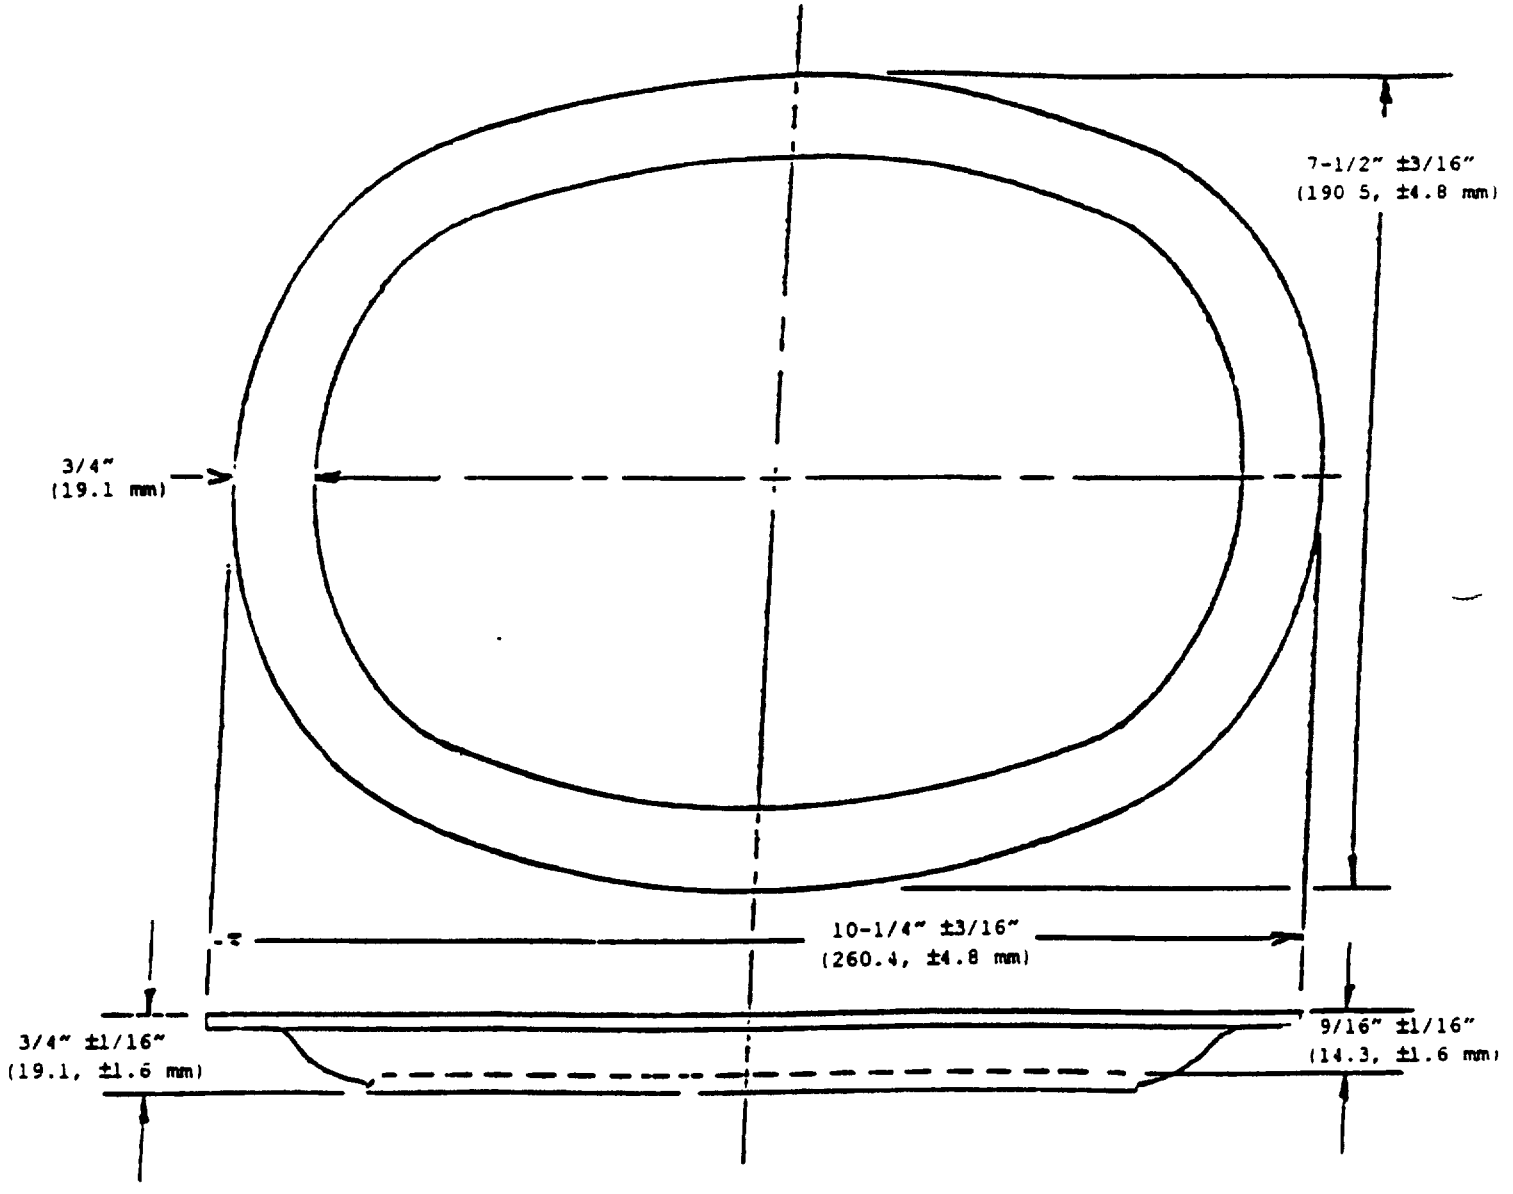


FIGURE 2 - Plate, Eating, Dinner, Oval

Minimum thickness (Class 1 & 2) - 0.10 inch (2.5 mm)
Minimum thickness (Class 3) - 0.09 inch (2.3 mm)

Source: https://assist.dla.mil - Downloaded: 202640-26T08:26Z
Check the source to verify that this is the current version before use.



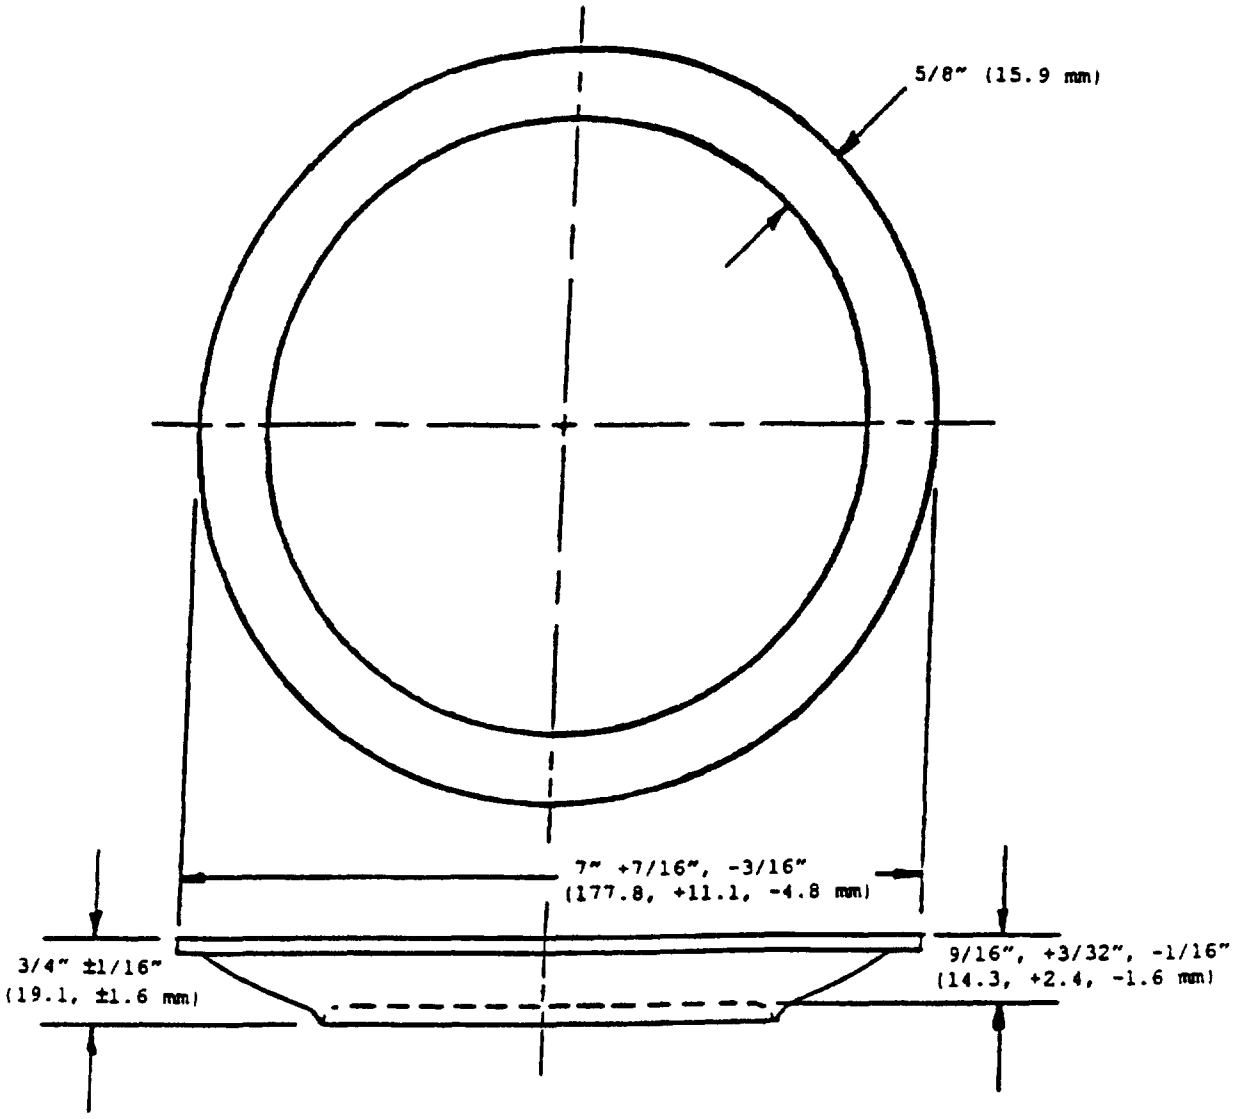


FIGURE 3 - Plate, Eating, Salad, Round

Minimum thickness (Class 1 & 2) - 0.10 inch (2.5 mm)
Minimum thickness (Class 3) - 0.09 inch (2.3 mm)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

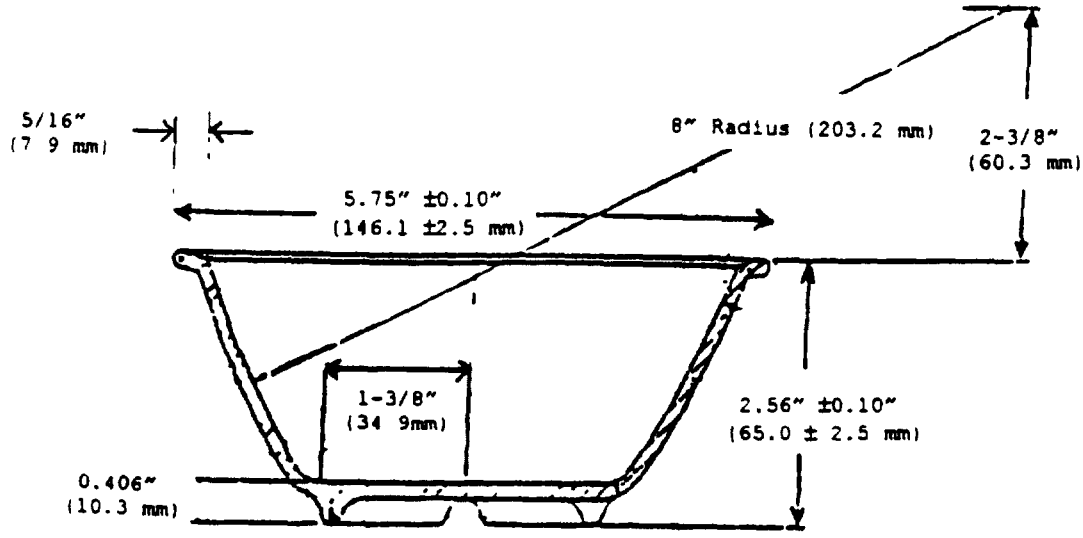

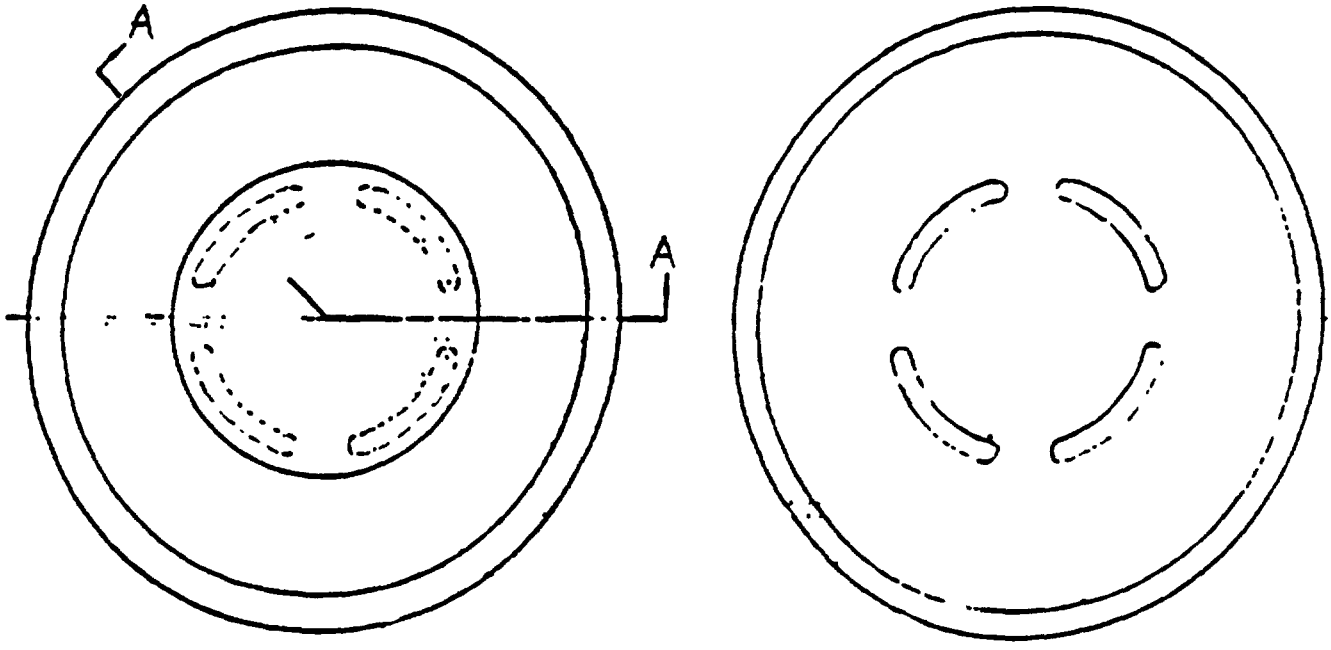

TOP VIEW

SECTION A-A

FIGURE 4 - Bowl, Eating, General Purpose, 17 ounce
Minimum bottom thickness (Class 1 & 2) - 0.15 inch (3.8 mm)
Minimum Bottom thickness (Class 3) - 0.10 inch (2.5 mm)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.



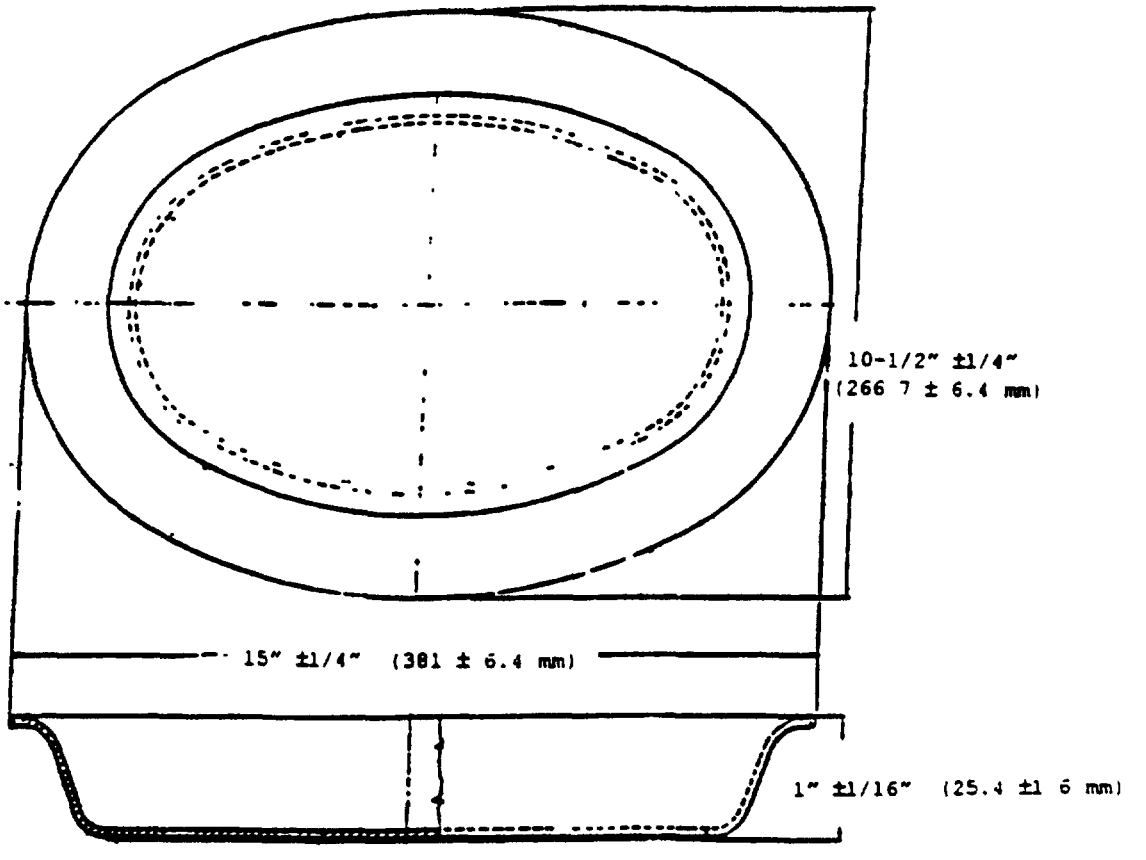



FIGURE 5 - Platter, Food-Serving, Oval
Minimum thickness (Class 1 & 2) - 0.125 inch (3.2 mm)
Minimum thickness (Class 3) - 0 10 inch (2.5 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:26Z
Check the source to verify that this is the current version before use.



TOP VIEW

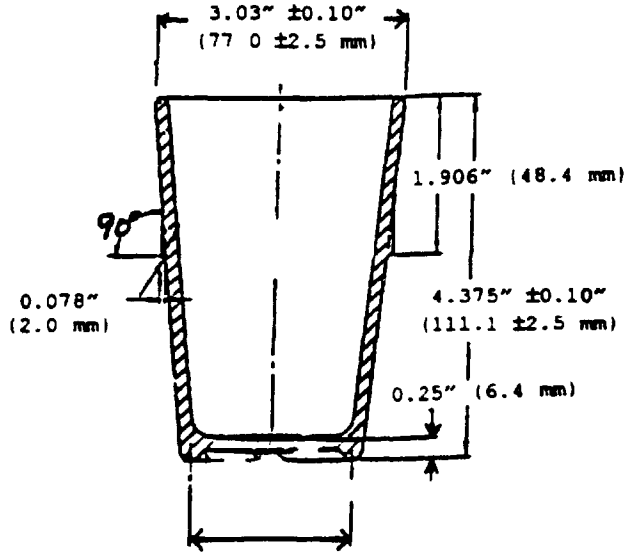



BOTTOM VIEW

FIGURE 6 - Tumbler, Drinking, 10-ounce
Minimum thickness (Class 1 & 2) - 0.15 inch (3.8 mm)
Minimum thickness (Class 3) - 0.12 inch (3.0 mm)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.



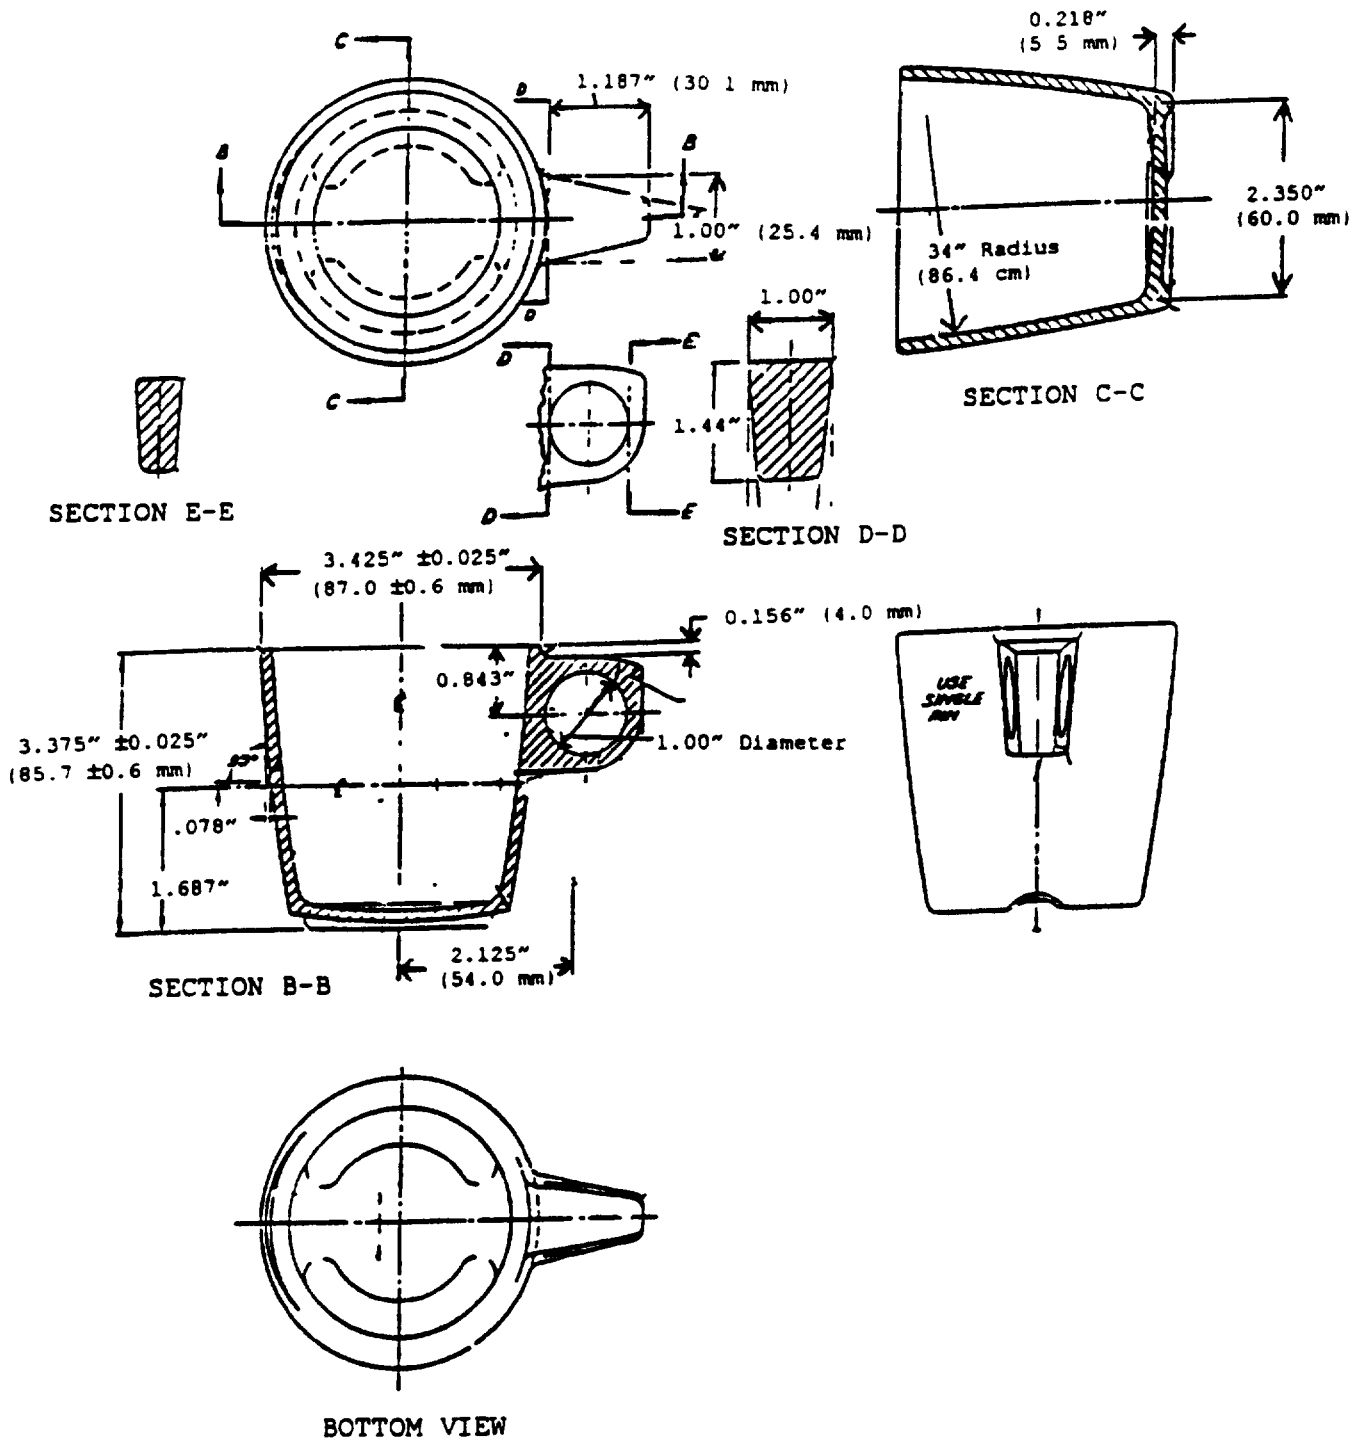


FIGURE 7 - Cup, Drinking, 1-handle
Minimum thickness (Class 1 & 2) - 0.15 inch (3.8 mm)
Minimum thickness (Class 3) - 0.12 inch (3.0 mm)
Note: Break all corners and edges.
Blend all curves smoothly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

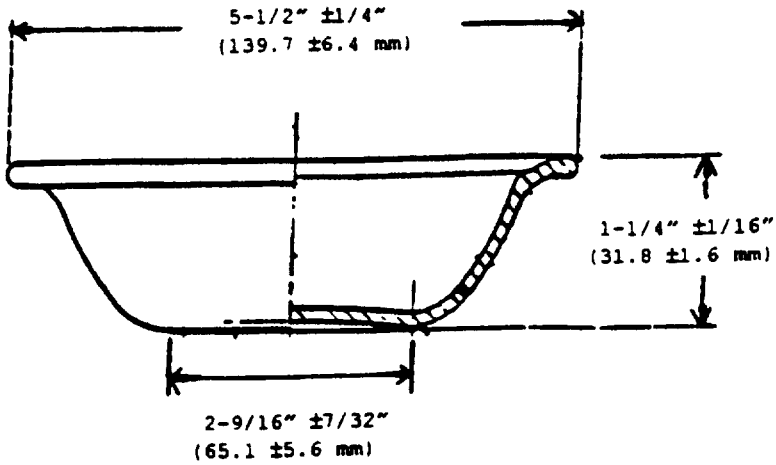

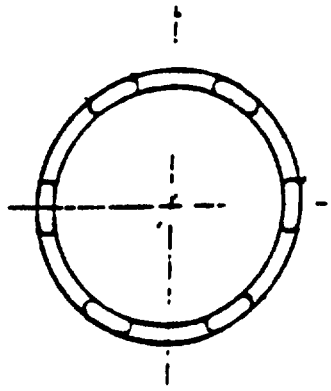

BOTTOM VIEW

FIGURE 8 - Bowl, Food Serving, Fruit
Capacity - 6-1/2 oz., +/- 1 oz.
(0.19 l, ± 29.5 ml)
Minimum weight - 3 oz (85.1 gm)
Minimum thickness (Class 1 & 2) - 0.10 inch (2.5 mm)
Minimum thickness (Class 3) - 0.09 inch (2 3 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

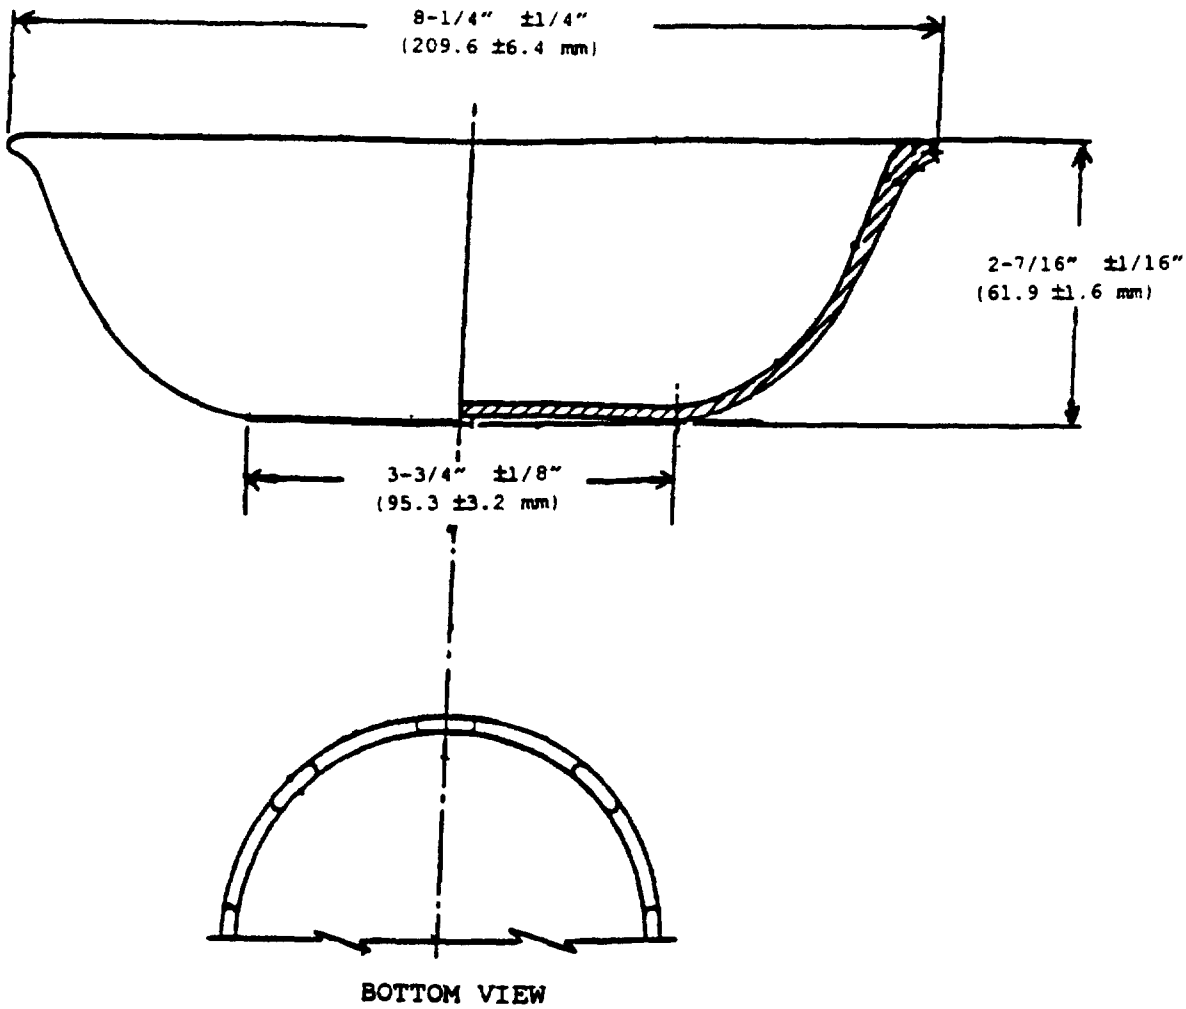


FIGURE 9 - Dish, Food Serving, Vegetable
Capacity - 1-quart, +/- 3 oz.
(0.95 l, +/- 88.5 ml)
Minimum weight - 10 oz. (283.5 gm)
Minimum thickness (Class 1 & 2) - 0.125 inch (3.2 mm)
Minimum thickness (Class 3) - 0.10 inch (2.5 mm)
Alternate Oval Design
Major Axis: 10-3/8 inches +3/8, -1/2 inch (263.5 +9.5, -12.7 mm)
Minor Axis: 7-1/8 inches ± 3/8 inch (181.0 ±9.5 mm)
Height: 2 inches +/- 1/4 inch (25.4 ±6.4 mm)
Note: Break all corners and edges
Blend all corners smoothly

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

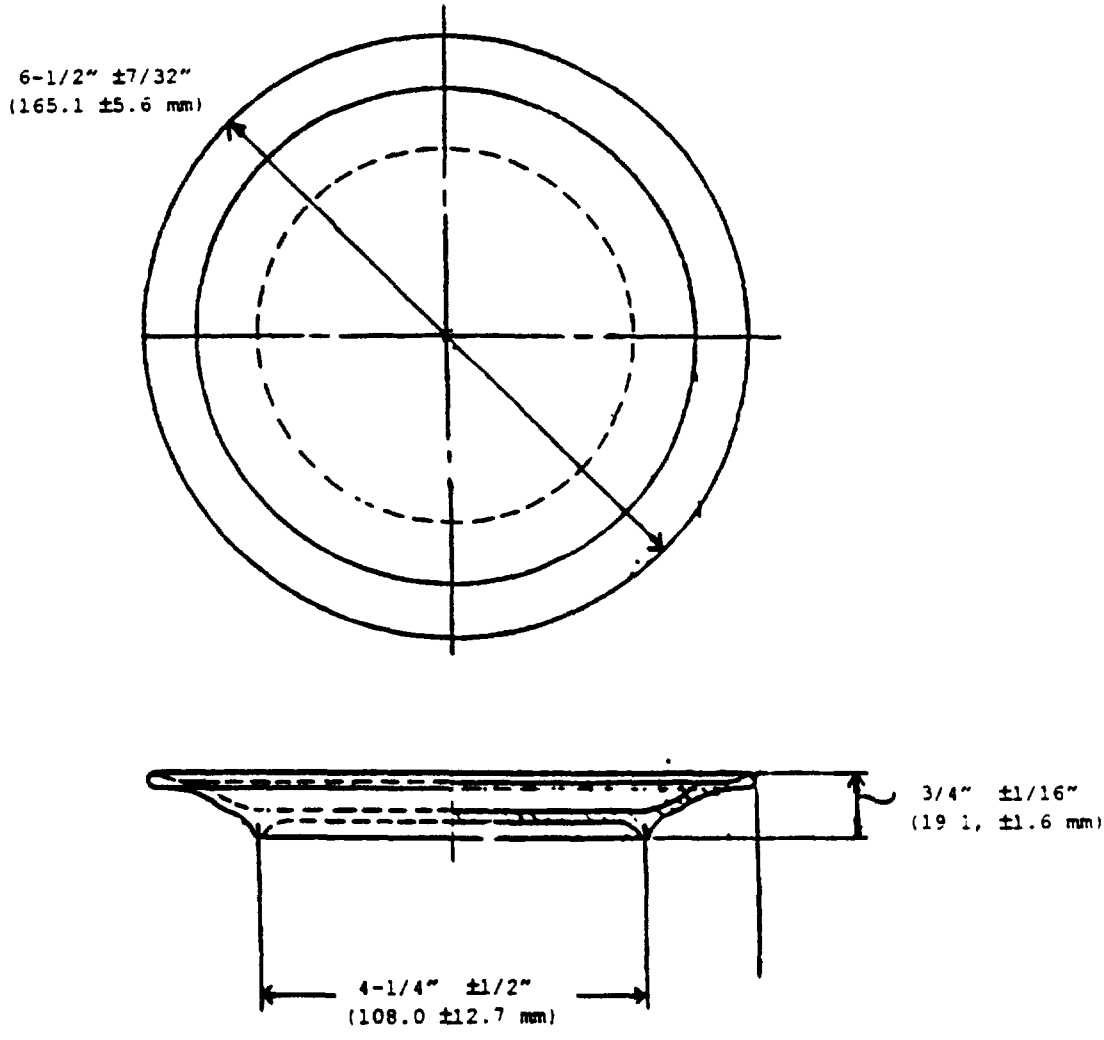


FIGURE 10 - Plate, Eating, Bread and Butter
Minimum weight - 3 oz. (85.1 gm)
Minimum thickness (Class 1 & 2) - 0.10 inch (2.5 mm)
Minimum thickness (Class 3) - 0.09 inch (2.3 mm)
Note: Break all corners and edges
Blend all corners smoothly

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.



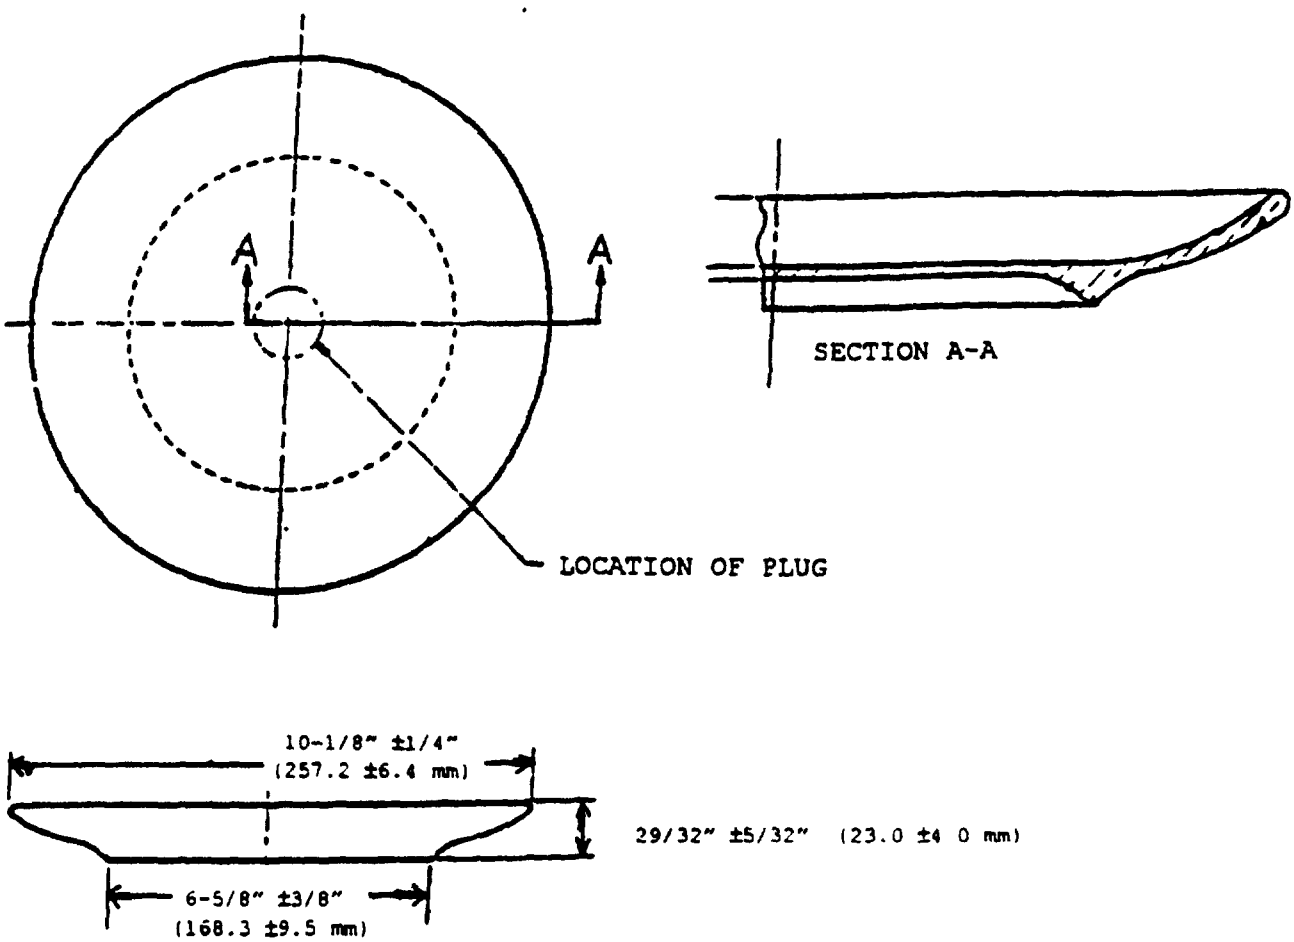


FIGURE 11 - Plate, Eating, Dinner
Minimum weight - 9.0 oz. (255.2 gm)
Minimum thickness (Class 1 & 2) - 0.10 inch (2.5 mm)
Minimum thickness (Class 3) - 0.09 inch (2.3 mm)
Note: Break all corners and edges
Blend all corners smoothly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

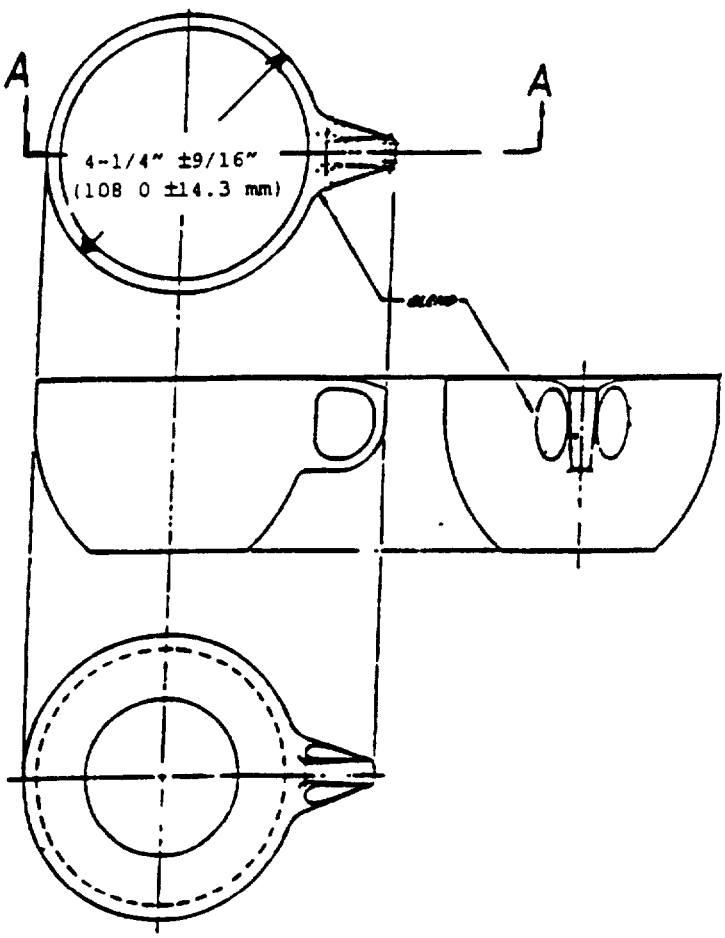


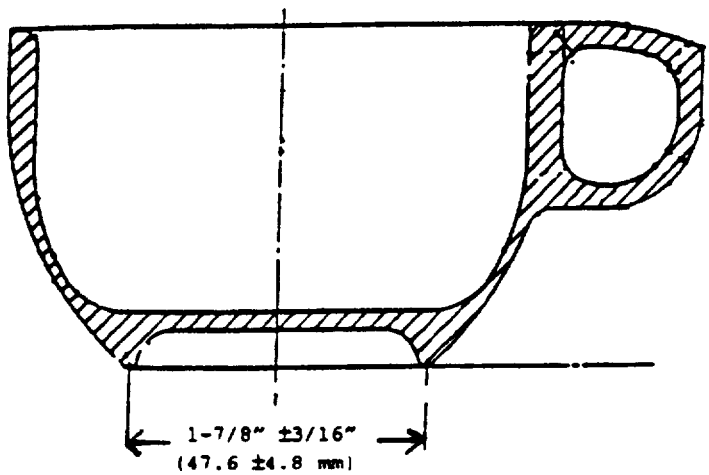


SECTION A-A

FIGURE 12 - Cup, Drinking, 8-ounce
Minimum weight - 3-1/4 oz. (92.1 gm)
Minimum thickness, thinnest section (Class 1 & 2) - 0.08 inch
Minimum thickness, thinnest section (Class 3) - 0 09 inch
Height - 2-9/32 inches +/- 13/32 inch
(57.9 ± 10.7 mm)
Note: Break all corners and edges
Blend all corners smoothly

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

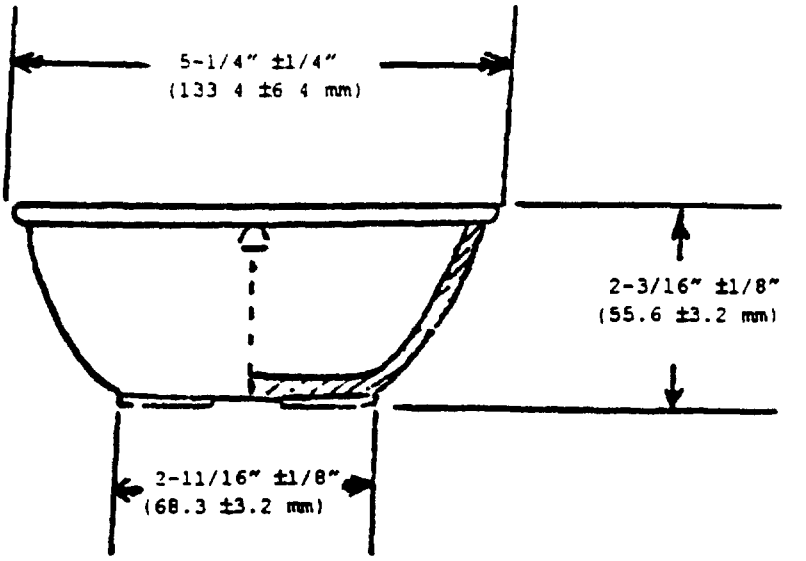

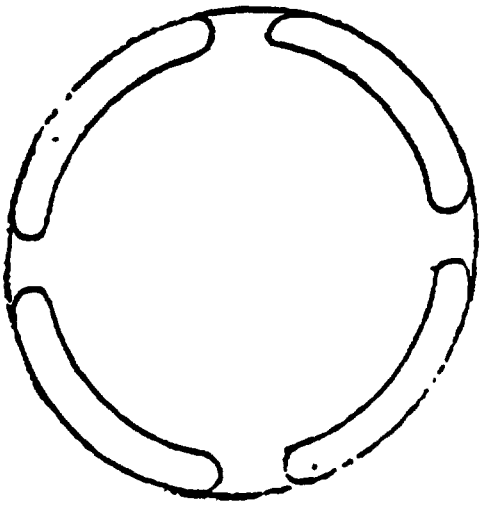

BOTTOM VIEW

FIGURE 13 - Saucer, Cup
Weight - 3-3/8 oz. minimum (95.7 gm)
Height - 3/4" ±3/32" (19.1 ±2.4 mm)
Minimum thickness (Class 1 & 2) - 0.10 inch (2.5 mm)
Minimum thickness (Class 3) - 0.09 inch (2.3 mm)
Note: Break all corners and edges
Blend all corners smoothly

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:26Z
Check the source to verify that this is the current version before use.



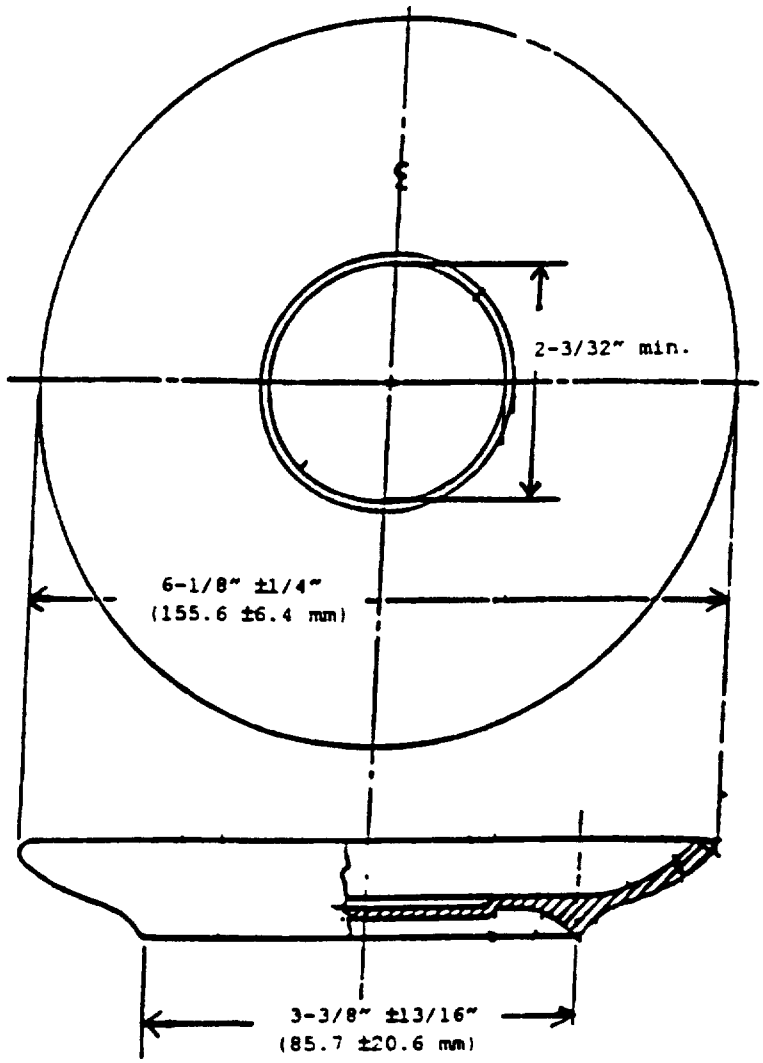


FIGURE 14 - Bowl, Eating, General Purpose, 16-ounce
Weight - 4 oz. ± 0.2 oz. (113.4 gm. ± 5.7 gm)
Minimum thickness (Class 1 & 2) - 0.09 inch (2.3 mm)
Minimum thickness (Class 3) - 0.08 inch (2.0 mm)
Note: Break all corners and edges
Blend all curves smoothly; Vented base;
minimum of 3 equally spaced lugs

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

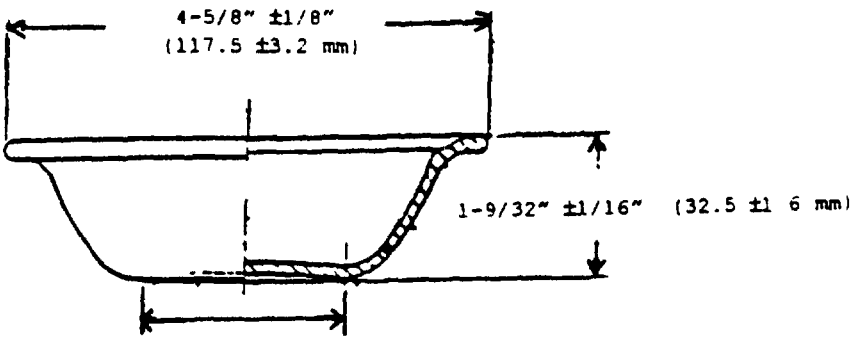



BOTTOM VIEW

FIGURE 15 - Bowl, Eating, Fruit, 4-1/2 ounce
Minimum weight - 2.0 oz. (56.7 gm)
Minimum thickness (Class 1 & 2) - 0.09 inch (2.3 mm)
Minimum thickness (Class 3) - 0.08 inch (2.0 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.