METRIC

DOD-W-70336/3
w/Amendment 1
8 April 2005


MILITARY SPECIFICATION SHEET

WASHER, LOCK, FLAT, INTERNAL TOOTH (METRIC)

Inactive for new design after 1 October 1999

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for aquiring the product described herein shall consist of this specification sheet and DOD-W-70336.

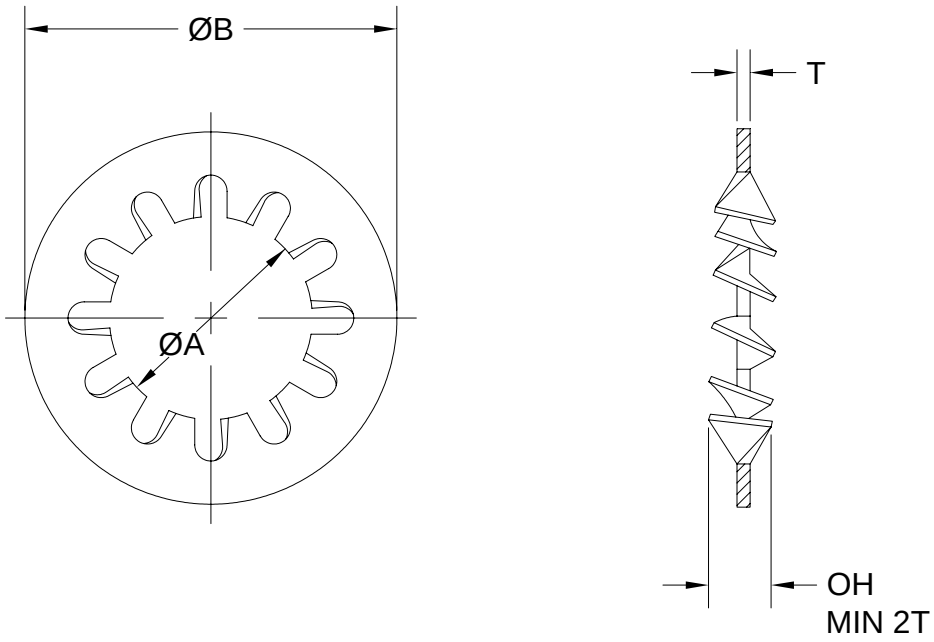

NOTE:

1. All dimensions are in millimeters, see Table I for dash numbers and dimensions.

FIGURE 1. WASHER, LOCK, FLAT, INTERNAL TOOTH (METRIC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS::


1. Material. Carbon steel,1050 thru 1064 (UNS G10500 thru UNS G10640), in accordance with ASTM A510M phosphor bronze, (UNS C51000) temper H04 in accordance with ASTM B139M and austenitic corrosion resistant steel (CRES) 300 Series, non-magnetic in accordance with SAE-AMS-QQ-S-763.

2. Surface hardness. Carbon Steel washers shall have a hardness of 40-50 HRC. Phosphor bronze washers shall have a hardness of 85-95 HRB. Austenitic corrosion resistant steel washers shall have a hardness of 35-43 HRC.

3. Protective coating and surface treatment. Carbon steel washers shall be cadmium plated (Code P) in accordance with SAE-AMS-QQ-P-416, Type II, Class 2. Phosphor bronze washers shall be tin plated (CodeT) in accordance with ASTM B545. Carbon steel and phosphor bronze washers may be plain (no code), with a light film of oil or rust inhibitor. CRES washers shall be passivated (Code P) in accordance with ASTM A380, or black oxide coated (Code B) in accordance with MIL-DTL-13924.

4. Part number. The part number consists of the letter “D” the basic number of this specification sheet, the finish code letter, and a dash number taken fromTable I.

EXAMPLE: D70336/3 – C 01

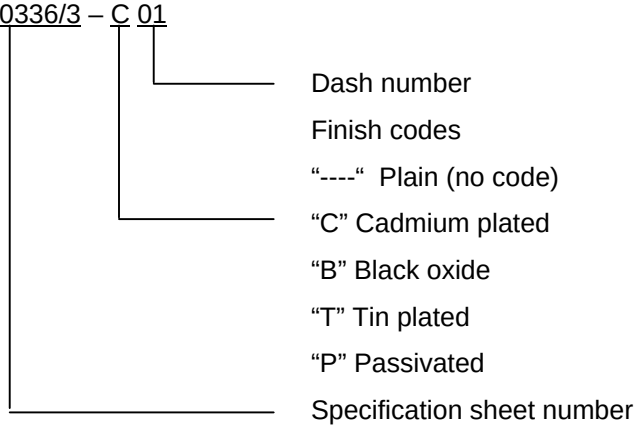

D70336/3-C01 Indicates - Washer, Lock, Flat, Internal Tooth; Spring Steel; Cadmium Plated; 1.7 mm ID; 3.6 mm OD; 0.3 mm thick

5 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

TABLE 1. DASH NUMBERS AND CHARACTERISTICS.

NOM SIZE	DASH NO.			∅A ID		∅B OD		THICKNESS T		FREE HEIGHT OH (REFERENCE) (2T,MIN)	NO. OF TEETH (MIN)
	CARBON STEEL	PHOSPHOR BRONZE	CRES		TOL		TOL		TOL		
1.6	01	21	41	1.7		3.6		0.3		0.6	6
1.8	02	22	42	1.8		3.8	0	0.3	± .02	0.6	6
2	03	23	43	2.2	+0.08	4.5	-0.08	0.3		0.6	6
2.5	04	24	44	2.7	0	5.5		0.4	± .03	0.8	6
3	05	25	45	3.2		6	0	0.4		0.8	6
3.5	06	26	46	3.7		7	-0.12	0.5		1	6
4	07	27	47	4.3		8		0.5	± .04	1	8
5	08	28	48	5.3	+0.12	10	0	0.6		1.2	8
6	09	29	49	6.4	0	11	-0.15	0.7	± .05	1.4	8
8	10	30	50	8.4	+0.15	15	0	0.8		1.6	8
10	11	31	51	10.5	0	18	-0.18	0.9		1.8	9
12	12	32	52	12.5		20.5		1	± .06	2	10
14	13	33	53	14.5	+0.18	24		1		2	10
16	14	34	54	16.5	0	26	0	1.2		2.4	12
18	15	35	55	19		30	-0.21	1.4	± .08	2.8	12
20	16	36	56	21	+0.21	33		1.4		2.8	12
					0						

Custodians:
Army - AT
Navy - OS
Air Force - 99

Preparing Activity:
DLA- IS

Review Activities:
Army – AV, CR, CR4
Navy – MC, SH
Air Force - 71
NSA - NS

(Project 5310-2717)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.