MILITARY SPECIFICATION SHEET

(A) FIXTURES, LIGHTING; FLUORESCENT, DETAIL LIGHTING FOR WATER GAGES

8 WATTS, 120 VOLTS, 60 HERTZ, SYMBOLS 151 AND 153

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

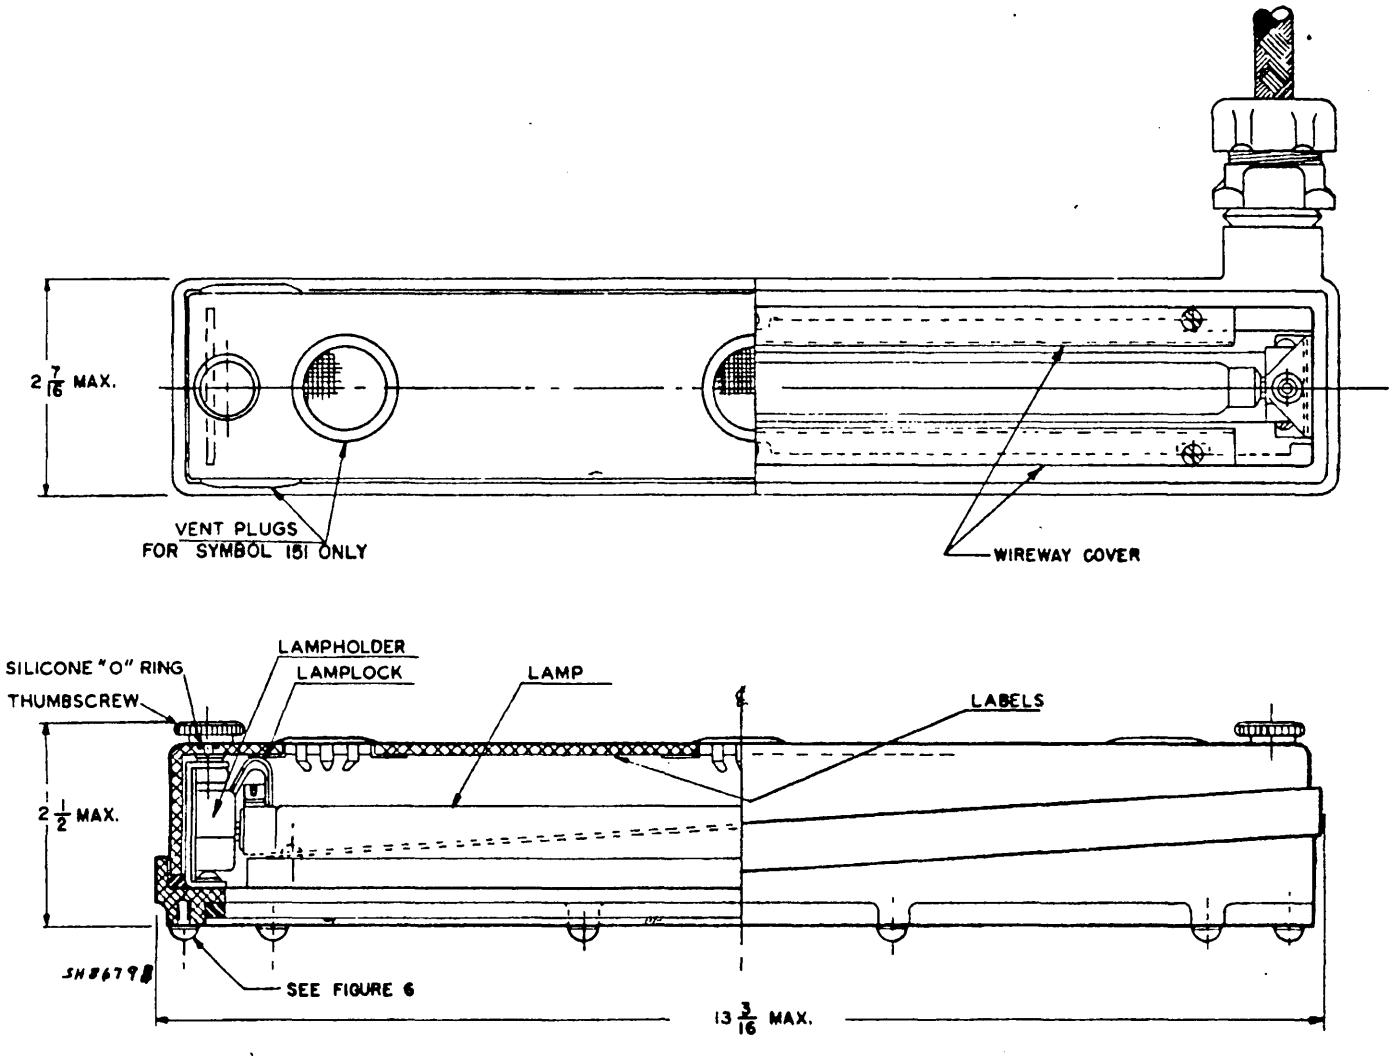


FIGURE 1. Typical view of Symbols 151 and 153.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

(A) Denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.


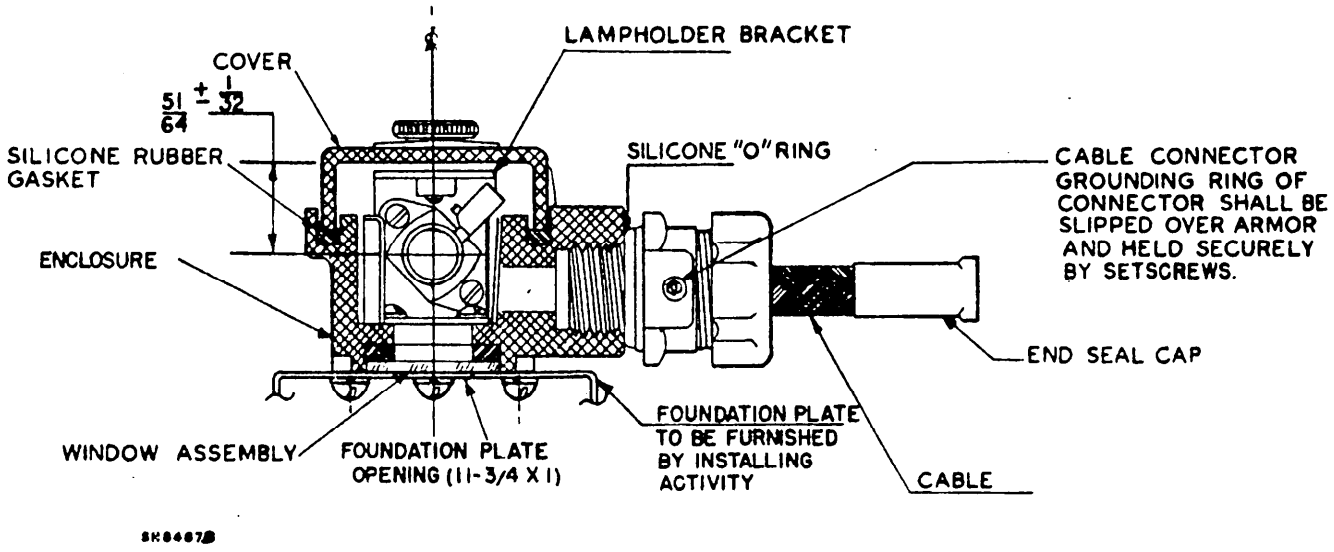


FIGURE 2. Typical section.

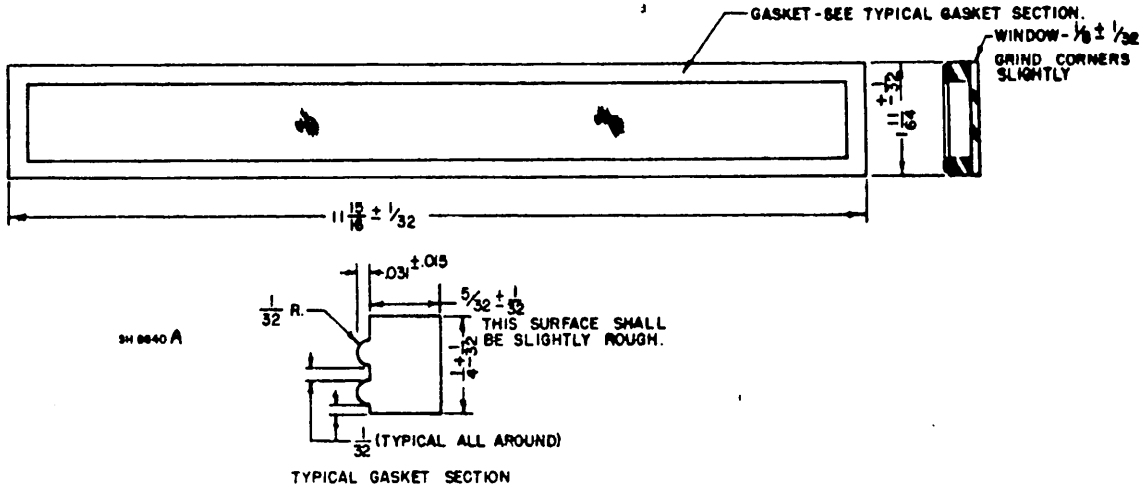

NOTE: DIMENSIONS SHOWN ARE FOR GLASS PORTION OF ASSEMBLY. GASKET SHALL BE FLUSH WITH OR MAY PROJECT SLIGHTLY OVER LENGTH AND WIDTH OF GLASS.

FIGURE 3. Window assembly.

Source: https://assist.dla.mil -- Downloaded: 20260-18T08:39Z
Check the source to verify that this is the current version before use.

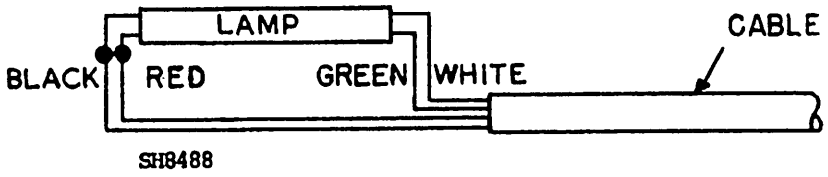


FIGURE 4. Wiring diagram.

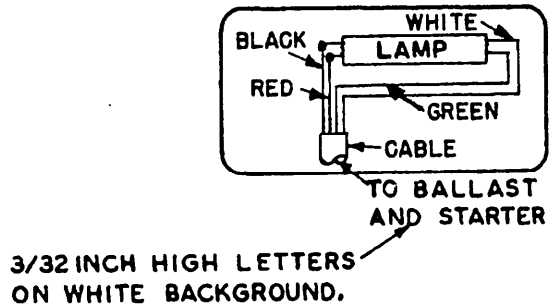


FIGURE 5. Type III label.

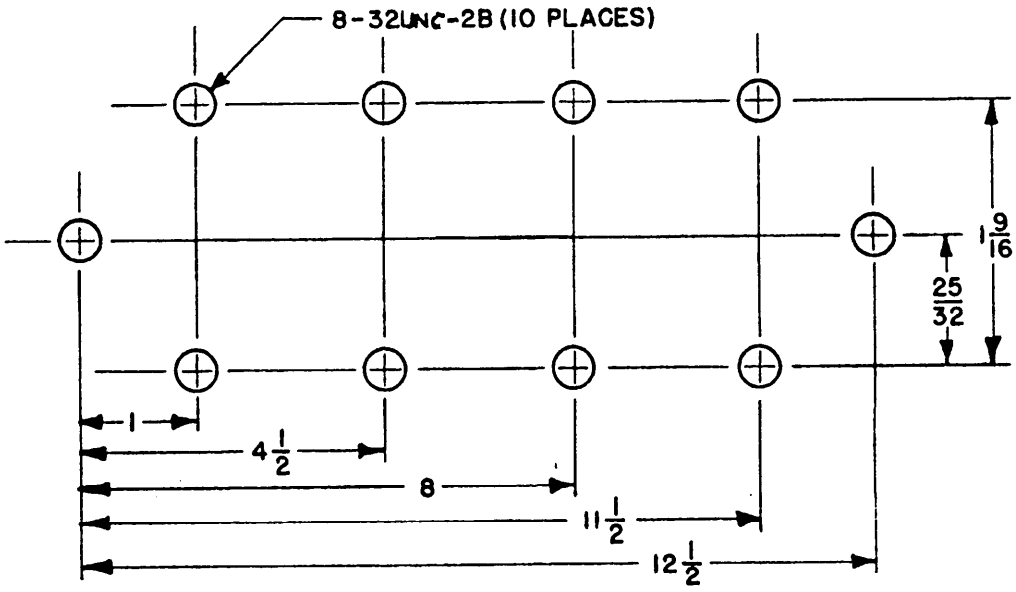


FIGURE 6. Mounting dimensions for bottom of enclosures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: I
Class: 1

SYMBOL NUMBERS:
151: Light, ventilated, with one 8-watt cool white lamp.
153: Light, watertight, with one 8-watt cool white lamp.

(A) DESIGN:
Electrical rating: 8 watts, 115 volts, 60 Hz a.c.
Dimensions and configuration: See figure 1
Typical section: See figure 2.
Operating temperature: 275°F. maximum.
Cable: 10 feet, type FSGU-3, of MIL-C-915/31. The free end of the cable shall be end sealed to prevent entrance of moisture (see figure 2).
Enclosure:
Symbol 151: Totally enclosed.
Symbol 153: Watertight.
Housing: Cast aluminum
Window assembly: See figure 3. Window glass shall be clear transparent, heat resistant, high-impact. The window gasket shall be silicone rubber, class 2b, grade 50, in accordance with ZZ-R-765 and shall be attached to the window with cement.
Wiring diagram: See figure 4.
Mounting dimensions: See figure 6.
Mounting plate: To be designed by the manufacturer to suit the particular gage with which the light is fitted as specified in the contract or order.
Lamp: W-L-116/3; industry number F8T5/CW (NSN 6240-00-299-5546).
Lampholder: MIL-L-970/15, (NSN 6250-00-075-5666).
Lamp lock: M16377/40-001
Weight: 4 lbs. 2 oz. maximum.
Designation and marking: The following labels shall be furnished in accordance with MIL-F-16377 applied as shown in figure 1.

(a) One type I.
(b) One type III. The type III label shall be shown on figure 5.
(c) One type IV. The information to be shown on the type IV label shall be "USE LAMP NSN 6240-00-299-5546 ONLY."

Instruction sheet: An instruction sheet containing the following information shall be furnished with each light: "This light is designed for use with a separately mounted ballast and starter box shown on MIL-F-16377/47, Symbol 455. The ballast and starter box is not furnished with the light and it must be ordered separately."

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	
Complete fixtures:	See table I
Window assemblies:	See table II
Quality conformance:	
Comparison inspection	Same as the first article inspection
Inspection of product for delivery:	
Examination:	See MIL-F-16377
Examination for preparation of delivery	See MIL-F-16377
Quality conformance tests:	See MIL-F-16377

GENERAL INFORMATION:

Assignment of Military part numbers and general information is as follows:

(a) The light described herein is intended for use on water gages.
(b) The light will be attached to the foundation plate by 10 No. 8-32-UNC-2A, 5/16" long screws provided with the light. The foundation plate is secured to the face of the water gage.
(c) The lens will be retained in place by the foundation plate.
(d) The ballast box and starter shown on MIL-F-16377/47 will not be supplied with the light.
(e) When lights are furnished as replacement parts or without mounting plate, window assembly shall be securely taped to fixture to prevent breakage during shipment.
(f) Assignment of Military part numbers and general information is shown in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

TABLE I. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness Symbol 153	3.5.11	4.8.14.4	Watertight
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness: Symbol 151: Symbol 153:	3.5.11	 4.8.14.1 4.8.14.4	 Totally enclosed Watertight
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Continuity of grounding	3.6.13.4	4.8.12	
Optical uniformity	3.7.4.1.1	4.8.4	
Magnetic permeability	3.4.8	4.8.18	
Temperature	3.5.17	4.8.19	

TABLE II. First article and comparison inspection for window assemblies.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Optical uniformity	3.7.4.1.1	4.8.4	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14.1	Watertight

TABLE III. Part number and general information.

Military Part number M16377/3-	Item name	National Stock Number (NSN)	Supersedes part number
151	Complete fixture, Symbol 151		MS17239
153	Complete fixture, Symbol 153	6210-00-768-7191	
001	Window assembly	6210-00-768-3943	MS17237-2

Preparing activity:
Navy - SH
(Project 6210-N551)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND
(SEA 3112)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-01-18T08:39Z
Check the source to verify that this is the current version before use.