
INCH-POUND
MIL-C-22249/4A(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/4(SHIPS)
19 April 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 44-PIN, COMPARTMENT SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

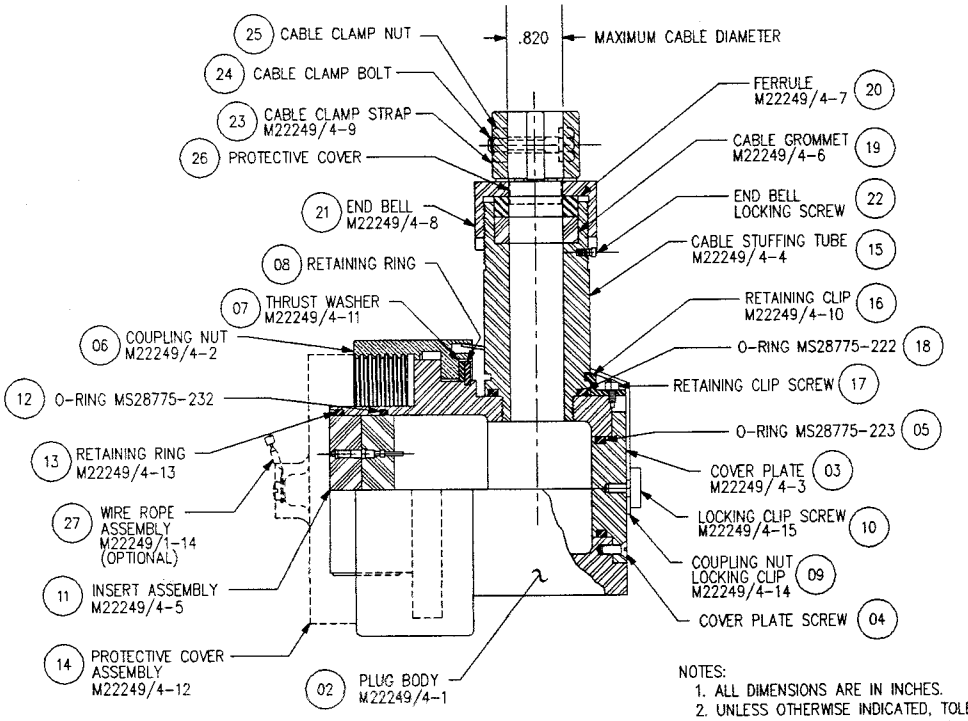

NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
2. UNLESS OTHERWISE INDICATED, TOLERANCES SHALL BE AS FOLLOWS:
   DECIMALS-PLUS OR MINUS 0.0025 INCH.
   FRACTIONS-PLUS OR MINUS 1/64 INCH.
   ANGULAR DIMENSIONS-PLUS OR MINUS 1/2 DEGREE.

FIGURE 1. Plug assembly, 44-pin, compartment side. (01)

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

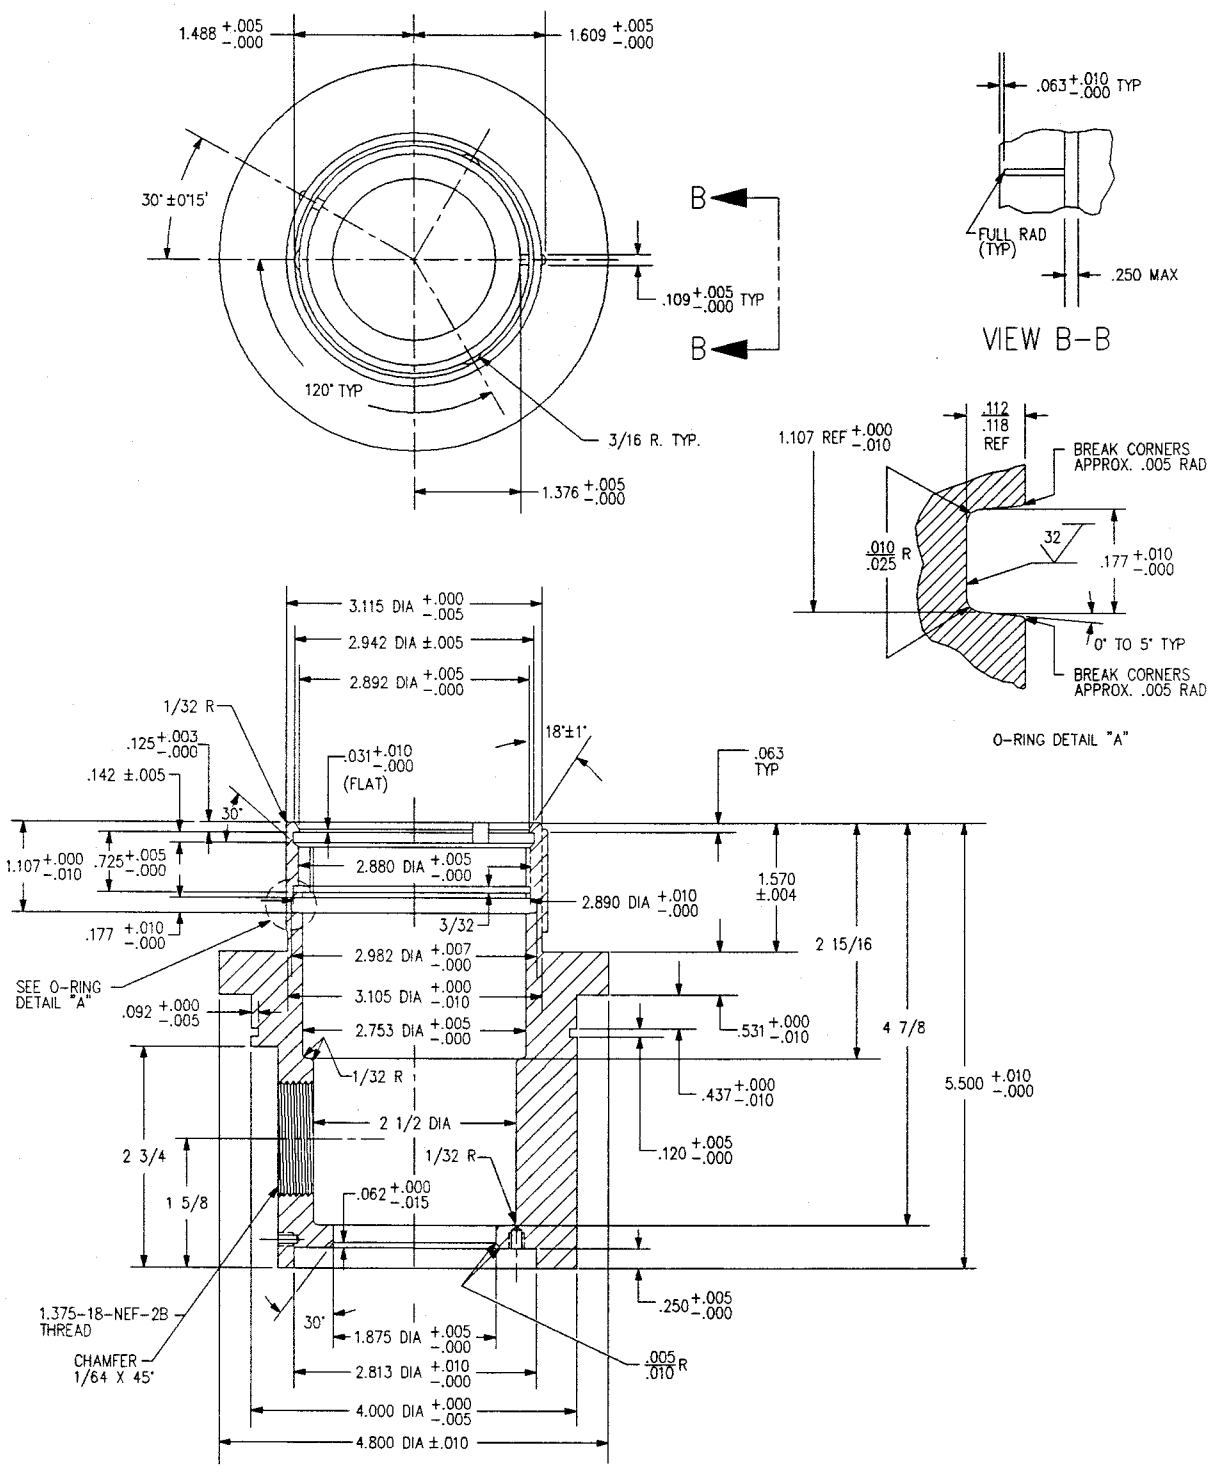


FIGURE 2. Plug body M22249/4-1. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

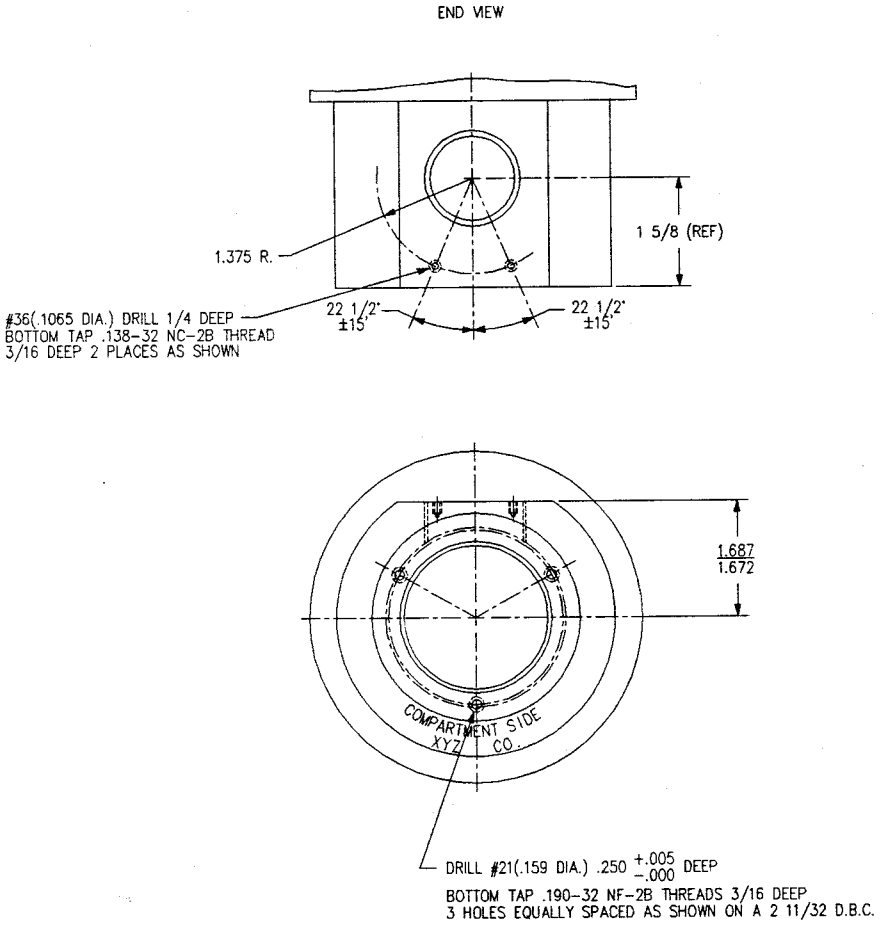


FIGURE 2 - Plug body M22249/4-1. - Continued (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.



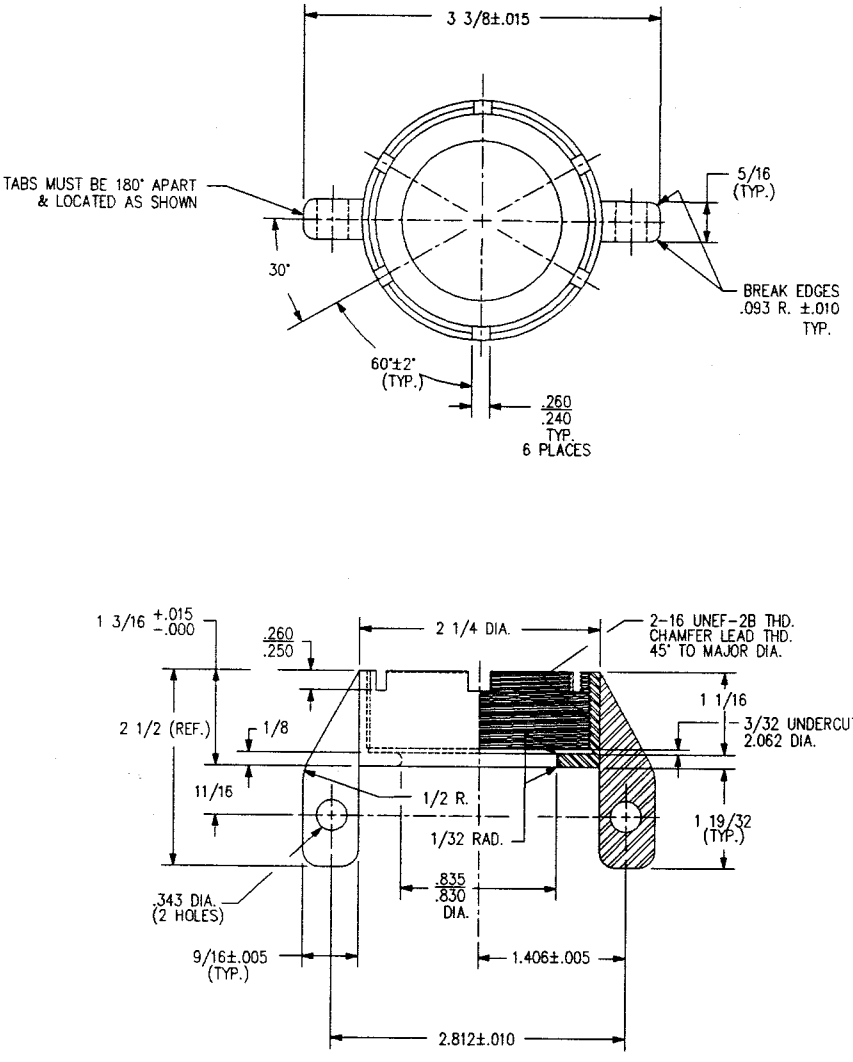


FIGURE 3. End bell M22249/4-8. (21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

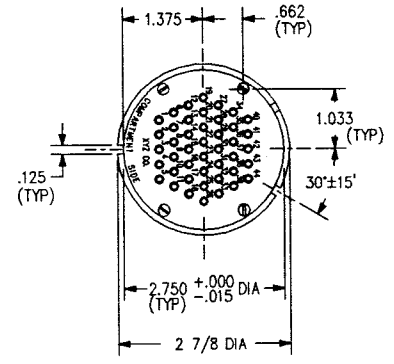



DETAIL OF SOCKET REAR

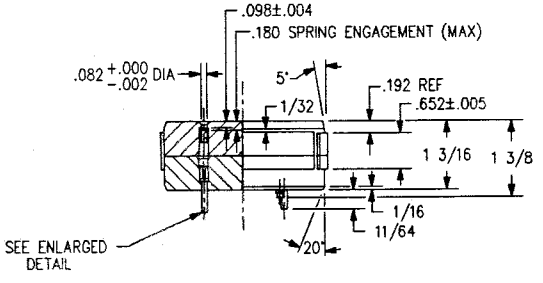


FIGURE 4. Insert assembly compartment side M22249/4-5. (11)

Source: https://assist.dla.mil -- Downloaded: 20261-19T11:34Z
Check the source to verify that this is the current version before use.


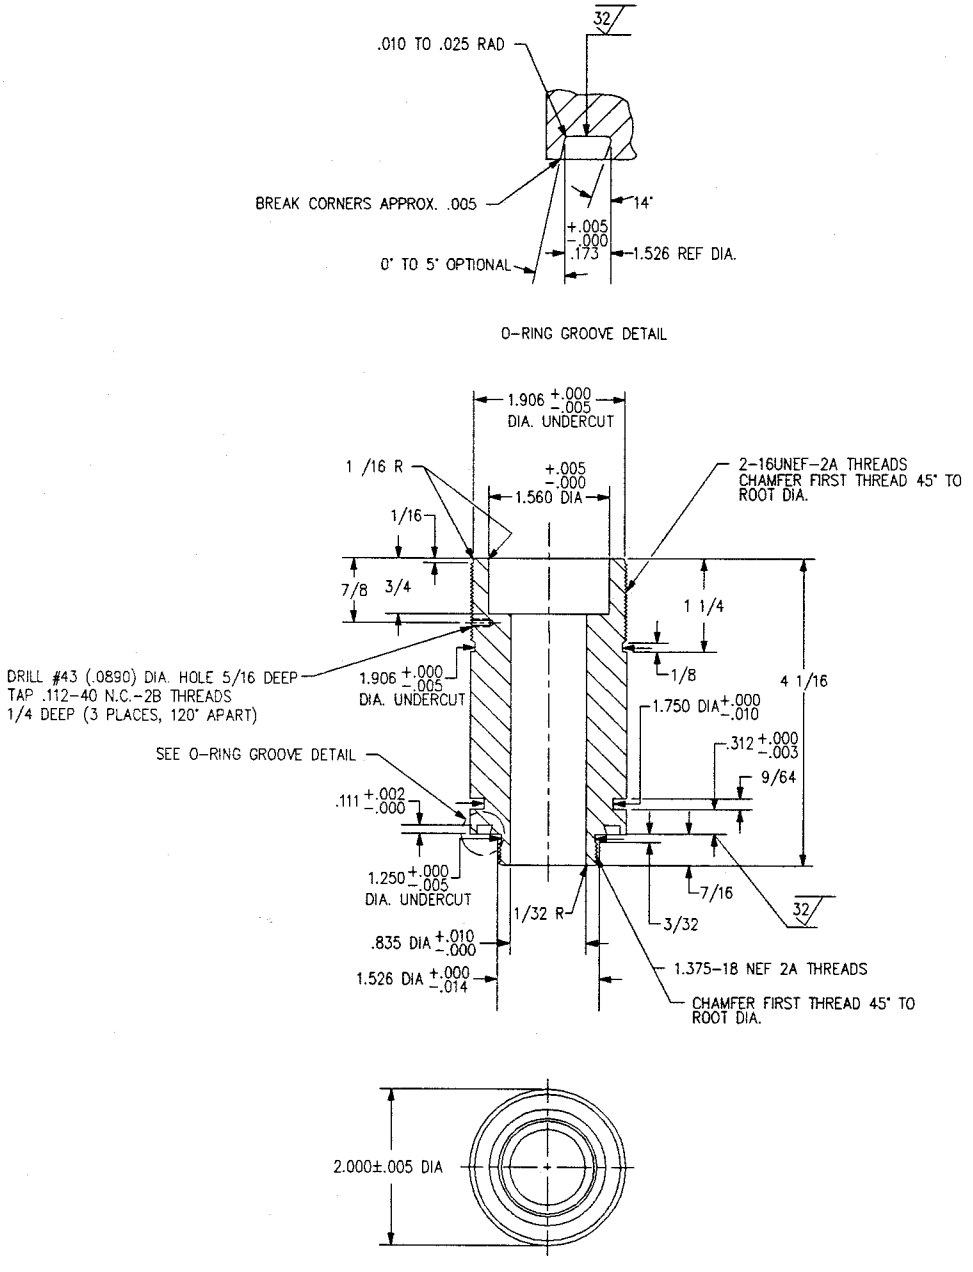


FIGURE 5. Cable stuffing tube M22249/4-4. (15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

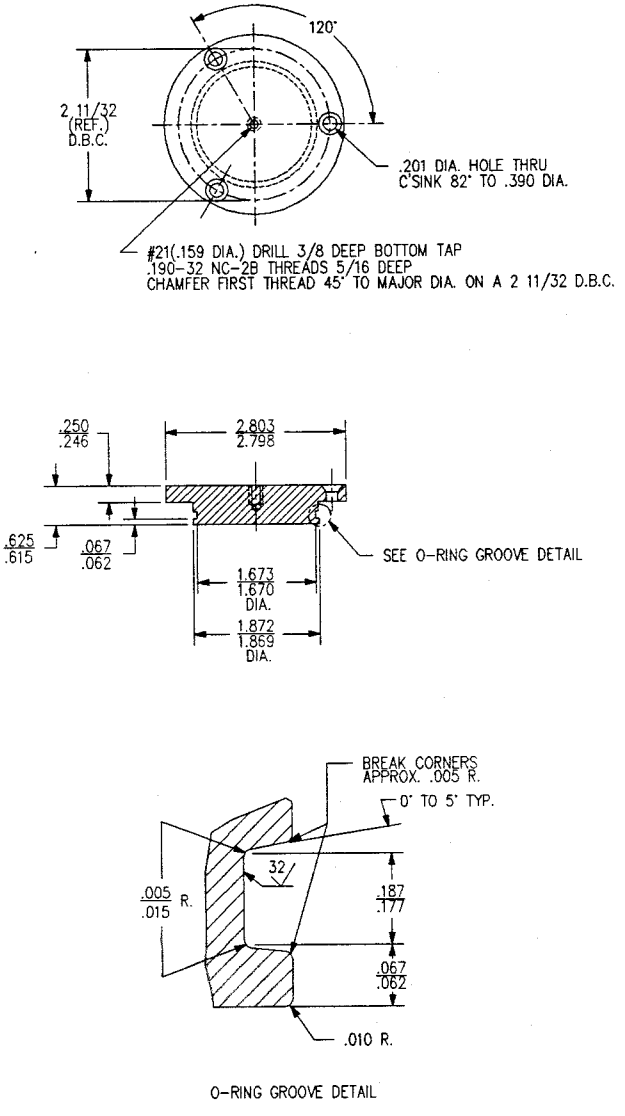

O-RING GROOVE DETAIL

FIGURE 6. Cover plate M22249/4-3. 03

Source: https://assist.dla.mil -- Downloaded: 20261-19T11:34Z
Check the source to verify that this is the current version before use.

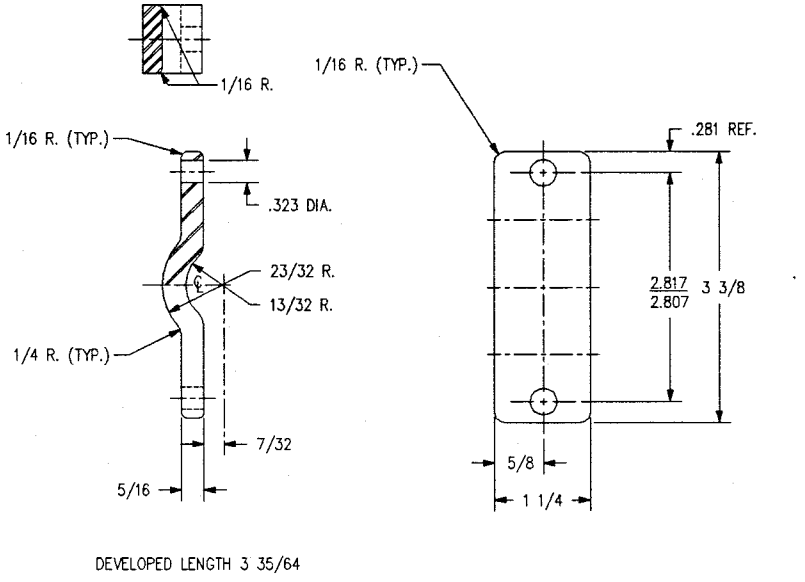


FIGURE 7. Cable clamp M22249/4-9. (23)

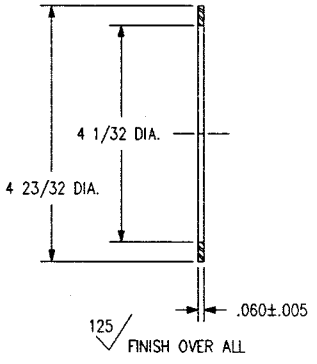


FIGURE 8. Thrust washer M22249/4-11. (07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

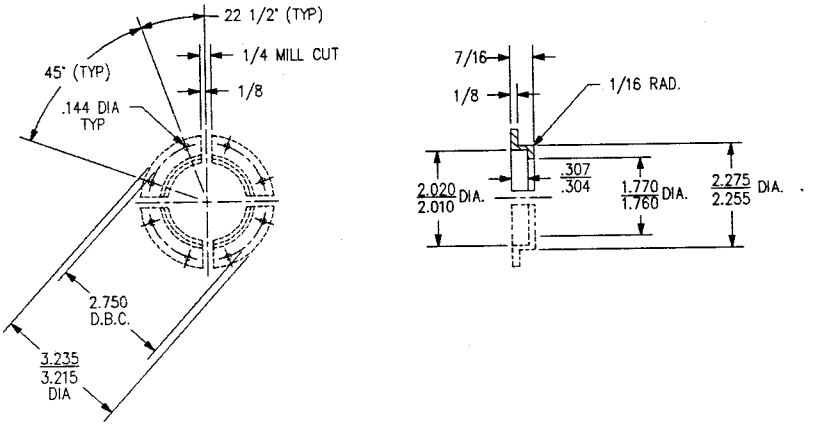


FIGURE 9. Retaining clip M22249/4-10. (16)

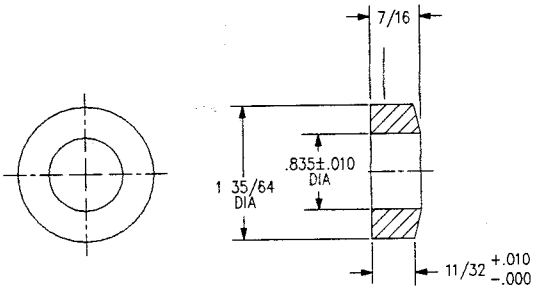


FIGURE 10. Ferrule M22249/4-7. (20)

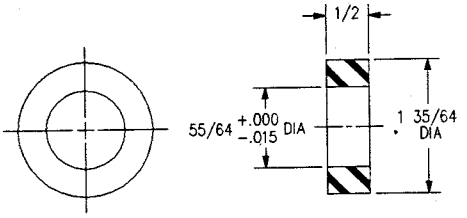


FIGURE 11. Cable grommet M22249/4-6. (19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

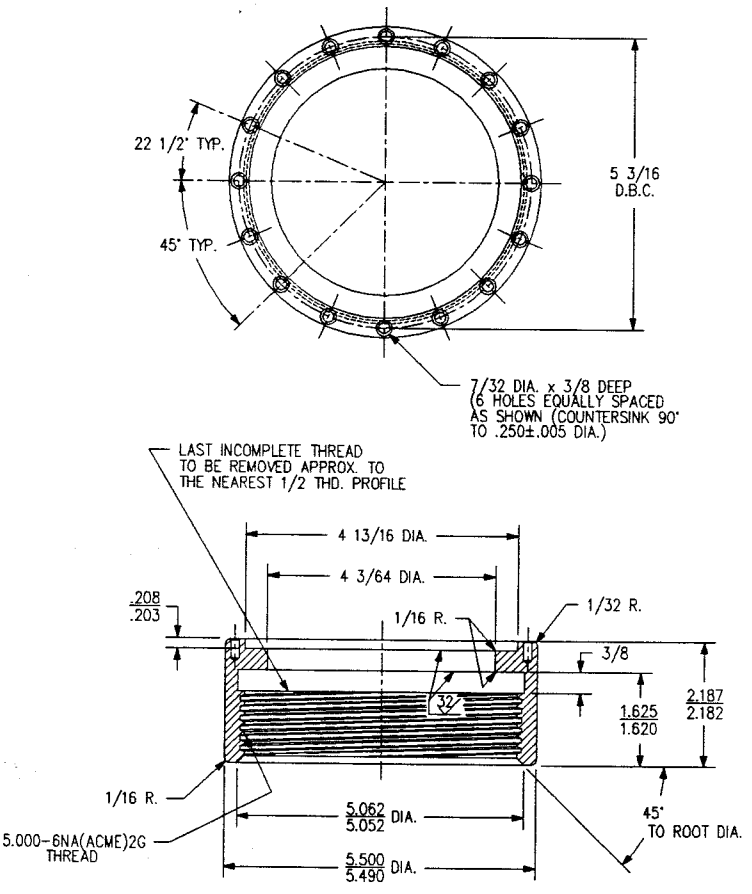


FIGURE 12. Coupling nut M22249/4-2. 06

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.



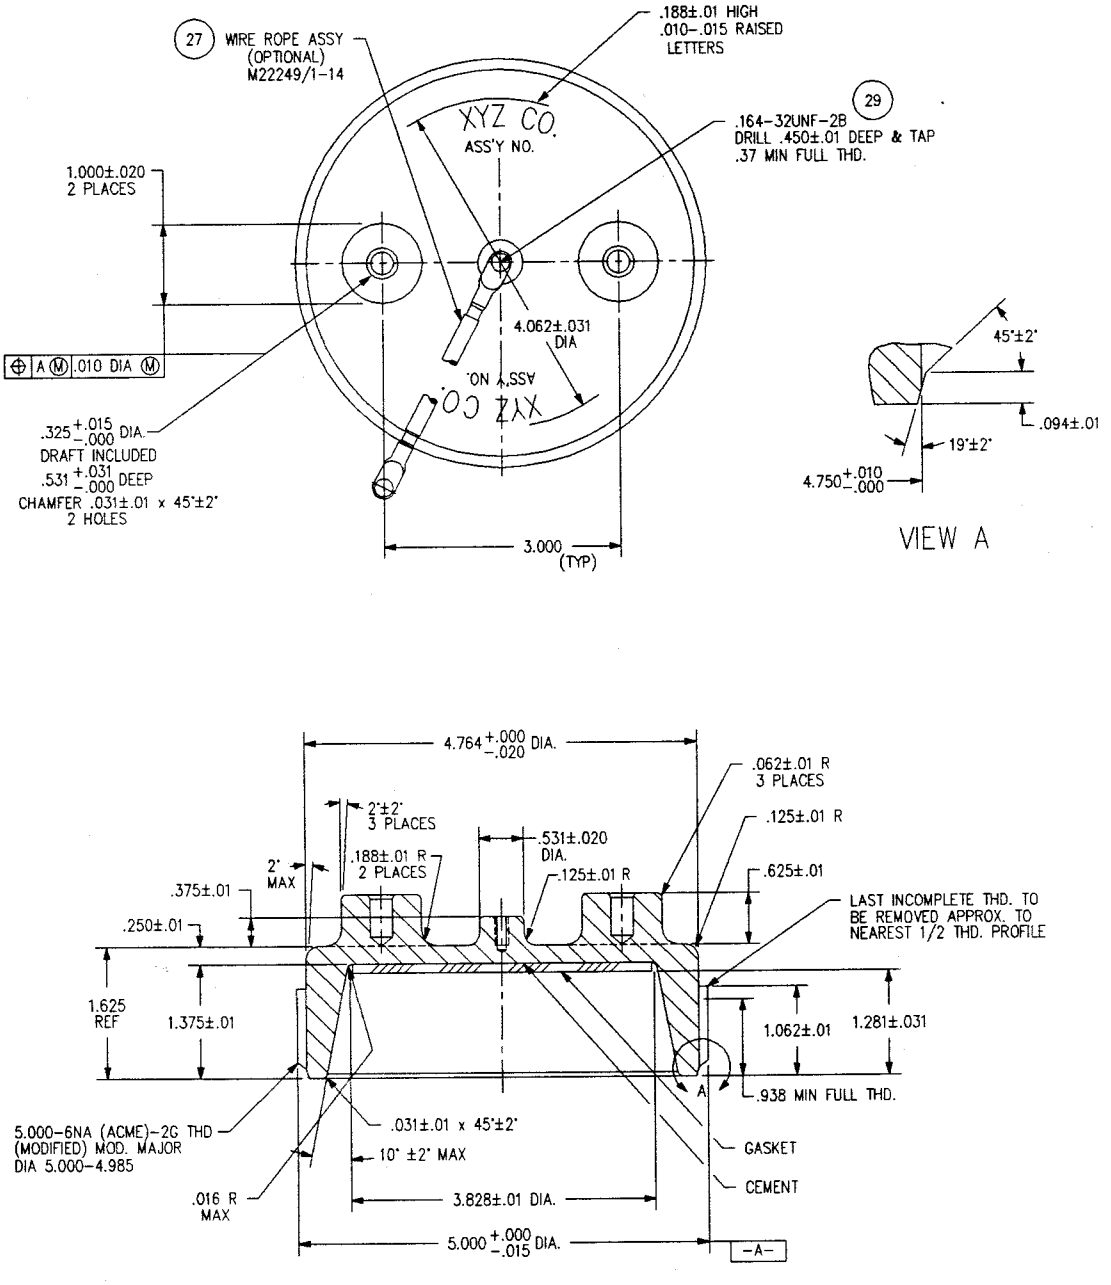


FIGURE 13. Protective cover M22249/4-12. (14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

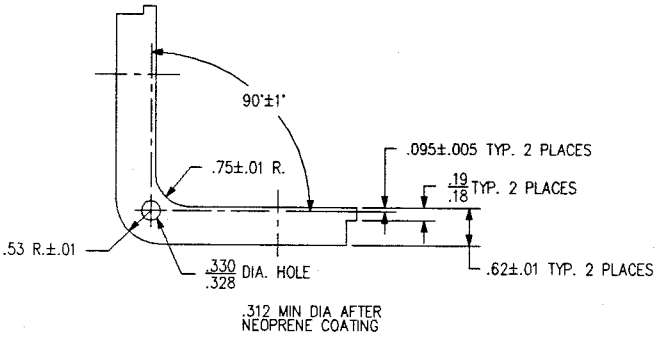

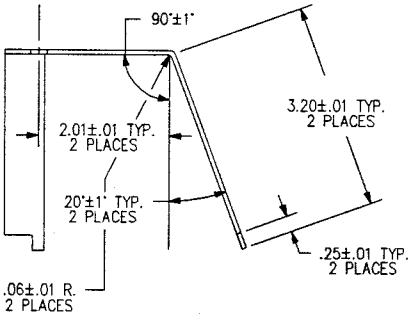

STOCK THK. .0640±.0035

FIGURE 14. Locking clip M22249/4-14. 09

Source: https://assist.dla.mil -- Downloaded: 20261-19T11:34Z
Check the source to verify that this is the current version before use.

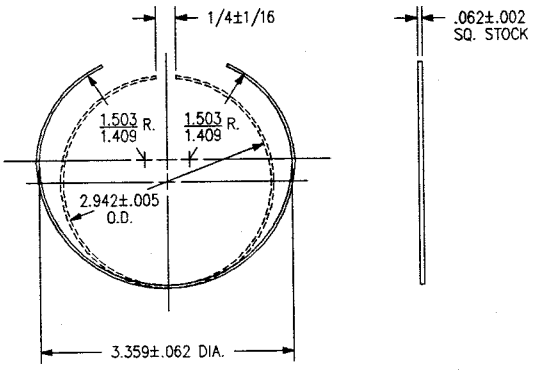


FIGURE 15. Retaining ring M22249/4-13. 13

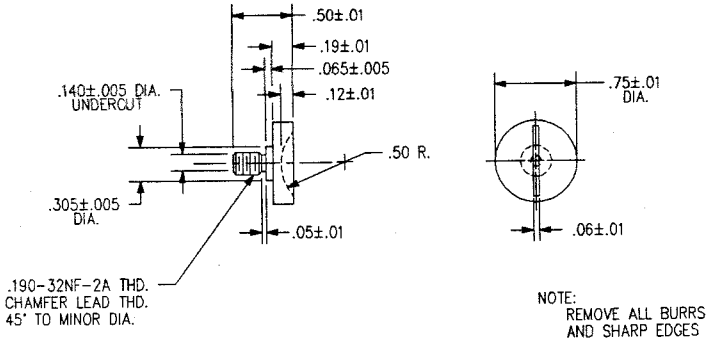


FIGURE 16. Locking clip screw M22249/4-15. 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material Specification	Remarks
01	Plug assembly, 44-pin, compartment side			Figure 1
02	Plug body	1	CRES/Class 316 of QQ-S-763	Figure 2
03	Cover plate	1	CRES/Class 316 of QQ-S-763	Figure 6
04	Screw, .190-32NF-2Ax7/16	3	Nylok M32CRB1032-7P (or equal)	
05	O-ring	1	MS28775-223	
06	Nut, coupling	1	Manganese bronze/Class A of QQ-B-728	Figure 12
07	Washer, thrust	1	CRES/Class 316 of QQ-S-766	Figure 8
08	Retaining ring,	1	Spirolox RST-400 coupling nut (or equal)	
09	Locking clip, coupling nut	1	Beryllium copper of, QQ-C-533[4]	Figure 14
10	Screw, locking clip	1	CRES/Class 302 to 305 of QQ-S-763	Figure 16
11	Insert assembly	1	Diallyl Phthalate	Figure 4
12	O-ring	1	Type GDI-30 of MIL-M-14	MS28775-232
13	Retaining ring, insert assembly	1	MS28775-232 Phosphor bronze of QQ-B-750	Figure 15
14	Cover, protective	1	Aluminum casting material alloy A380, 413 or 384 of QQ-A-591	Figure 13
15	Cable stuffing tube	1	CRES/Class 316 of QQ-S-763	Figure 5
16	Retaining clip, cable stuffing tube	1	CRES/Class 316 of QQ-S-763	Figure 9
17	Screw, .138-32NC-2Ax5/16	2	Nylok M33CRB632-5P (or equal)	
18	O-ring	1	MS28775-222	
19	Grommet, cable	1	Silicone rubber/Class 2b of ZZ-R-765, Shore durometer hardness 40±5	Figure 11
20	Ferrule	1	Polyamide plastic/ L-P-410	Figure 10

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item No.[1]	Description[2]	Qty[3]	Material Specification	Remarks
21	End bell	1	CRES/Class 316 of QQ-S-766	Figure 3
22	Screw, .112-40NC-2Ax1/4	1	Nylok M33CRB440-4P (or equal)	
23	Clamp, cable	2	CRES/Class 316 or QQ-S-763	Figure 7
24	Bolt,.3125-18NC-2Ax1 1/2	2	CRES/Class 302 to 305 QQ-S-763	
25	Nut, .312-18NC-2B	2	Nylok E6CR518P (or equal)	
26	Cover, protective	1	Polyethlene, COML	Figure 1
27[5]	Rope, wire, assembly	1	M22249/1-14	

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quanity is for one complete assembly of each size.
[4]Coated with polychloroprene (neoprene) commercial grade to a 0.003 inch to 0.008 thickness and a durometer hardness of 60 to 70.
[5]Item 27, only when required by acquisition document.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N278-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.