INCH-POUND

MIL-T-55164/25C
21 November 1988

SUPERSEDING
MIL-T-55164/25B
24 September 1976

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 27TB

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal board described herein shall consist of this specification and the latest issue of MIL-T-55164.

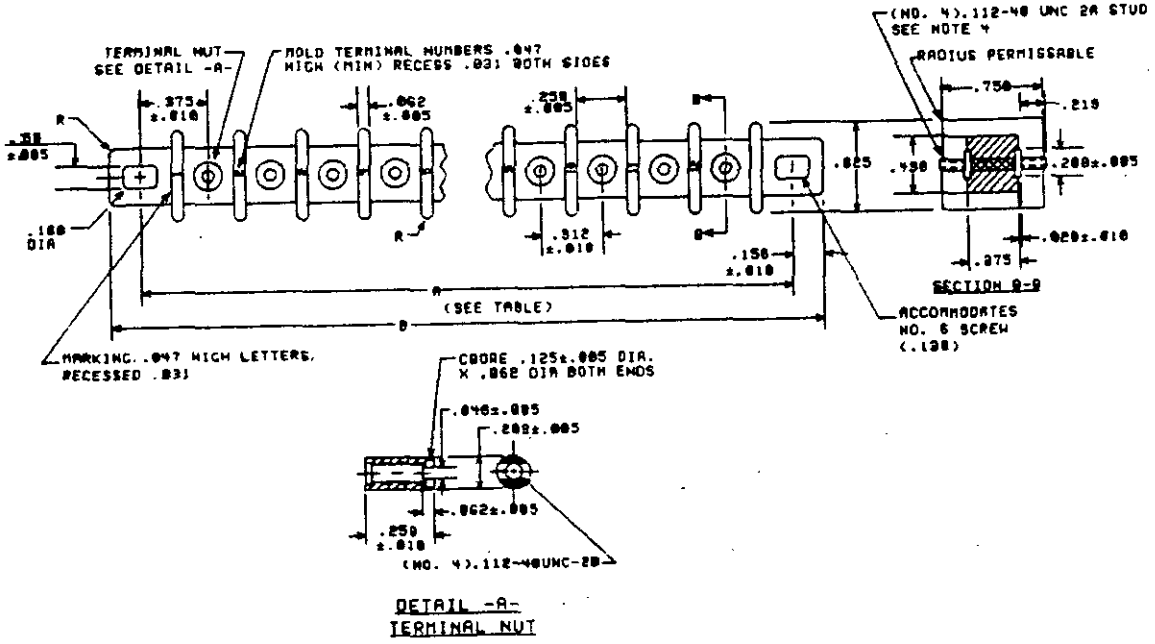


Figure 1. Dimensions and Configuration.

AMSC N/A

FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given general information only.
3. Unless otherwise specified, tolerance is ±0.016 inch.
4. Studs shall be threaded to within 0.046 inch of the stud shoulders.

Table I. - Dimensions.

Type designation 1/	Dimensions				Recommended wire terminal lugs		Terminal nuts required
	A +.031 -.016		B +.031 -.062		MS21004	MS17143	
	inch	(mm)	inch	(mm)			
27TB12_	4.188	(106.38)	4.500	(114.30)	-5 -12 -19	-16 -17 -18	24

1/ Add letter "F" or "H" for temperature range to complete type designation.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table 1.

Voltage rating (maximum): 300 volts.

Current rating: 30 amps.

Maximum number of terminal lugs for each stud:

MS21004-5	3
MS21004-12	3
MS17143-16	3
MS17143-17	3
MS21004-19	2
MS17143-18	2

Studs and nuts for temperature range "H" terminal boards shall be corrosion resistant steel in accordance with class 304 of QQ-S-763.

Plastic material: See table II.

Dielectric withstanding test voltage: 1600 volts rms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

Table II - Plastic material.

Terminal Board Class 1/	Maximum Temperature (°C)	Material	Applicable Specification
F	155	GDI-30F MAI-60	MIL-M-14
H	220	MSI-30	MIL-M-14

1/ Terminal boards of a higher classification may be substituted for a lower temperature classification terminal board.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy -
Air Force - 85

Preparing activity:
Army - ER

(Project 5940-1017-17)

Review activities:
Army - MI
Navy -
Air Force - 99
DLA -GS

User activities:
Army - AV, AT, ME
Navy - MC, AS, SH
Air Force - 11

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:32Z
Check the source to verify that this is the current version before use.