INCH-POUND


FF-C-450/1B
13 July 2017
Superseding
FF-C-450/1A
16 April 2012

FEDERAL SPECIFICATION SHEET

CLAMP, WIRE ROPE, DOUBLE-GRIP, STEEL, DOUBLE SADDLED, TYPE II

The General Services Administration has authorized the use of this federal specification by all federal agencies.

The complete requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue in effect of FF-C-450.

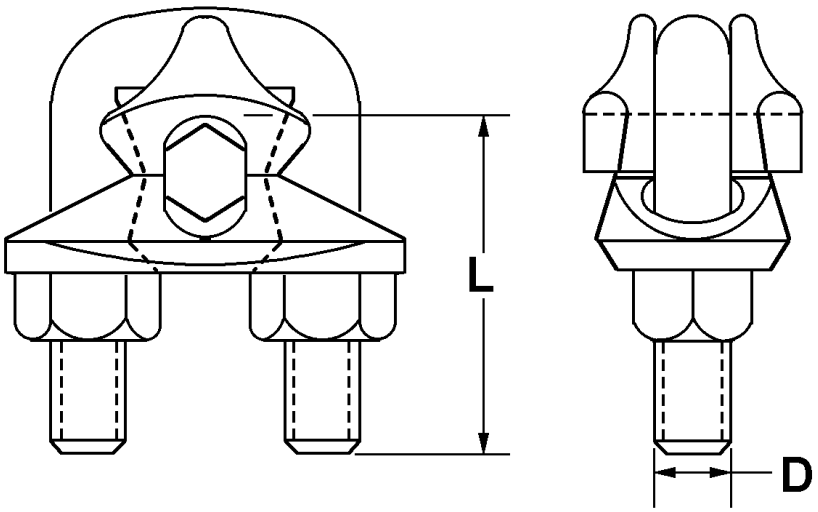

See notes at end of figure.

FIGURE 1. Clamp, double grip double saddled wire rope, type II.

AMSC N/A

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.

Dash number	Wire rope diameter		D Thread minimum		L Length minimum	Weight pounds minimum
-1	3/16	(.1875)	5/16-18	.3125 -18UNC	1.125	.30
-2	1/4	(.250)	3/8-16	.3750 -16UNC	1.313	.32
-3	5/16	(.3125)	3/8-16	.3750 -16UNC	1.500	.44
-4	3/8	(.375)	1/2-13	.5000 -13UNC	1.750	.65
-5	7/16	(.4375)	1/2-13	.5000 -13UNC	1.875	.79
-6	1/2	(.500)	1/2-13	.5000 -13UNC	2.188	.80
-7	9/16	(.5625)	5/8-11	.6250 -11UNC	2.438	1.28
-8	5/8	(.625)	5/8-11	.6250 -11UNC	2.750	1.38
-9	3/4	(.750)	5/8-11	.6250 -11UNC	3.000	1.85
-10	7/8	(.875)	3/4-10	.7500 -10UNC	3.375	2.75
-11	1	(1.00)	3/4-10	.7500 -10UNC	3.625	3.15
-12	1-1/8	(1.125)	3/4-10	.7500 -10UNC	4.000	3.80
-13	1-1/4	(1.250)	7/8-9	.8750 - 9UNC	4.375	5.24
-14	1-3/8	(1.375)	7/8-9	.8750 - 9UNC	4.625	5.58
-15	1-1/2	(1.500)	1.0-8	1.000 - 8UNC	5.125	7.44
-16	1-3/4	(1.750)	1-1/8-7	1.125 - 7UNC	6.000	10.02
-17	2	(2.000)	1-1/4-7	1.250 - 7UNC	6.000	13.00

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.1875	4.76	.500	12.70	1.000	25.40	1.500	38.10	2.438	61.93	4.000	101.60
.250	6.35	.5625	14.29	1.125	28.58	1.750	44.45	2.750	69.85	4.375	111.13
.3125	7.94	.625	15.88	1.250	31.75	1.875	47.63	3.000	76.2	4.625	117.48
.375	9.53	.750	19.05	1.313	33.35	2.000	50.80	3.375	85.73	5.125	130.18
.4375	11.11	.875	22.23	1.375	34.93	2.188	55.58	3.625	92.08	6.000	152.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All dimensions are “reference” dimensions.

FIGURE 1. Clamp, double grip double saddled wire rope, type II - Continued.

REQUIREMENTS:

Clamps shall be in accordance with figure 1 and table I.

Material carbon steel shall be in accordance with FF-C-450, type I, class I.

Threads shall be in accordance with FF-C-450.

Marking shall be in accordance with FF-C-450.


Finish and finish designators see table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.

TABLE I. Finish and finish designator.

Finish designator	Finish
A	Protective coating shall be any of the following; mechanically deposited zinc coating in accordance with ASTM-B695, class 50, type II (colored chromate), or zinc coated (hot dip galvanized) in accordance with ASTM-A153/A153M or zinc coated (electrodeposited) in accordance with ASTM-B633, Fe/Zn 5, type VI.
C	Cadmium plated, in accordance with SAE AMS-QQ-P-416, type II, class 3 (protects to 96 hours in salt spray when tested in accordance with ASTM-B117).
Z1	Zinc coating, hot-dip, in accordance with ASTM-A153/A153M.
Z2	Zinc coating (electrodeposited) in accordance with ASTM-B633, Fe/Zn 5, type VI. (protects to120 hours in salt spray when tested in accordance with ASTM-B117).
Z3	Zinc coating, mechanically deposited, in accordance with ASTM-B695, class 50, type II (hexavalent chromium).
Z4	Zinc coating, mechanically deposited, in accordance with ASTM-B695, class 50, type I (protects to 300 hours (red rust) in salt spray when tested in accordance with ASTM-B117).
Z5	Zinc flake coating flZn/nc/TL/960h/x in accordance with ISO 10683 (protects to 960 hours in salt spray when tested in accordance with ASTM-B117).

Part or Identifying Number (PIN), example:

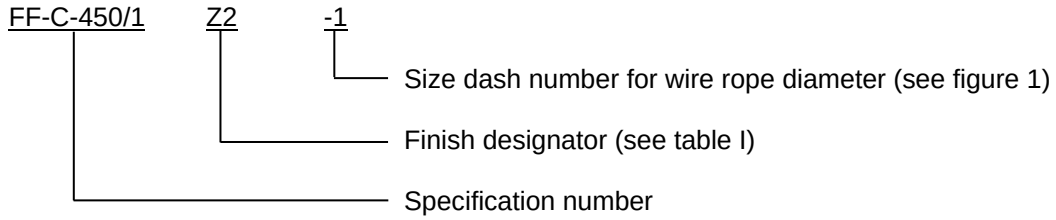

Cadmium and chromate type II, which uses a hexavalent chromium, is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium or chromate type II plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Class I and II ozone depleting substances (ODS) shall not be used in FF-C-450/1 or any referenced procedures.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

For superseded PIN's see table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.

TABLE II. Superseded PIN's.

Use	Superseded
FF-C-450/1A-1	FF-C-450/1-1
FF-C-450/1A-2	FF-C-450/1-2
FF-C-450/1A-3	FF-C-450/1-3
FF-C-450/1A-4	FF-C-450/1-4
FF-C-450/1A-5	FF-C-450/1-5
FF-C-450/1A-6	FF-C-450/1-6
FF-C-450/1A-7	FF-C-450/1-7
FF-C-450/1A-8	FF-C-450/1-8
FF-C-450/1A-9	FF-C-450/1-9

Use	Superseded
FF-C-450/1A-10	FF-C-450/1-10
FF-C-450/1A-11	FF-C-450/1-11
FF-C-450/1A-12	FF-C-450/1-12
FF-C-450/1A-13	FF-C-450/1-13
FF-C-450/1A-14	FF-C-450/1-14
FF-C-450/1A-15	FF-C-450/1-15
FF-C-450/1A-16	FF-C-450/1-16
FF-C-450/1A-17	FF-C-450/1-17

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to FF-C-450, this document references the following:

ASTM-A153/A153M
ASTM-B117
ASTM-B633
ASTM-B695
ISO 10683
SAE AMS-QQ-P-416

CONCLUDING MATERIAL

MILITARY INTERESTS:

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Army - AT, AV, CR4, GL
Navy - MC, SA, YD
Air Force - 71

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSA

Preparing activity:
DLA - CC

DOD Project 4030-2017-003

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.