
FED. SUP CLASS
2530

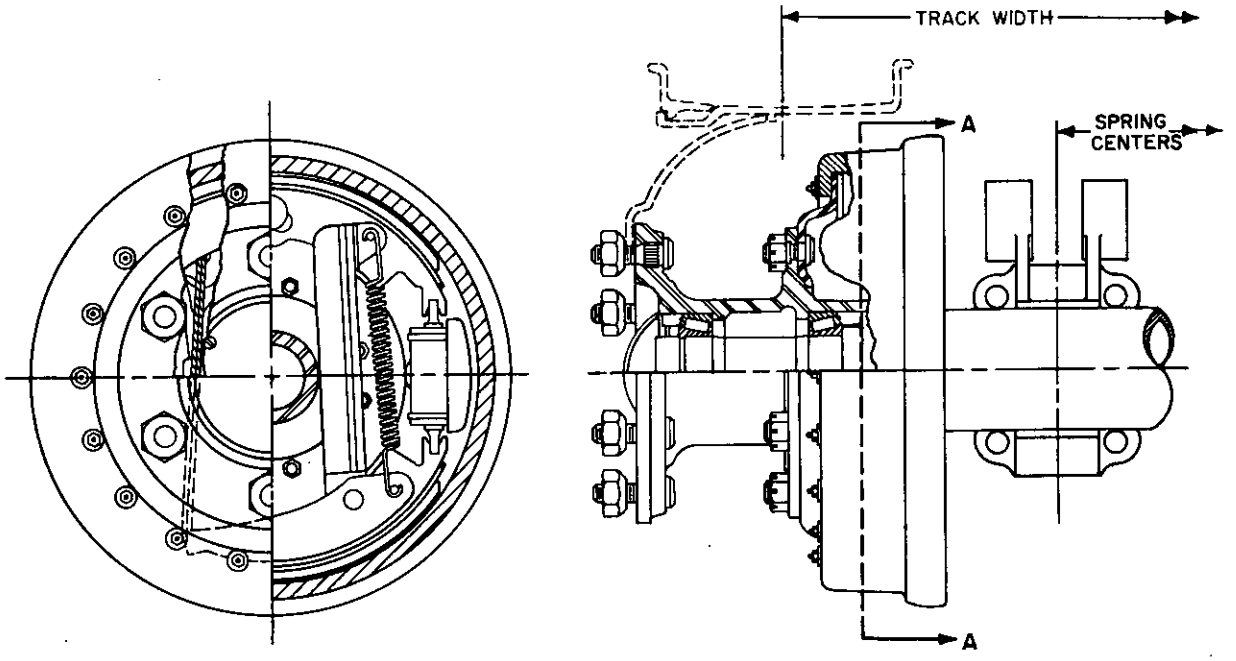

SECTION A-A

TYPE 'A'

NOTES:

1. LOAD SHALL BE LIMITED BY TIRE, AXLE, OR SPRING CAPACITY.
2. WHEELS AND TIRES ARE NOT PART OF AXLE ASSEMBLY AND ARE SHOWN FOR INFORMATION ONLY.
3. DIMENSIONS SHOWN ARE IN INCHES AND ARE FOR ENGINEERING REFERENCE ONLY.
4. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT ...ENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF ... REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY ... ISSUE ADOPTED.
7. MARKING SHALL CONSIST OF THE MS PART ... IN ACCORDANCE WITH MIL-STD-130.
8. DETAILS OF THIS ... REFERENCED DRAWINGS, WHICH MAY BE OBTAINED FROM U.S. ... COMMAND, WARREN, MICHIGAN 48090.

(E) CANCELLED AFTER 7 JUNE 1982. NO SUPERSEDING STANDARD.

APPROVED 25 FEBRUARY 1958 REVISED (A) 12 JULY 1963 (B) 21 DECEMBER 1966 (C) 22 NOV 1972 (D) 20 OCTOBER 1976 (E) 7 JUN 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for ... new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust	TITLE AXLE, VEHICULAR, NON – DRIVING, SINGLE FOR TACTICAL WHEELED VEHICLES	MILITARY STANDARD MS35865
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 8

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

MS PART NO.	MS 35865-A1	MS 35865-A2	MS 35865-A3	MS 35865-A4	MS 35865-A5
AXLE ASSEMBLY	8723952	8719916	7263711	8741430	8742434
SUSPENSION INSTALLATION	7979591	7979591	—	—	—
TUBE ASSEMBLY - AXLE	8723953	8719912	7263713	8741429	8742419
BRAKE ASSEMBLY L.H.	8336701	8336701	8336701	8336701	8723800
BRAKE ASSEMBLY R.H.	8336702	8336702	8336702	8336702	8723801
BRAKE SIZE	15X3	15X3	15X3	15X3	15X3
HUB & DRUM ASSEMBLY L.H.	—	—	—	—	—
HUB & DRUM ASSEMBLY R.H.	—	—	—	—	—
HUB	8719915	8719915	7263712	8719915	8719915
DRUM	7411425	7411425	7411425	7411425	7411425
ADAPTER	7413231	7413231	7413231	7413231	7413231
WHEEL BEARINGS (INNER)	MS 19081-112	MS 19081-112	MS 19081-112	MS 19081-112	MS 19081-112
WHEEL BEARINGS (OUTER)	MS19081-112	MS 19081-112	MS 19081-112	MS 19081-112	MS 19081-112
TECHNICAL DATA AND RELATED PARTS					
WHEELS, P/N	MS 53044-5	MS 53044-4	MS53044-5	MS 53044-5	MS53044-5
WHEELS, SINGLE OR DUAL	SINGLE	SINGLE	DUAL	SINGLE	SINGLE
TIRE, P/N	MS35388-16	MS35388-21	MS 35388-16	MS35388-21	MS35388-17
TIRE SIZE	9.00 X 20	11.00 X 20	9.00 X 20	11.00 X 20	9.00 X 20
TUBE, P/N	MS 35392-13	MS 35392-15	MS 35392-13	MS 35392-15	MS 35392-13
TRACK WIDTH	67 3/8	72	70	80	80
SPRING CENTERS	40	44 3/16	41	58 1/4	55
SPRING SEATS UP OR DOWN	UP	UP	DOWN	UP	UP
SPRINGS, MAIN	7368628	7368628	7392819	8407254	8758893
SPRINGS, AUXILIARY	7411042	7411042	NONE	NONE	NONE
LOAD BEARING CAPACITY (LBS)	10000 LBS	10000 LBS	10000 LBS	10000 LBS	10000 LBS

APPROVED 25 FEBRUARY 1958 REVISED

FED. SUP CLASS 2530

MILITARY STANDARD

MS 35865

SHEET 2 OF 8

TITLE: AXLE, VEHICULAR, NON-DRIVING, SINGLE FOR TACTICAL WHEELED VEHICLES

SUPERSEDES:

PROCUREMENT SPECIFICATION

P.A. Other Cust

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2530

MS PART NO.	MS 35865-A6	MS 35865-A7	MS 35865-A8	MS 35865-A9	MS35865-A10
AXLE ASSEMBLY	7059199	10950500	10950500	8363956	10910870
SUSPENSION INSTALLATION	10929851	10950643	10950616	10891264	10910889
TUBE ASSEMBLY - AXLE	7059176	10950501	10950501	8363957	10910871
BRAKE ASSEMBLY L.H.	8336701	8723800	8723800	8723800	8336701
BRAKE ASSEMBLY R.H.	8336702	8723801	8723801	8723801	8336702
BRAKE SIZE	15 X 3	15 X 3	15 X 3	15 X 3	15 X 3
HUB & DRUM ASSEMBLY L.H.	—	—	—	—	—
HUB & DRUM ASSEMBLY R.H.	—	—	—	—	—
HUB	8719915	8719915	8719915	8719915	8719915
DRUM	7411425	7411425	7411425	7411425	7411425
ADAPTER	7413231	7413231	7413231	7413231	7413231
WHEEL BEARINGS (INNER)	MS 19081-112	MS 19081-112	MS 19081-112	MS 19081-112	MS 19081-112
WHEEL BEARINGS (OUTER)	MS 19081-112	MS 19081-112	MS 19081-112	MS 19081-112	MS 19081-112
TECHNICAL DATA AND RELATED PARTS					
WHEELS, P/N	MS 53044-5	MS 53044-5	MS 53044-5	MS 53044-5	MS 53044-5
WHEELS, SINGLE OR DUAL	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
TIRES, P/N	MS 35388-16	MS 35388-21	MS 35388-16	MS 35388-16	MS 35388-16
TIRE SIZE	9.00X20	11.00X20	9.00X20	9.00X20	9.00X20
TUBE, P/N	MS 35392-13	MS 35392-15	MS 35392-13	MS 35392-13	MS35392-13
TRACK WIDTH	67 3/8	80	80	80	80
SPRING CENTERS	41	52	52	52	61 1/8
SPRING SEATS UP OR DOWN	UP	DOWN	DOWN	UP	DOWN
SPRINGS, MAIN	8389626	7974914	8363955	8363955	8363955
SPRINGS, AUXILIARY	NONE	NONE	NONE	NONE	NONE
LOAD BEARING CAPACITY (LBS)	10000 (LBS)	10000 (LBS)	10000 (LBS)	10000 (LBS)	10000 (LBS)

APPROVED 25 FEBRUARY 1958 REVISED

P.A.
Other Cust.

TITLE
AXLE, VEHICULAR
NON-DRIVING, SINGLE
FOR TACTICAL WHEELED VEHICLES

MILITARY STANDARD
MS 35865

PROCUREMENT SPECIFICATION

SUPERSEDES:


SHEET 3 OF 8

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2530

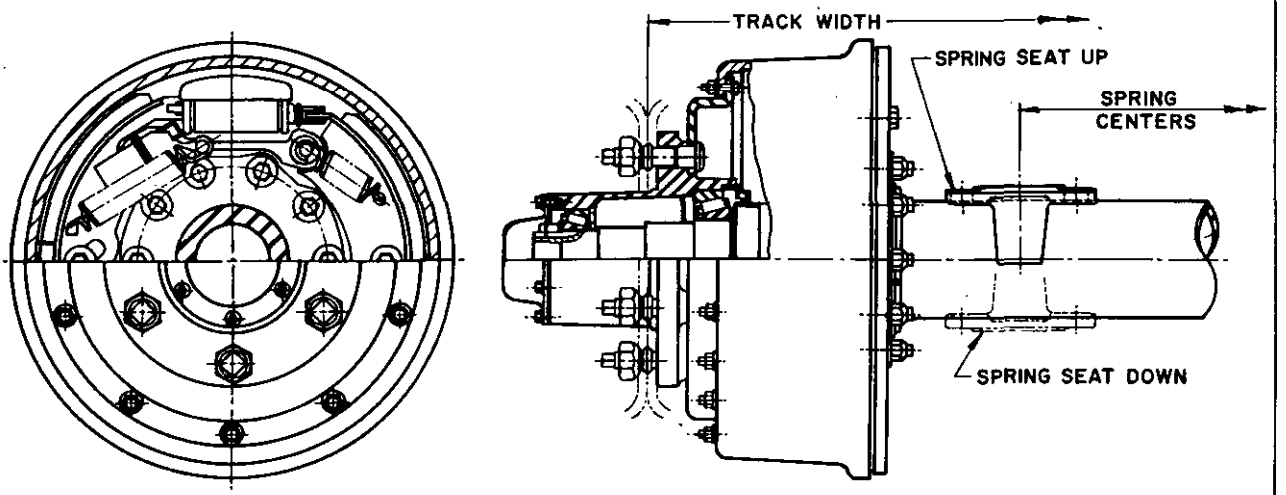

TYPE 'B'

MS PART NO.	MS35865-B1	MS35865-B2	MS35865-B3	MS35865-B4	MS35865-B5
AXLE ASSEMBLY	8710735	8737156	8710735-1	8710735-1	8710735
SUSPENSION INSTALLATION	10891386	7974027	7034068	10882248	10882248-1
TUBE ASSEMBLY - AXLE	8710746	8737155	8710746	8710746	8710746
BRAKE ASSEMBLY L.H.	8710719	8710719	8710719	8710719	8710719
BRAKE ASSEMBLY R.H.	8710720	8710720	8710720	8710720	8710720
BRAKE SIZE	16 1/2 X 5 1/2	16 1/2 X 5 1/2	16 1/2 X 5 1/2	16 1/2 X 5 1/2	16 1/2 X 5 1/2
HUB & DRUM ASSEMBLY L.H.	8710740	8710740	8710740	8710740	8710740
HUB & DRUM ASSEMBLY R.H.	8710741	8710741	8710741	8710741	8710741
HUB	8710736	8710736	8710736	8710736	8710736
DRUM	7979233	7979233	7979233	7979233	7979233
ADAPTER	8710742	8710742	8710742	8710742	8710742
WHEEL BEARINGS (INNER)	MS19081-182	MS19081-182	MS19081-182	MS19081-182	MS19081-182
WHEEL BEARINGS (OUTER)	MS19081-112	MS19081-112	MS19081-112	MS19081-112	MS19081-112
TECHNICAL DATA AND RELATED PARTS					
WHEELS, P/N	MS 53044-5	MS 53044-5	MS 53044-5	MS 53044-5	MS 53044-5
WHEELS, DUAL OR SINGLE	DUAL	DUAL	DUAL	DUAL	DUAL
TIRES, P/N	MS 35388-16	MS 35388-16	MS 35388-16	MS 35388-16	MS 35388-16
TIRE SIZE	9.00X20	9.00X20	9.00X20	9.00X20	9.00X20
TUBE, P/N	MS 35392-13	MS 35392-13	MS 35392-13	MS 35392-13	MS 35392-13
TRACK WIDTH	70	70	70	70	70
SPRING CENTERS	40	40	40	40	40
SPRING SEATS UP OR DOWN	UP	DOWN	UP	UP	UP
SPRINGS, MAIN	7974914	8737008	7974914	10891521	7974914
SPRINGS, AUXILIARY	NONE	NONE	NONE	NONE	NONE
LOAD BEARING CAPACITY	14000 (LBS)	14000 (LBS)	14000 (LBS)	14000 (LBS)	14000 (LBS)


APPROVED 25 FEBRUARY 1958 REVISED

P.A. Other Cust	TITLE AXLE, VEHICULAR, NON—DRIVING, SINGLE FOR TACTICAL WHEELED VEHICLES	MILITARY STANDARD MS 35865
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 4 OF 8

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-02-23T17:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2530

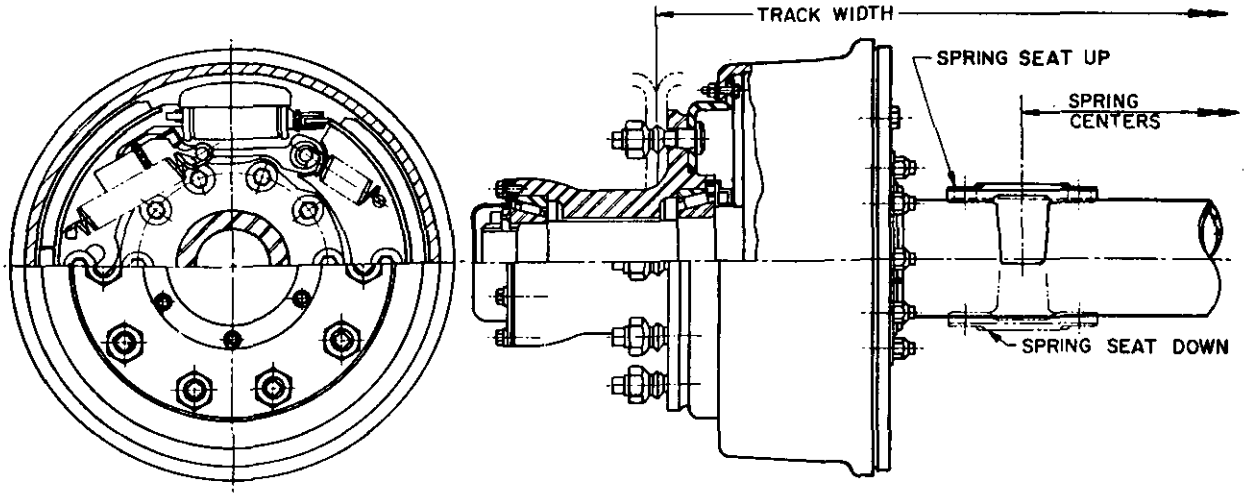

TYPE 'C'


MS PART NO.	MS 35865-C1	MS35865-C2	MS35865-C3	MS35865-C4
AXLE ASSEMBLY	8689798	8710738	8710739	8710727
SUSPENSION INSTALLATION	10888838	8733831	8733831	8710734
TUBE ASSEMBLY - AXLE	8689797	8710702	8710702	8710737
BRAKE ASSEMBLY L.H.	8710719	8710719	8710719	8710719
BRAKE ASSEMBLY R.H.	8710720	8710720	8710720	8710720
BRAKE SIZE	16 1/2 X 5 1/2	16 1/2 X 5 1/2	16 1/2 X 5 1/2	16 1/2 X 5 1/2
HUB & DRUM ASSEMBLY L.H.	8710721	8710721	8710721	8710721
HUB & DRUM ASSEMBLY R.H.	8710722	8710722	8710722	8710722
HUB	8710723	8710723	8710723	8710723
DRUM	7979233	7979233	7979233	7979233
ADAPTER	8710724	8710724	8710724	8710724
WHEEL BEARINGS (INNER)	MS19081-182	MS19081-182	MS19081-182	MS19081-182
WHEEL BEARINGS (OUTER)	MS19081-181	MS19081-181	MS19081-181	MS19081-181
TECHNICAL DATA AND RELATED PARTS				
WHEELS, P/N	MS53044-6	MS 53044-6	MS53044-6	MS53044-6
WHEELS, SINGLE OR DUAL	DUAL	DUAL	DUAL	DUAL
TIRES, P/N	MS35388-21	MS35388-21	MS35388-21	MS35388-21
TIRE SIZE	11.00 X 20	11.00 X 20	11.00 X 20	11.00 X 20
TUBE, P/N	MS35392-15	MS35392-15	MS35392-15	MS35392-15
TRACK WIDTH	72	72	72	72
SPRING CENTERS	40	34	34	39 3/4
SPRING SEATS UP OR DOWN	UP	UP	UP	UP
SPRINGS, MAIN	7974914	8733785	8733785	7979217
SPRINGS, AUXILIARY	NONE	NONE	NONE	NONE
LOAD BEARING CAPACITY	18000 (LBS)	18000 (LBS)	18000 (LBS)	18000 (LBS)

APPROVED 25 FEBRUARY 1958 REVISED

P.A. Other Cust.	TITLE AXLE, VEHICULAR, NON — DRIVING, SINGLE FOR TACTICAL WHEELED VEHICLES	MILITARY STANDARD MS 35865
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 5 OF 8

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

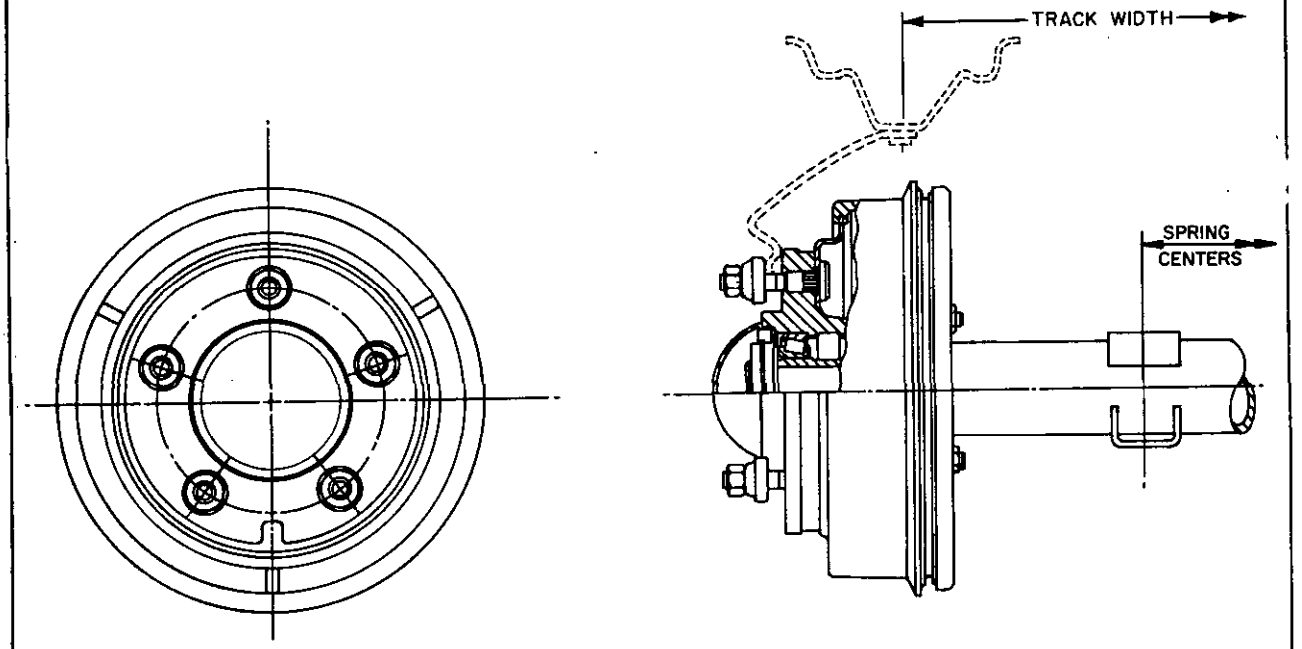

TYPE 'D'


MS PART NO.	MS35865-D1	MS 35865 - D2
AXLE ASSEMBLY	10924598	10926059
SUSPENSION INSTALLATION	10924574	—
TUBE ASSEMBLY - AXLE	10924599	10919707
BRAKE ASSEMBLY L.H.	8678952	10911039
BRAKE ASSEMBLY R.H.	8678953	10911040
BRAKE SIZE	9 X2	14X2
HUB & DRUM ASSEMBLY L.H.	10924600	7410356
HUB & DRUM ASSEMBLY R.H.	10924600	7410357
HUB	10924604	5599887
DRUM	10924605	5599867
ADAPTER	10924605	7064474
WHEEL BEARINGS (INNER)	MS 19081 - 59	MS19081-179
WHEEL BEARINGS (OUTER)	MS 19081 - 59	MS 19081 - 78
TECHNICAL DATA AND RELATED PARTS		
WHEELS , P/N	10921860	MS 53044 - 2
WHEELS , SINGLE OR DUAL	SINGLE	SINGLE
TIRES , P/N	MS 35388 - 93	MS 35388 - 11
TIRE SIZE	7.00X16	9.00X16
TUBE	MS 35392 - 8	MS 35392 - 10
TRACK WIDTH	53	62
SPRING CENTERS	39 1/8	43 7/32
SPRING SEATS UP OR DOWN	DOWN	UP
SPRINGS , MAIN	7328358	7339463
SPRINGS , AUXILIARY	NONE	NONE
LOAD BEARING CAPACITY	2500 (LBS)	5000 (LBS)


APPROVED 25 FEBRUARY 1958 REVISED

P.A. Other Cust	TITLE AXLE, VEHICULAR, NON — DRIVING, SINGLE FOR TACTICAL WHEELED VEHICLES	MILITARY STANDARD MS 35865
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 6 OF 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2530

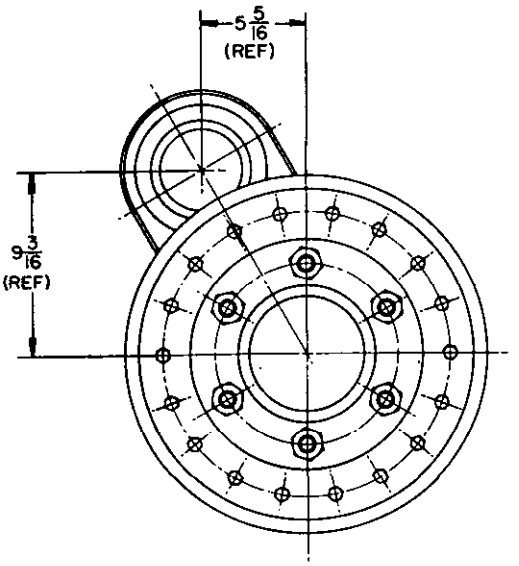

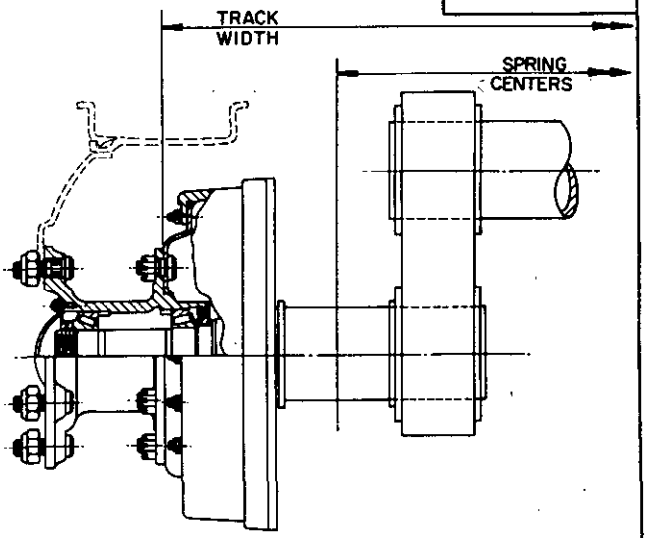

TYPE 'E'

INACTIVE FOR NEW DESIGN AFTER 12 JULY 1963.
AUTHORIZED FOR PROCUREMENT, ONLY TO SUPPORT
IN-SERVICE MATERIAL. REF 7361595

MS PART NO.	MS 35865-E1	MS 35865-E2
AXLE ASSEMBLY	10893138	7361595
SUSPENSION INSTALLATION	—	—
TUBE ASSEMBLY — AXLE	10893139	7361596
BRAKE ASSEMBLY L.H.	8336701	8723800
BRAKE ASSEMBLY R.H.	8336702	8723801
BRAKE SIZE	15X3	15X3
HUB & DRUM ASSEMBLY L.H.	—	7361613
HUB & DRUM ASSEMBLY R.H.	—	7361614
HUB	8719915	8719915
DRUM	7411425	7411425
ADAPTER	7413231	7413231
WHEEL BEARINGS (INNER)	MS 19081-112	MS 19081-112
WHEEL BEARINGS (OUTER)	MS 19081-112	MS 19081-112
TECHNICAL DATA AND RELATED PARTS		
WHEELS, P/N	MS53044-4	MS 53044-4
WHEELS, SINGLE OR DUAL	SINGLE	SINGLE
TIRES, P/N	MS 35388-21	MS35388-21
TIRE SIZE	11.00X20	11.00X20
TUBE	MS35392-15	MS35392-15
TRACK WIDTH	81 5/8	76 1/4
SPRING CENTERS	64 11/32	51
SPRING SEATS UP OR DOWN	DOWN	UP
SPRINGS, MAIN	10893119-1	7365654
SPRINGS, AUXILIARY	NONE	7520548
*LOAD BEARING CAPACITY	10000 (LBS)	10000 (LBS)

APPROVED 25 FEBRUARY 1958 REVISED

P.A.
Other Cust.

TITLE
AXLE, VEHICULAR,
NON — DRIVING, SINGLE
FOR TACTICAL WHEELED VEHICLES

MILITARY STANDARD
MS 35865

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 7 OF 8

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:29Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. Other Cust

PROCUREMENT SPECIFICATION

SUPERSEDES:

TITLE

AXLE, VEHICULAR, NON DRIVING, SINGLE FOR TACTICAL WHEELED VEHICLES


MILITARY STANDARD

MS 35865

SHEET 8 OF 8

FED. SUP CLASS 2530

DD FORM 1 SEP 67 672-1 (Coordinated)

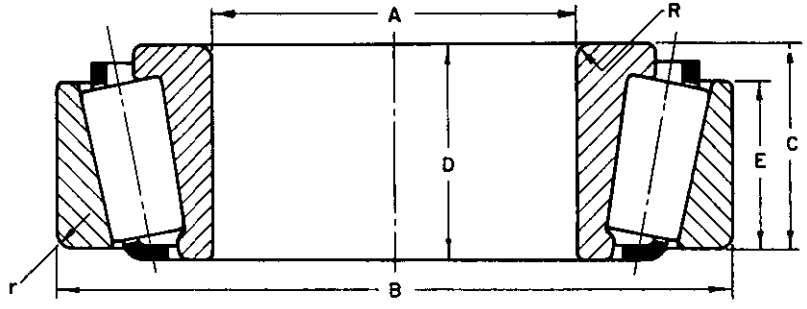

AXLE BEARING DATA											NON DRIVING AXLE-CAPACITY (LBS)											
	REF. MILITARY PART NUMBER			A	B	C	D	E	R	r	2500		5000		10000		14000		18000			
REFERENCE MS NUMBER	ASSEMBLY	CONE	CUP	INSIDE DIA.	OUTSIDE DIA.	BEARING WIDTH	CONE WIDTH	CUP WIDTH	CONE RADIUS	CUP RADIUS	OUTER	INNER	OUTER	INNER	OUTER	INNER	OUTER	INNER	OUTER	INNER		
MS 19081-59	N/R	7536131	7536132	1.6250	2.8910	.7700	.7800	.5800	.14	.03	✓	✓										
MS19081-78	703103	705277	706751	1.8125	3.3464	1.0000	1.0082	.8125	.14	.05			✓									
MS19081-179	703229	705472	706873	2.2500	3.8437	.9688	.9688	.7656	.14	.03				✓								
MS19081-112	703116	705322	706771	2.6250	4.4375	1.1875	1.1830	.9375	.14	.13					✓	✓	✓					
MS19081-181	703077	705155	706691	3.3750	6.0000	1.5625	1.4300	1.1875	.14	.13									✓			
MS19081-182	712288	712286	706691	3.5000	6.0000	1.5625	1.4300	1.1875	.25	.13								✓		✓		

NOTE: BEARING ASSEMBLIES MUST HAVE CUPS AND CONES MATCHED BY PART NUMBER AND MANUFACTURER.

APPROVED 27 FEBRUARY 1958 REVISED

Source: https://assist.dla.mil -- Downloaded: 2020-02-23T19:29Z
Check the source to verify that this is the current version before use.