MIL-D-52353A(ME)
12 December 1975
SUPERSEDING
MIL-D-52353(MO)
19 March 1964

MILITARY SPECIFICATION

DRIFTPINS: STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers steel driftpins for alining structural members during the erection of riveted or bolted structures.

1.2 Classification. The driftpins shall be furnished in the following sizes, as specified (see 6.2):

Size 1 - 0.688 inch diameter by 6 inches long.
Size 2 - 0.812 inch diameter by 5 inches long.
Size 3 - 0.938 inch diameter by 6 inches long.
Size 4 - 1.062 inch diameter by 6 inches long.
Size 5 - 1.188 inch diameter by 9 inches long.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-P-40 - Packaging and Packing of Hand Tools.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	- Identification Marking of US Military Property.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI 1080.

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

B46.1 - Surface Texture.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

E 18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The driftpins shall be as shown in Figure 1 and as specified herein. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer.

3.2 First article (first-produced driftpin). The supplier shall furnish one or more driftpins as specified (see 6.2) for examination and testing within the time frame specified (see 6.2) to prove that his production methods will produce driftpins that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. The driftpins shall be steel conforming to AISI 1080.

3.3.1 Hardness. The driftpins shall be heat treated to a hardness of between 43 and 47 on the Rockwell C scale.

3.3.2 Surface roughness. The driftpins shall have surface roughness of not more than 125 microinches. Surface roughness measurement shall be determined in accordance with ANSI B46.1.

3.4 Identification marking. The driftpins shall be identified in accordance with MIL-STD-130.

3.5 Workmanship. The driftpins shall be free of burrs and rough edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) First-produced driftpin inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 First-produced driftpin inspection.

4.3.1 Examination. The first-produced driftpin shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Test. The first-produced driftpin shall be tested as specified in 4.5.2. Failure of the test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Lot. For the purpose of inspection, a lot of driftpins shall consist of all the units of one size offered to the Government at one time.

4.4.2 Sampling. Sampling for examination and test shall be in accordance with MIL-STD-105, Inspection Level S4.

4.4.3 Examination.

4.4.3.1 Samples. Samples selected in accordance with 4.4.2 shall be examined for the major defects specified in 4.5.1. AQL shall be 2.5 percent defective.

4.4.4 Test.

4.4.4.1 Samples. Samples selected in accordance with 4.4.2 shall be tested as specified in 4.5.2. AQL shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The driftpins shall be examined as specified herein for the following major defects:

101. Dimensions not as specified.
102. Material not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the currentversion before use.

103. Surface roughness not within the limits specified.
104. Identification marking not as specified.
105. Workmanship not as specified.

4.5.2 Test. The driftpins shall be tested for hardness in accordance with ASTM E 18. Nonconformance to 3.3.1 shall constitute failure of this test.

4.6 Inspection of preparation for delivery. The preservation, packaging, packing, and marking of the driftpins shall be examined to determine compliance with the quality conformance inspection requirements of PPP-P-40.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. The driftpins shall be preserved, packaged, packed, and marked in accordance with PPP-P-40. Preservation and packaging shall be Level A or C, and packing shall be Level A, B, or C, as specified (see 6.2).

6. NOTES

6.1 Intended use. The driftpins are intended for use in alining holes in structural members, thus permitting easy insertion of rivets and bolts during erection of riveted and bolted steel structures.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size of driftpins required (see 1.2).
(c) Time frame required for submission of first-produced driftpins, and number of driftpins required (see 3.2).
(d) Level of preservation and packaging and level of packing required (see 5.1).

6.3 First-produced driftpins. Any changes or deviations of production driftpins from the approved first-produced driftpin during production will be subject to the approval of the contracting officer. Approval of the first-produced driftpin will not relieve the supplier of his obligation to furnish driftpins conforming to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

Custodian:

Army - ME

Review activity:


Army - GL

Preparing activity:

Army - ME

Project No. 5120-A838

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

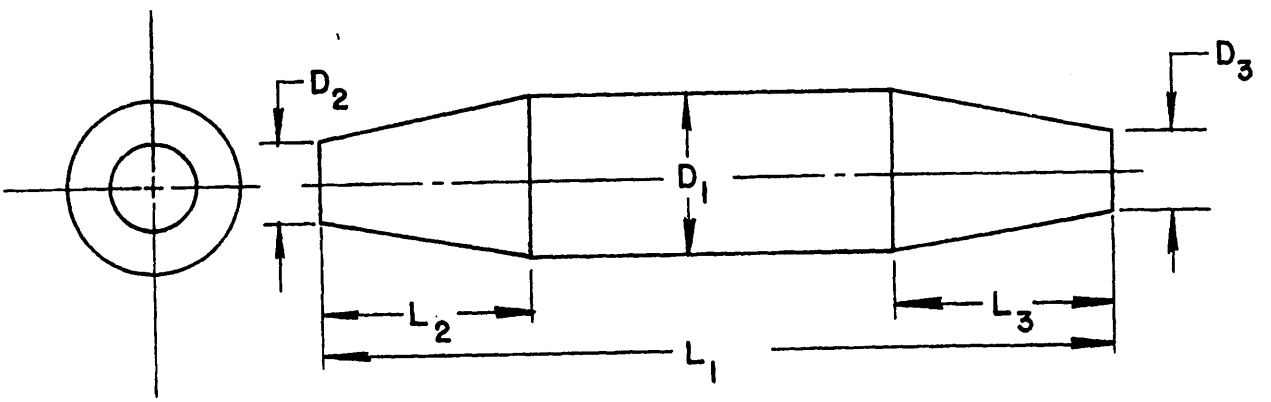

SIZE	D_1 +.000 -.008	D_2 ±.015	D_3 ±.015	L_1 ±.125	L_2 ±.062	L_3 ±.062
1.	0.688	0.375	0.375	6.000	1.500	1.500
2.	0.812	0.438	0.438	5.000	1.375	1.375
3.	0.938	0.438	0.438	6.000	1.500	1.500
4.	1.062	0.562	0.562	6.000	1.625	1.625
5.	1.188	0.562	0.812	9.000	2.375	1.625

NOTES:
1. ALL DIMENSIONS ARE IN INCHES

FIGURE 1. DRIFTPIN

X-3051

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the currenversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-D-52353A(ME) Driftpins: Steel

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Center
ATTN: AMXFB-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.