MIL-S-43538

13 September 1967

MILITARY SPECIFICATION

STAND, BIBLE AND MISSAL

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers one type and size Bible and Missal stand.

1.2 Classification.- The Bible and Missal stand shall have one of the following finishes, as specified (see 6.2):

Finish 1 - Polished Brass
Finish 2 - Chromium Plated

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-C-320 - Chromium Plating (Electrodeposited).
PPP-B-636 - Box, Fiberboard.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

DRAWINGS

ARMY NATICK LABORATORIES

14-1-59 - Stand, Bible and Missal, Altar, Chapel; Assembly
14-1-60 - Stand, Bible and Missal, Altar, Chapel; Fram Assembly
14-1-61 - Stand, Bible and Missal, Altar, Chapel; Reading Table Assembly
14-1-62 - Stand, Bible and Missal, Altar, Chapel; Details

FSC 9925

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

(Miniature copies of Drawings 14-1-59 thru 14-1-62 inclusive, identified as figures 1 thru 4, are attached for information purposes only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample.- When specified (see 6.2) before production is commenced, a sample Bible and Missal stand covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.- Materials specified shall conform to the applicable drawings and requirements specified herein. Materials not definitely specified shall be of the quality normally used for the purpose in commercial practice.

3.3 Construction.- The Bible and Missal stand shall be fabricated of brass and shall conform to the design and dimensions specified in the drawings listed in section 2 and as specified herein.

3.4 Finish.-

3.4.1 Finish 1, polished brass.- The area marked "polished" on Drawing 14-1-61 shall be highly polished, and all other surfaces shall have a compound satin finish. The stand shall then be given a gold color organic coating.

3.4.2 Finish 2, chromium plated.- Chromium plate finish shall conform to class 1, type I of QQ-C-320.

3.5 Workmanship.- The Bible and Missal stand shall be free from defects such as fractures, toolmarks, splits, punctures, dents, creases, malformation; sharp edges and burrs. Moving components shall not bind or be excessively loose. The stand shall be free from areas of poor or no finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection.- When a preproduction sample is required, it shall be examined for the defects in table I and specified dimensions.

4.3 Sampling for inspection.- Sampling for inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification, or applicable purchase document.

4.3.2 End product inspection.- A lot shall consist of all Bible and Missal stands of one finish offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated Bible and Missal stand.

4.3.2.1 Visual examination.- Examination shall be made of the end item for defects in table I. The inspection level shall be level II with an acceptable quality level of 6.5, expressed in terms of defects per hundred units.

TABLE I. - Defects

Examine	Defect
Finish (as applicable)	Not finish required Area of poor or no finish
Construction and workmanship	Fracture, toolmark, split, puncture, dent, malformation, sharp edge or burr Moving components bind or are excessively loose

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

4.3.2.2 Dimensional examination.- Inspection shall be made of the end item for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery.- Examination shall be made for defects in table II to determine that packaging, packing, and marking are in accordance with section 5 of this specification. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II. - Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.

4.3.3.1 Examination for closure and strapping of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects and closure and strapping shall be in accordance with the appendix of that specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each Bible and Missal stand shall be placed in a minimum 0.001-inch thick polyethylene bag, or wrapped in minimum 40-pound basis weight (24 x 36-500) kraft paper. The paper wrap shall be secured with gummed or pressure-sensitive adhesive tape. Each stand shall then be packaged in a fiberboard box conforming to style RSC, type CF, variety SW; or type SF, class domestic, grade 275 of PPP-B-636. Fiberboard inserts or other cushioning material shall be used to immobilize the contents and fill voids in the box caused by projections on the stand. Closure shall be in accordance with method II of the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

5.1.2 Level C.- Bible and Missal stands shall be packaged to afford adequate protection damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Four Bible and Missal stands, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding, shall be in accordance with the appendix of PPP-B-636.

5.2.2 Unless otherwise specified (see 5.2.2.1), four Bible and Missal stands, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW; or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be V3c or V3s fiberboard box, fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C.- Bible and Missal stands, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked with MIL-STD-129.

6. NOTES

6.1 Intended use.- The Bible and Missal stand covered by this specification is intended to support a Bible or Missal in a reading position on altars in Military Chapels.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Finish required (see 1.2).
(c) When a preproduction sample is required (see 3.2).
(d) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When V3c or V3s fiberboard is required for level B pack (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

MIL-S-43538

Custodians:

Army - GL
Navy - PE
Air Force - 28

Preparing activity:

Army - GL


Project No. 9925-0122

Review activities:


Navy - PE
Air Force - 28
Armed Forces Chaplians Board

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

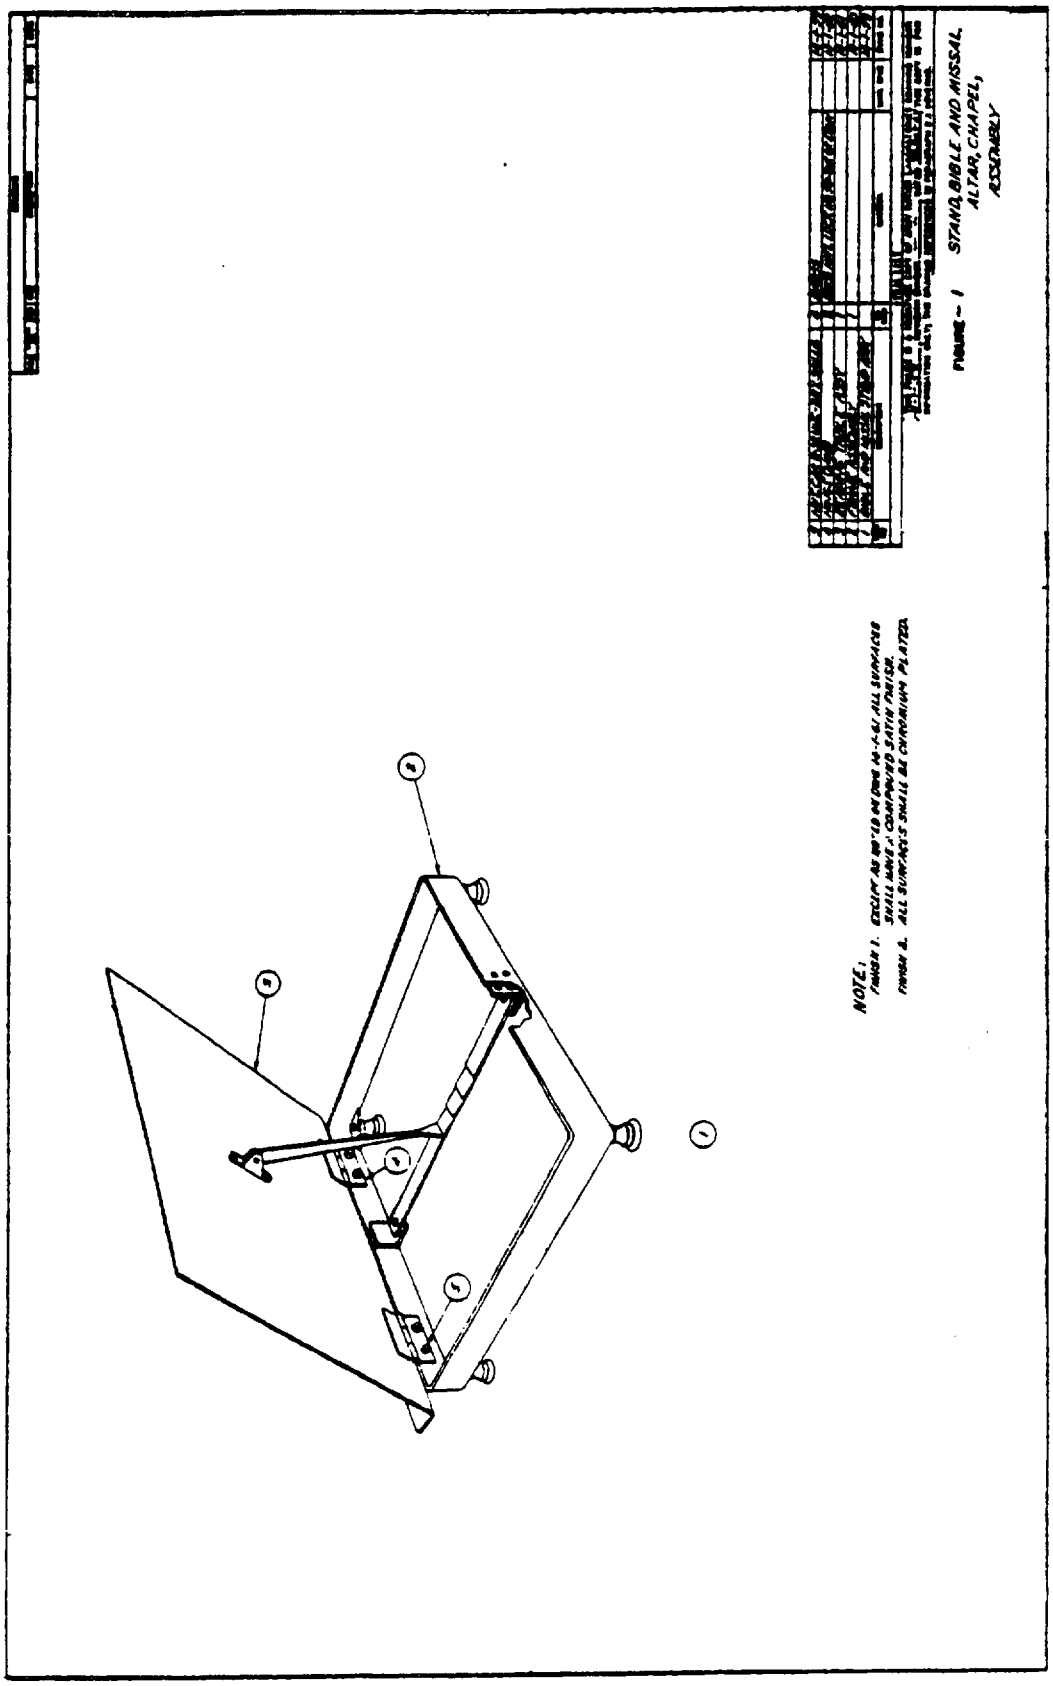

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

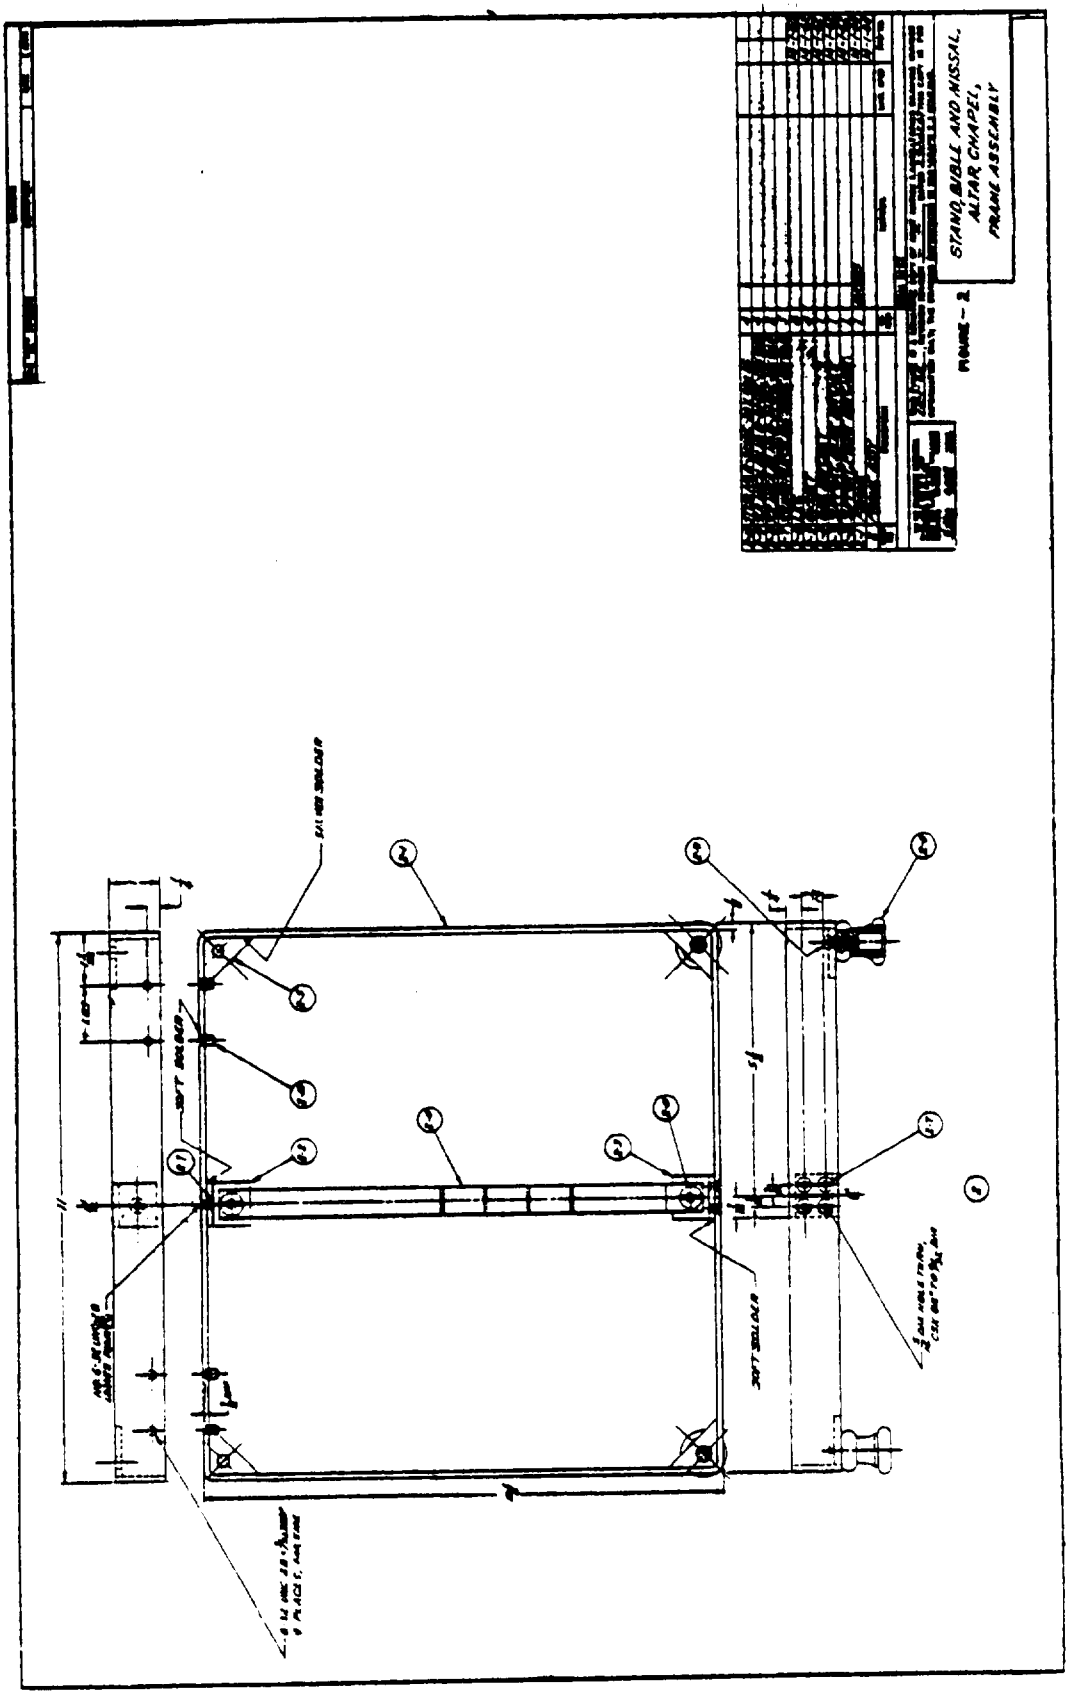

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

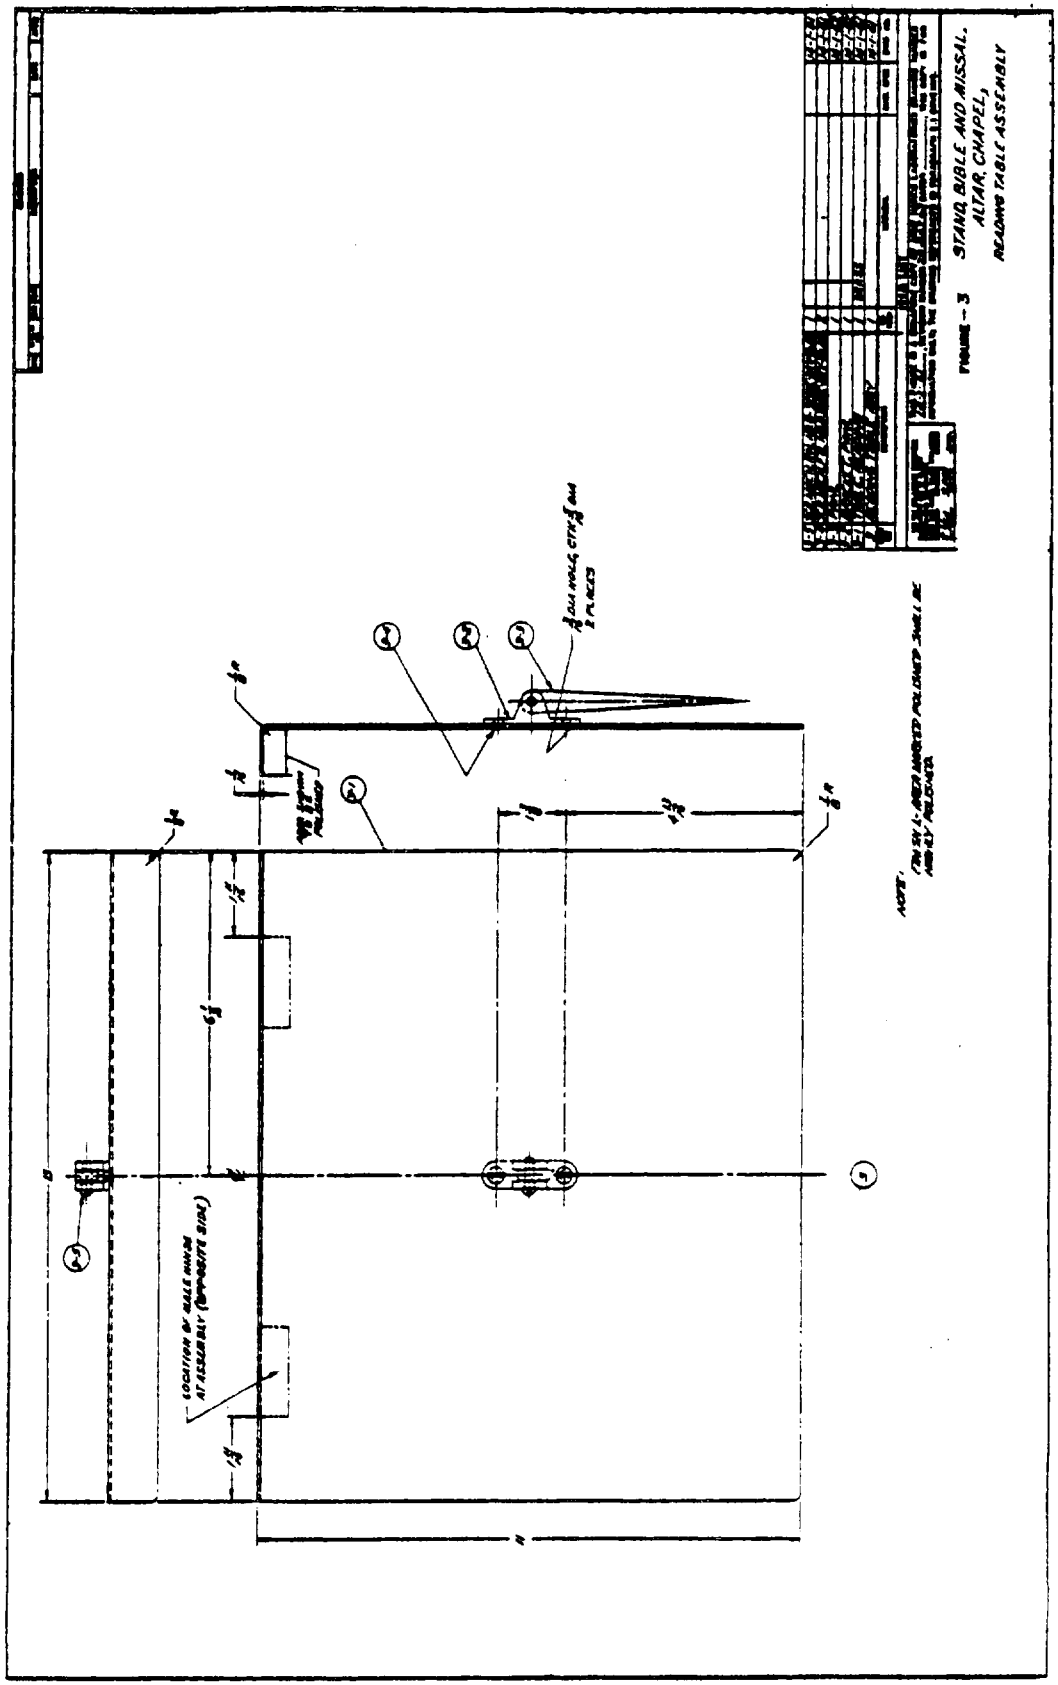

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

FIGURE - 4 STAND, BIBLE AND MISSAL, ALTAR, CHAPEL, DETAILS

MIL-S-3536

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:39Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21121:39Z
Check the source to verify that this is the current version before use.