INCH-POUND

A-A-52122
March 3, 1993

COMMERCIAL ITEM DESCRIPTION

KIT, WATER PURIFICATION, EMERGENCY

The General Services Administration has authorized the use of this Commercial Item Description.

Abstract. This commercial item description covers an emergency water purification kit and is recommended for use in situations where municipal treated water is not provided or where the available water is suspected of being polluted.

1. SALIENT CHARACTERISTICS

1.1 Description. The water purification kit consists of three components as specified below:

1.1.1 Flocculating tablet. The tablet shall conform to A-A-52119.

1.1.2 Filter pouch. The filter pouch shall be fabricated from bleached, 100% cotton cloth conforming to the requirements specified in table I (yarn size 15/1 in warp and /1 in filling has found to provide satisfactory material. The finished dimensions of the filter shall be 6-inches deep by 2.5-inches wide at the top opening. The filter shall be formed from a double layer of the cloth with a side and bottom seam. The bottom of the filter shall be semicircular. All raw edges shall be overedge stitched. The top opening edge of the filter shall be folded down and stitched.

Beneficial comments, (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 6850

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements

Characteristic	Test method	Test results
Weave	Visual	Oxford
Air permeability per single layer ($ft^3/min/ft^2$)	5450 of FED-STD-191	56 - 64
Weight (bleached), oz/sq yd	5041 of FED-STD-191	7.1 (min.)
Yarns /inch		
Warp	5050 of FED-STD-191	81 (min.)
Filling		29 (min.)
Tearing strength,(lb)		
Warp	ASTM D 1424	11 (min.)
Filling		8 (min.)
Breaking strength,(lb)		
Warp	ASTM D 5034	136 (min.)
Filling		92 (min.)

1.1.3 Water treatment bag. The water treatment bag shall be constructed with puncture proof, 4-mil polyethylene material. The measurements of the treatment bag shall be 11.75 inches in length and 7.5 inches in width. All side seams shall be heat sealed with 1/8 inch seam width. The bag shall include puncture proof tapes over wires to protect bag against piercing, double wire and the two center tabs to aid in opening and closing.

1.1.4 Emergency water purification procedure label. The procedure label shall conform to figure 1 and shall be embossed (printed) on the outside of the water treatment bag.

2. QUALITY ASSURANCE

2.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

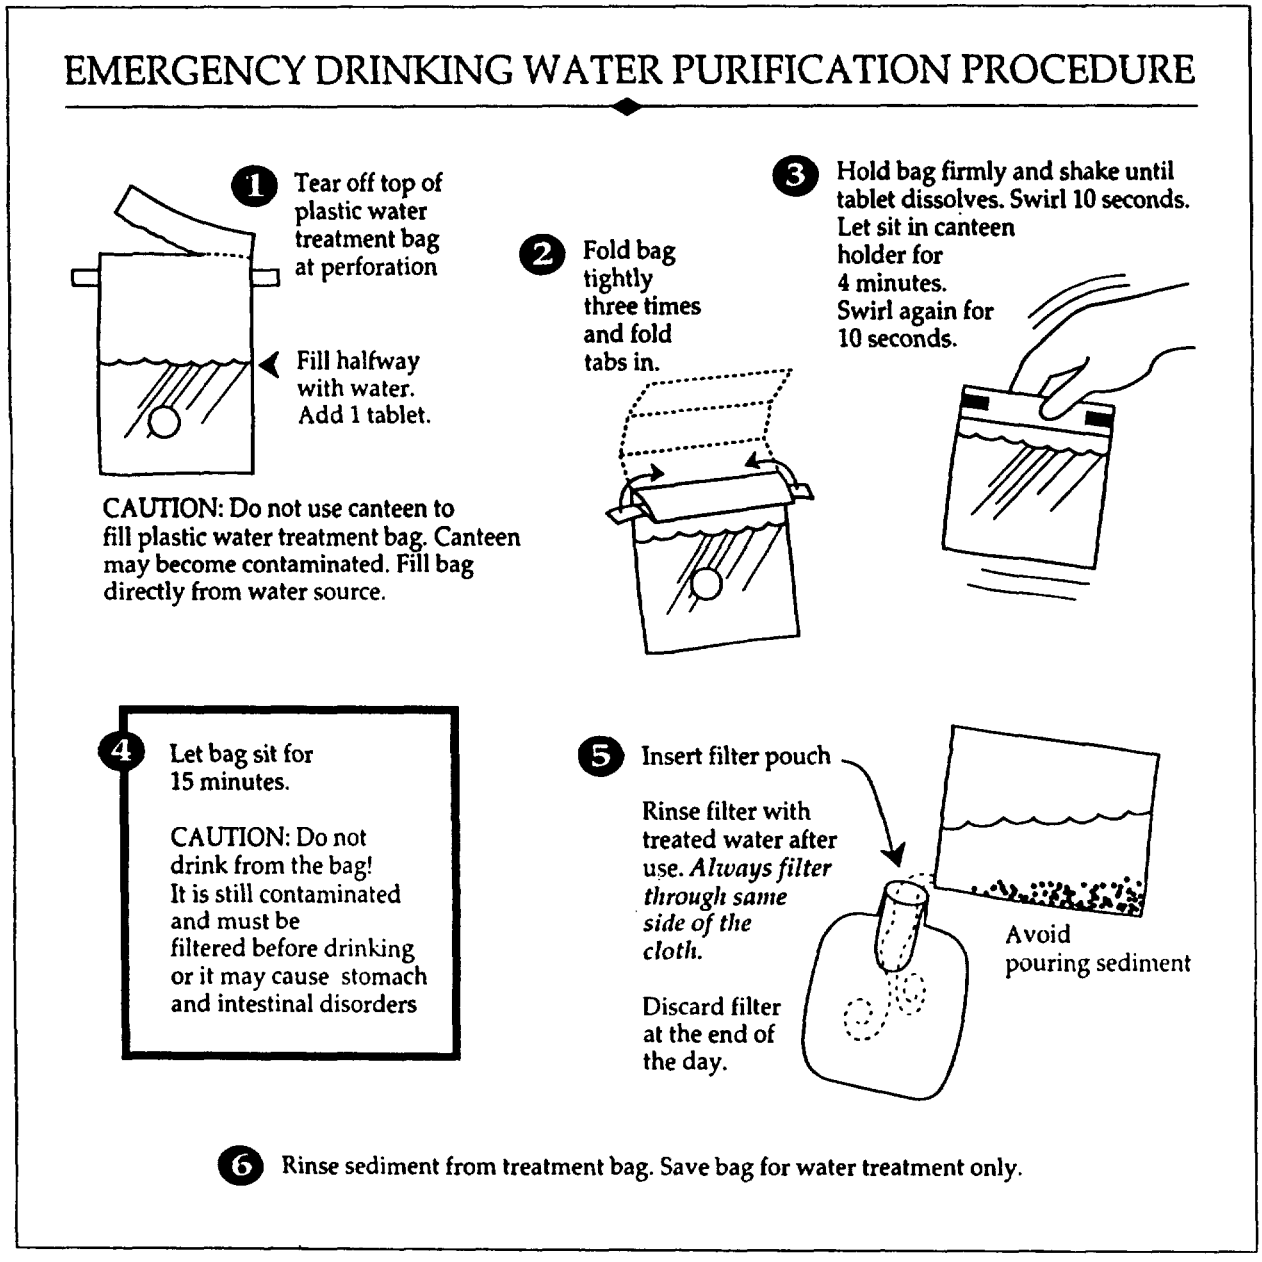


Figure 1 Procedure Label

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

2.2 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practical.

2.3 Metric product. Products manufactured using metric units will be considered on an equal basis with those manufactured using inch-pound units, provided that the product measurements fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376 and that all other requirements of this CID are met.

3. PACKAGING

3.1 Packaging.

3.1.1 Filter pouch. Each filter pouch shall be heat sealed in a snug-fitting polyethylene bag. The polyethylene film shall be 0.001 (minimum) inch thick.

3.1.2 Complete kit. Each complete kit, consisting of one water treatment bag, 36 flocculating tablets and three filter pouches (unit packed as specified in 3.1.1) shall be compactly arranged in a clear polyethylene film bag. The polyethylene film shall be 0.003 inch thick and the bag shall be closed by heat sealing. Care shall be taken to avoid excess air being entrapped in the bag during the sealing operation.

3.1.3 Intermediate packaging. Fifty kits, unit packed as specified in 3.1.2 shall be packed in an intermediate fiberboard box conforming to style RSC of PPP-B-636. The kits shall be arranged on edge in two layers with 25 kits per layer. The layers shall be separated by a full length and width fiberboard pad. Approximate inside dimensions of the intermediate box shall be 21-7/8 inches in length, and 7-3/8 inches in width, and 6-5/8 inches in depth. Each intermediate box shall be securely closed.

3.2 Packing. One hundred kits (two intermediate boxes) shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V3c, V3s, or V4s of PPP-B-636. Approximate inside dimensions of the shipping container shall be 22-1/4 inches in length, 15-7/8 inches in width, and 7-3/8 inches in depth. Each shipping container shall be closed and waterproofed in accordance with PPP-B-636.

3.3 Palletization. Kits, packed as specified, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147.

3.4 Marking. Marking of interior package, shipping container, and palletized unit loads shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

4. NOTES

4.1 Ordering data.

a. Title, number and date of this document.

4.2 Sources of documents.

4.2.1 Sources of government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

4.2.2 Source of non-government documents. Copies of non-governmental documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

MILITARY INTERESTS:

Custodians

Army - GL
Navy - MC
Air Force - 68

Review Activities

Army - MD, EA
Air Force - 50
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
COM - EPA
HHS - NIH

PREPARING ACTIVITY:

Army - GL

Project 6850-1126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-52122	1993 March 3

3. DOCUMENT TITLE

KIT, WATER PURIFICATION, EMERGENCY

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)
	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)
U.S. Army Natick RD&E Center	(1) Commercial: 508-651-4532 (2) AUTOVON/DSN: 256-4532
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SATNC-IRS Natick, MA 01760-5019	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil/ - Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.