MIL-S-14650A
20 June 1986
SUPERSEDING
MIL-S-0014650
15 September 1985

MILITARY SPECIFICATION

STREAMERS, Flags and Guidons, General Specification for

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements for flag and guidon streamers.

1.2 Classification. The streamers covered by this specification shall be of the following types, sizes, classes and styles.

Type I - Streamer Set (See applicable specification sheet)
Type II - Individual Streamers
Class 1 - Army (Specification sheet 1).
Class 2 - Marine Corps (Specification sheet 2).
Class 3 - Navy (Specification sheet 3).
Class 4 - Air Force (Specification sheet 4).
Class 5 - Unit Award Streamers (Specification sheet 5).
Size 1 - 2 3/4 inches wide and 4 feet long.
Size 2 - 2 3/4 inches wide and 3 feet long.
Size 3 - 1 3/8 inches wide and 2 feet long.
Style - See applicable specification sheet for style number.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Director, The Institute of Heraldry, US Army, Cameron Station, Alexandria, VA 22304-5050, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8345

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V -T-276 - Thread, Cotton
V -T-285 - Thread, Polyester
UU -P-268 - Paper, Craft, Wrapping
UU -P-553 - Paper, Wrapping, Tissue
PPP-B-566 - Boxes Folding, Paperboard
PPP-B-636 - Boxes Shipping, Fiberboard
PPP-B-676 - Boxes, Setup
PPP-T- 60 - Tape, Packaging, Waterproof

MILITARY

MIL-R-11589 - Ribbon, Awards, General Specification for
MIL-G-16491 - Grommet, Metallic

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams & Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures & Tables for Inspection by Attributes.
MIL-STD-129 - Marking for shipment and storage
MIL-STD-794 - Parts and Equipment, Procedures for Packaging of

2.1.2 Other Government documents, drawings, and publications. The following other documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

THE INSTITUTE OF HERALDRY

5-5-2 Streamers, Unit decorations, Campaign, War Service and Conflict, Infantry and Medical
5-5-2A Streamer Devices
5-5-614 Letters and Numerals for Streamers

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and other Governments documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

(Figures 1,2 and 3 are miniature copies of the referenced drawings and are for information only.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

THE COLOR ASSOCIATION OF THE UNITED STATES

DOD, Standard Shades for Heraldic Yarns for Embroidery & Ribbons.
DOD, Standard Color Card of Official Standardized Shades for Sewing Threads.
The Standard Color Reference of America, Tenth Edition.
American Society for Testing Materials (ASTM)

ASTM-D-3951 - Standard Practice for Commercial Packaging

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheets or MS standards) the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheets. In the event of any conflict between requirements of this specification and the specification sheets, the latter shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

3.2 Samples.

3.2.1 Guide sample. unless otherwise specified (see 6.2) the contracting officer shall furnish, or make available to the contractor for inspection, a guide sample of a finished streamer.

3.3 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.4 and 6.4).

3.4 Materials. Materials shall conform to the referenced specifications and the requirements specified herein.

3.4.1 Ribbon. The rayon ribbon for the streamers shall conform to MIL-R-11589 and the individual colors of the yarn used in the ribbon shall conform to the cable numbers designated by the color association of the U.S., and specified in the individual specification sheets.

3.4.2 Grommet. Grommet shall be brass size 0, type I and conform to MIL-G-16491.

3.4.3 Thread.

3.4.3.1 Cotton. The cotton thread shall conform to mercerized cotton thread IC1 or IC2 ticket number 000 of V-T-276.

3.4.3.2 Rayon. The rayon shall be a semi-dull continuous filament, regenerated, cellulose type rayon, two ply, 150 denier.

3.4.3.3 Polyester. The polyester shall be a natural soft multiple cord and conform to type I, class 1, subclass A, letter size AA of V-T-285.

3.4.3.4 Color. The color of the thread for the hem, inscription and devices shall be as specified on the applicable drawing and specification sheet unless otherwise specified (see 6.2). The bobbin thread shall be the same shade as the embroidery device or lettering.

3.5 Design. The design and size of the streamers shall be as indicated on TIOH drawing 5-5-2. Dimensions of the letters and numerals shall be as shown on TIOH drawing 5-5-614. Design and dimensions of devices for the streamers will be in accordance with drawing number 5-5-2A and government cartoons.

3.6 Construction.

3.6.1 Fly end. The fly end of the streamer shall be formed as shown in drawing 5-5-2 by using a type 304 stitch with 58 stitches per inch plus or minus 4 stitches inch. The ribbon shall be closely trimmed along the stitch to form the swallow-tail of the fly end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

3.6.2 Heading.

3.6.2.1 Type I and type II, sizes 1 and 2. Type I and type II, size 1 and 2 headings shall be constructed as shown on the applicable drawing and as specified herein. A one-inch hem shall be made using seam type EFaa-2 stitch type 301 with a minimum of 12 stitches per inch. Grommet as specified in 3.3.2 will be positioned on the heading as shown on the drawing.

3.6.2.2 Type II size 3. Type II, size 3 heading shall be lined with a 1 1/4 inchs wide cotton tape, 4 1/2 inches long and stitched on each side with seam type EFa-1, stitch type 301, 12 stitches per inch. A 1/2 inch eyelet will be centered on the heading as shown on drawing number 5-5-2. The eyelet shall be stitched through both layers of fabric with a regular button hole stitch. The heading shall then be formed by hemming the end of the streamer with a 3/8 inch turn under and stitched with seam type EFb-2 stitch type 301. Stitching gauge will be 1/16 inch with a 1/8 inch margin. The flat width of the finished hem shall be not less than 2 1/4 inches and turned to the reverse side of the finished streamer.

3.6.3 Embroidery. Lettering, devices, and numbers shall be positioned on the streamer as shown on drawing number 5-5-2. Embroidery yarn shall conform to the requirements indicated in 3.3.3 and quality of finished embroidery shall be equal to or better than the standard sample. Devices shall conform to the cartoon when government furnishes a cartoon for design. A computerized monogram machine may be used for alphabets in lieu of government cartoon however letter size and dimensions will be as shown on drawing 5-5-614.

3.7 Workmanship. Streamers shall be clean, well-made, and shall meet acceptable quality levels established by this specification. Thread tension shall be maintained throughout and all thread ends or cross over stitches shall be trimmed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in this section.

4.4 First article inspection. When a first article is required, examination shall be made on a completely fabricated streamer for all provisions of this specification applicable to end product examination and test.

4.5 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.5.1 Component and material inspection.

4.5.1.1 Component and material inspection. Inspection shall be performed on components as required by the Quality Assurance Provisions of the subsidiary specification. The inspection level and sample size shall be as required by the referenced specification.

4.5.1.2 In-process inspection. Inspection shall be performed at any point or during any phase of the manufacturing process to determine whether operation or assembly is accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated non-conformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with specification requirement.

Requirement, operation or assembly	Requirement paragraph
Heading construction	3.5.2
Thread checked at machine	3.3.3
Turn-in, turn under of seams	3.5.2
Embroidery design	3.5.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

4.5.2 Inspection of the end item.

4.5.2.1 Visual examination of streamers. The defects found during examination shall be classified in accordance with 4.4.2.1.1 or 4.4.2.1.2. The lots shall be inspected in accordance with 4.4.2.1.1 and 4.4.2.1.2 for both first article inspection and quality conformance inspection. The unit of product for these examinations shall be one streamer.

4.5.2.1.1 Examination of streamers for defects in material, design, construction, workmanship, and marking. Examination shall be made at a distance of 18-30 inches with good illumination except for functional defects which, by their nature, require closer examination. Defects designated by an asterisk (*) shall be classified as major when seriously affecting serviceability or appearance and minor when affecting serviceabilty or appearance, but not seriously.

Examine	Defect	Classification major	*	Minor
Quality of ribbon				
Type	Ribbon not as specified		*	
Color	Color other than specified	x		
	Off shade		*	
Material	Hole, cut, tear, smash or weak place.	x		
	Spot, stain, streak		*	
	Two or more contiguous broken or missing ends	x		
	Double pick, course pick or mispick clearly noticeable		*	
	Float or skip		*	
	Crease or wrinkle embedded		*	
Quality of Grommet	Broken, cracked or malformed		*	
	Contains rough or sharp edge			x
Construction and Workmanship general	Operation omitted or not accomplished as specified.		*	
	Component is not required type, style, or size required	x		
	Ribbon not continuous length	x		
Stitches, seams and stitching	Wrong color of thread	x		
	Color shade of thread off			x
	Incorrect type of seams, stitch, or stitching		*	
	Row of stitches partially or completely missing		*	
	Seams improperly formed	x		
	Tight or loose tension		*	
	Broken stitches			x
	Hem uneven		*	

Source: https://assist.dla.mil -- Downloaded: 202610-18T04:21Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification major	*	Minor
Embroidered design (letters, device, star, etc)	Broken stitches		*	
	Not positioned correctly		*	
	Design not as specified		*	
	Color not as specified		*	
	Cross over stitches and stubs not properly trimmed		*	
Heading	Grommet not properly positioned.		*	
	Stitching for eyelet not as specified		*	
	Stitching for eyelet not sewn completely through lining	x		

4.5.2.1.2 Examination of streamer for defects in dimensions.

Examine	Defect	Classification Major	Minor
Overall length	Not within specified tolerance . .	x	
Width of heading	Varies from specified finished width	x	
Width of ribbon	Width of ribbon varies more than 1/16 inch from size specified. . .	x	
Design	Unequal spacing and out of balance	x	
	Incorrect size by more than 1/8 inch	x	

4.5.2.1.3 Inspection levels and acceptable quality levels (AQLs). A one hundred percent inspection shall be performed on the end item streamers. The acceptable quality levels expressed in defects per hundred units shall be 4.0 major or 10.0 total. A critical defect shall be cause for rejection. Streamers with a critical defect shall be removed from the lot and replaced with an acceptable streamer prior to resubmittal.

4.5.3 Examination of count of streamers in intermediate containers. Streamers packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or marked quantity of streamers shall be classified as a defect. Any defect in count will be cause for rejection and corrected prior to resubmittal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

4.5.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this section are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container full prepared for shipment with the exception that it need not be sealed. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units a streamer.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing. Any component damaged affecting serviceability
Workmanship	Inadequate application of components. Bulging or distortion of containers.
Weight	Net weight exceeds requirements.

4.5.5 Palletization examination. An examination shall be made to determine that the palletization is in compliance with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be levels A, C or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Streamer sets. Type I streamer set shall be laid out flat in stacks with a maximum of 20 streamers per stack. Each stack shall be wrapped in two thicknesses of tissue paper conforming to type I, grade A, class 1 of UU-P-553. Tissue paper shall overlap each side and both ends by a minimum of four inches. The ends of the tissue paper shall be folded over each end and secured with 2 inch wide gummed paper tape. Each stack shall be wrapped around the center and each end with two inch wide gummed paper tape to retain the streamers in stacks. All of the type I streamers comprising one set shall then be tightly wrapped with 50 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The closure shall be sealed with 2-inch minimum width gummed paper tape. Each set of streamers shall then be individually packaged in a snug fitting box conforming to PPP-B-636, class domestic, style optional. Closure shall be in accordance with the appendix of the box specification. Each box will contain a listing of all streamers supplied by campaign name.

5.1.1.2 Individual streamers. Each type II streamer shall be wrapped around a 3 inch x 1/3 inch wooden dowel or fiber board tube. Each streamer shall be placed in a heatsealed polyethylene bag. Each bag shall contain a printed label containing as a minimum the following information: NSN, Campaign, Contract Number. A maximum of 100 streamers of one type shall be packaged in a snug fitting box conforming to PPP-B-636, class domestic, style optional. Closure shall be in accordance with the appendix of the box specification.

5.1.1.3 Intermediate packaging. Unless otherwise specified, streamers of the same type, unit preserved as specified above, shall be neatly stacked and preserved in multiples of 12 within a snug fitting intermediate fiberboard container conforming to class domestic grade 275 of PPP-B-636. The net weight of contents of each container shall not exceed 65 pounds. Closure shall be in accordance with the appendix of the box specification.

5.1.2 Level C. Streamers shall be preserved to the MIL-STD-794 requirements for this level.

5.1.3 Commercial. Streamers shall be preserved in accordance with the applicable requirements of ASTM-D-3951.

5.2 Packing. Packing shall be level A, B, C or commercial as specified (see 6.2).

5.2.1 Level A. Streamers preserved as specified in 5.1 shall be packed in a snug fitting fiberboard shipping container conforming to class weather

Source: https://assist.dla.mil -- Downloaded: 202640-18T04:21Z
Check the source to verify that this is the currentversion before use.

resistant, V3s or V3c of PPP-B-636. Closure shall be in accordance with the applicable container specification.

5.2.2 Level B. Streamers preserved as specified in 5.1.1.3 shall be acceptable as level B pack.

5.2.3 Level C. Streamers of one type, size, class, and style only, preserved as specified in 5.1, shall be packed in accordance with the applicable requirements of MIL-STD-794.

5.2.4 Commercial. Streamers, preserved as specified in 5.1, shall be packed in accordance with the applicable requirements of ASTM-D-3951.

5.3 Palletization. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be palletized in accordance with MIL-STD-147. Palletized loads shall be uniform in size and quantities to the greatest extent possible. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, intermediate boxes, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM-D-3951, as applicable.

5.5 General.

5.5.1 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.4.4.

6. NOTES

6.1 Intended use. The streamers are designed for display with military flags to indicate service participation or awards by the military service or unit. Type I streamer sets are intended for display on the service flags. Type II individual streamers are for display by units.

6.2 Ordering data.

6.2.1 Ordering data. Procurement documents should specify the following:

(a) Title number, and date of this specification.
(b) Whether guide sample will be furnished (3.1.1).
(c) When a first article is required (3.2).
(d) Type, Size, Class and Style required (see 2.1).
(e) Inscription or device when not as indicated by style number.
(f) Selection of applicable levels of packaging and packing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article inspection is required, the item should be a first article sample or it may be a standard production item from the contractor's current inventory as specified in 4.4. The first article should consist of one completed streamer. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Changes from previous issue. Asterisks or vertical lines are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of changes.

Custodians:
Army - IH
Air Force - 11
Navy - NU


Review activity:
Air Force - 82,99
Navy - MC

User activity:
Air Force - 45
Navy - CG

Preparing activity:
Army - IH

(Project No. 8345 -0167)

Source: https://assist.dla.mil -- Downloaded: 202640-18T04:21Z
Check the source to verify that this is the current version before use.

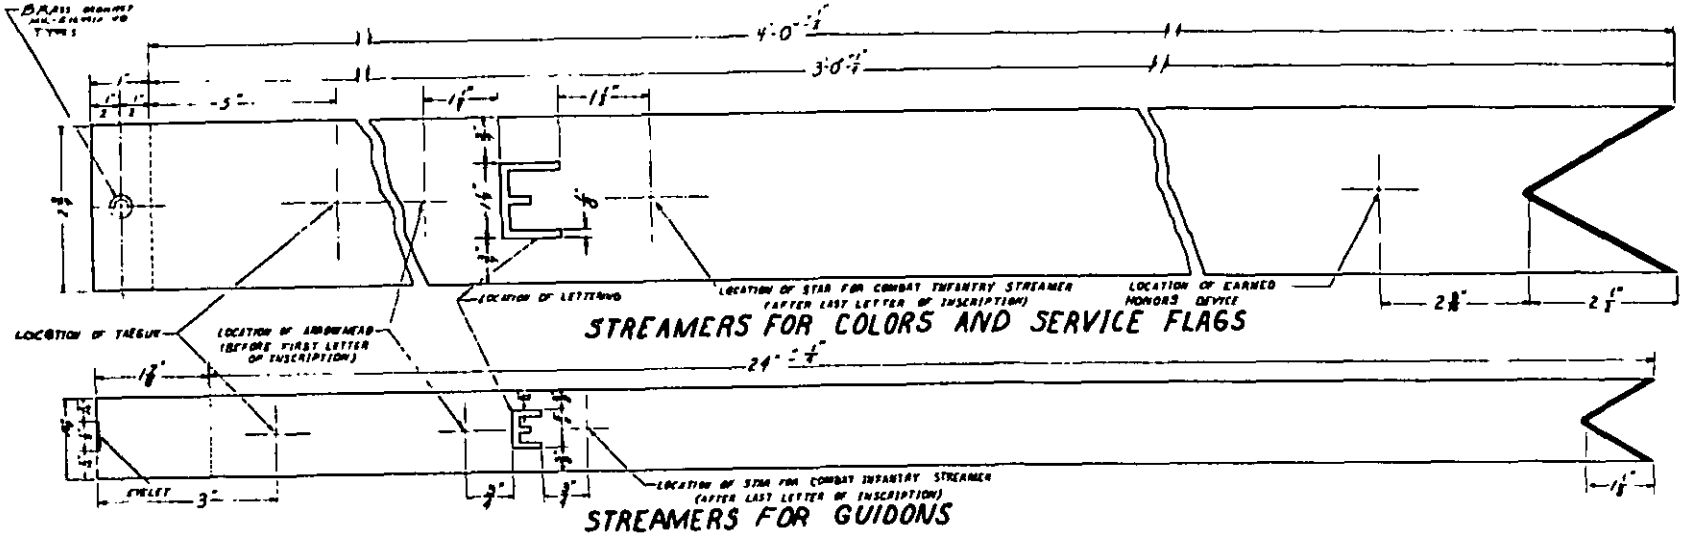


NOTES


1. TO BE MANUFACTURED IN ACCORDANCE WITH MIL-S-14650
2. FOR DEVICES TO BE USED ON STREAMERS SEE TIOH DRAWING NO S-3-2A
3. FOR LETTERS / NUMERALS USED ON STREAMER SEE TIOH DRAWING S-5-61A
4. INSCRIPTION, WHEN REQUIRED SHALL BE CENTERED ON THE STREAMER WITH LETTERS / NUMERALS EQUALLY SPACED WITH 1 1/2 INCH BETWEEN WORDS AND DATES.
5. WHEN BOTH AN INSCRIPTION AND STAR OR PALM IS REQUIRED, THE DEVICE WILL BE CENTERED BETWEEN THE HEADING AND THE FIRST LETTER OF THE INSCRIPTION EXCEPT THE STAR ON THE COMBAT INFANTRY STREAMER WILL BE AS SHOWN ON THE DRAWING POSITION OF OTHER DEVICES WILL BE AS INDICATED
6. WHEN ONLY 1 DEVICE IS REQUIRED ON A STREAMER, IT SHALL BE CENTERED WHEN MULTIPLE DEVICES ARE SPECIFIED, THEY WILL BE CENTERED WITH A 3 INCH SPACE BETWEEN THE DEVICES AND SHALL BE IN THE ORDER LISTED IN THE APPLICABLE SPECIFICATION SHEET OF MIL-R-11589
7. INSCRIPTION SHALL BE PLACED ON THE RIBBON SO THAT THE RIBBON PATTERN IS IN THE SEQUENCE LISTED IN THE APPROPRIATE SPECIFICATION SHEET OF MIL-R-11589.
8. REM ON THE HEADING SHALL BE ON THE REVERSE SIDE OF THE STREAMER
9. LETTERS, NUMERALS, AND DEVICES TO BE NEATLY FINISHED ON BOTH SIDES OF THE STREAMER AND WILL APPEAR REVERSED ON THE REVERSE SIDE OF THE STREAMER

This is a miniature copy of
THE INSTITUTE OF HERALDRY
Dwg. No. S-5-2, dtd 17 Sep 65
This copy is furnished for information only.
The dwg. referenced in para. 2.1 governs.

Source: https://assist.dla.mil -- Downloaded: 202640-18T04:21Z
Check the source to verify that this is the current version before use.




FOR GUIDONS

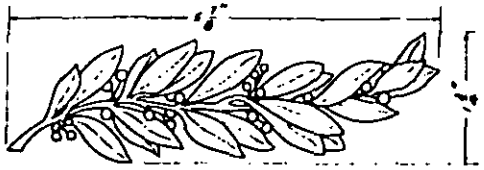


FOR COLORS AND STANDARDS
PALM FOR CROIX DE GUERRE, AND VIETNAMESE GALLANTRY CROSS AND VIETNAMESE CIVIL ACTIONS MEDAL FIRST CLASS
EMBROIDERY TO BE BRONZE HAW 67147 WITH STEMS, OUTLINE OF LEAVES AND BERRIES TO BE MOSSTONE GREEN HAB 67127




FOR SILVER BANDS



FOR COLORS AND STANDARDS
ARROWHEAD
EMBROIDERY TO BE BRONZE HAW 67147

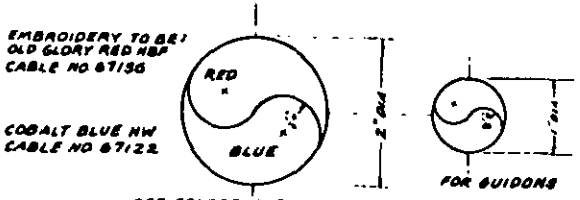


FOR COLORS AND STANDARDS
REPUBLIC OF KOREA TAEGUK




FOR ORGANIZATIONAL COLORS (ARMY CARS)
EARNED HONOR DEVICE
EMBROIDERY TO BE THE SAME COLOR AS INSCRIPTION




FOR COLORS AND STANDARDS (ARMY, AF)
STAR FOR CROIX DE GUERRE AND VIETNAMESE GALLANTRY CROSS

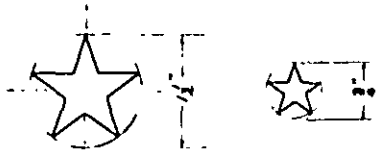


FOR COLORS AND STANDARDS (ARMY)
COMBAT AND EXPERT INFANTRY BLUE STAR FOR ADDITIONAL AWARD
EMBROIDERY TO BE ULTRAMARINE BLUE HS 67118



FOR COLORS AND STANDARDS
STAR FOR NAVY AND MARINE CORPS
STREAMERS WHEN SPECIFIED



FOR COLORS AND STANDARDS (USMC)
MALTESE CROSS
EMBROIDERY TO BE BRONZE HAW 67147



FOR COLORS AND STANDARDS (USMC)
OAK-LEAF CLUSTER
EMBROIDERY TO BE BRONZE HAW 67147


NOTES
1. DEVICES FOR STREAMERS WHEN SPECIFIED IN MIL-S-14650
2. WHEN A STAR IS SPECIFIED THE YARN COLOR WILL BE AS INDICATED.

DEVICE	COLOR AND CABLE NO.
GOLD STAR	GOLD HF 67106
SILVER STAR	SILVER GRAY HAM
BRONZE STAR	BRONZE HAW 67147


3. POSITIONING OF DEVICES WILL BE IN THE ORDER SPECIFIED AND SPACED AS SHOWN ON DRAWING S-6-2.

This is a miniature copy of THE INSTITUTE OF HERALDRY Dwg No. S-5-28 dtd 6 Oct 65. This copy is for information only, the dwg. referenced in paragraph 2.1 governs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

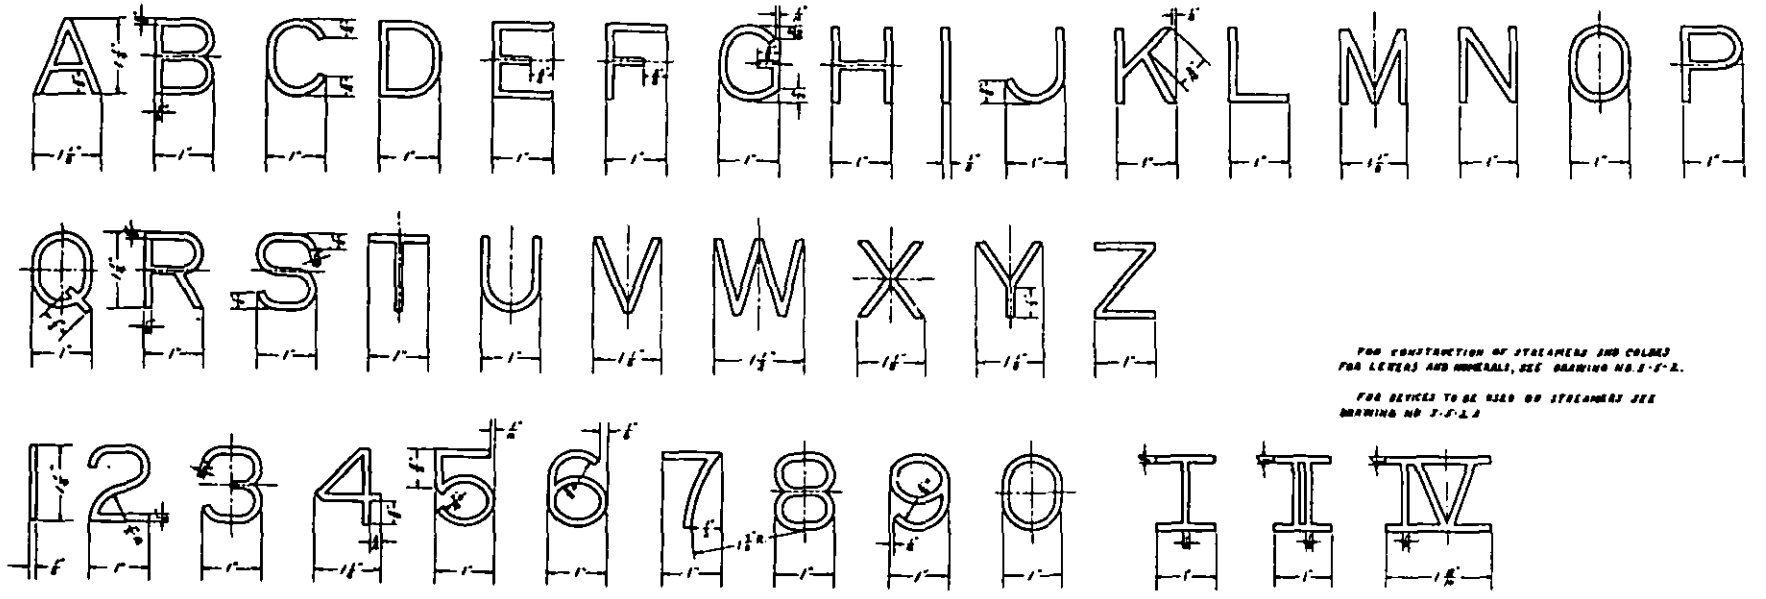

LETTERS AND NUMERALS FOR USE ON STREAMERS FOR COLORS AND STANDARDS

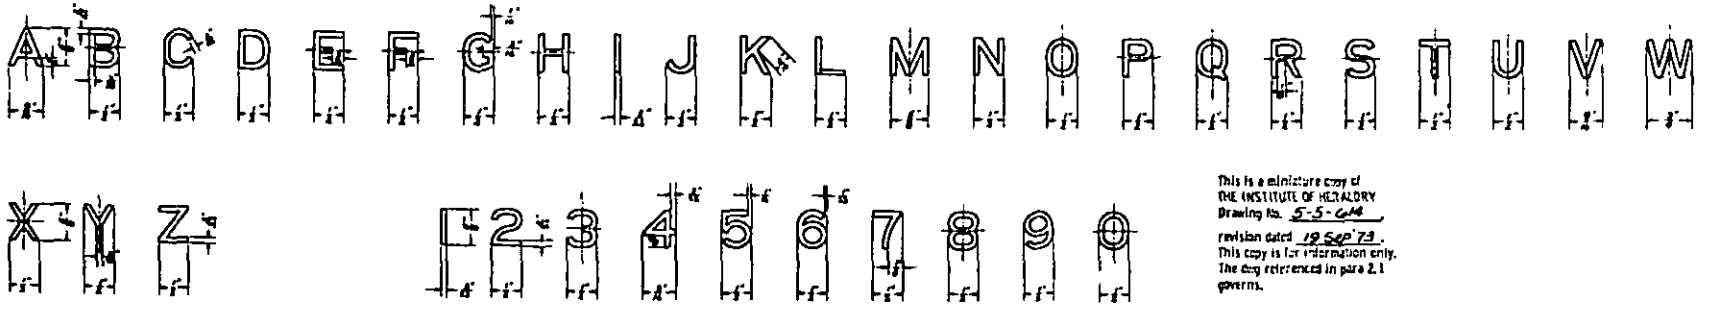

LETTERS AND NUMERALS FOR USE ON STREAMERS FOR GUIDONS

U.S. GOVERNMENT PRINTING OFFICE: 1986 - 605-036/43607

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. *All users of military standardization documents* are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. *If block 7 is filled out, an* acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
The Institute of Heraldry,
US Army
Cameron Station
Alexandria, VA 22314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Director
The Institute of Heraldry, US Army
ATTN: DAAG-HDT
5010 Duke Street
Alexandria, VA 22314

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-14650A	Streamers, Flags and Guidons, General Specification for

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:21Z
Check the source to verify that this is the current version before use.