FED SUP CLASS
5307

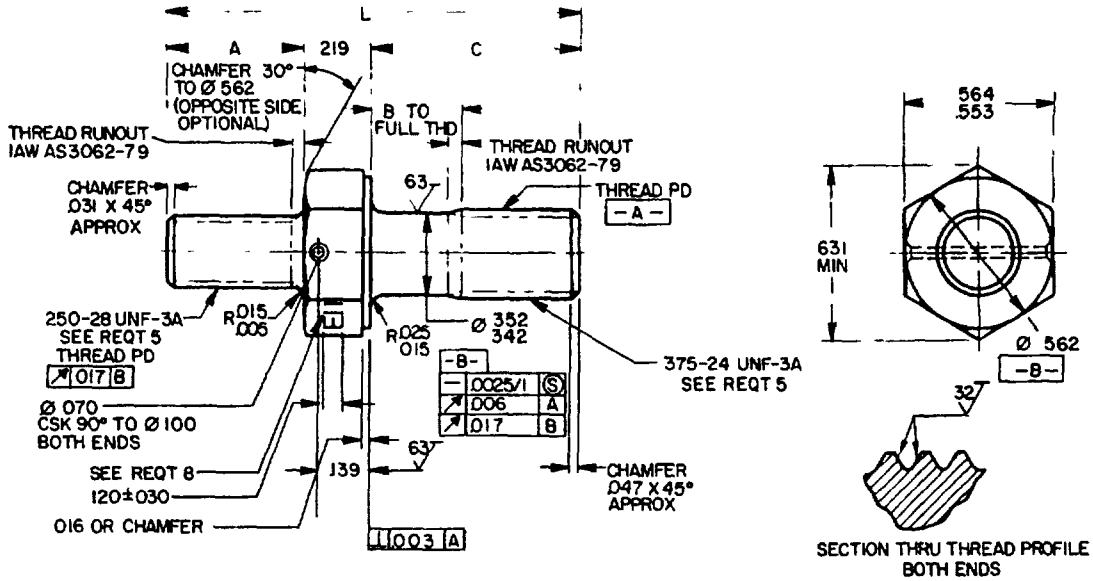


TABLE 1 DASH NUMBERS AND DIMENSIONS

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100	DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-001	.438	1/	.750	1.406	4.10	-050	.500	1/	.750	1.469	4.27
-002	.438	1/	.812	1.469	4.27	-051	.500	1/	.812	1.531	4.44
-003	.438	1/	.875	1.531	4.44	-052	.500	1/	.875	1.594	4.61
-004	.438	1/	.938	1.594	4.61	-053	.500	1/	.938	1.656	4.78
-005	.438	1/	1.000	1.656	4.78	-054	.500	1/	1.000	1.719	4.95
-006	.438	1/	1.062	1.719	4.95	-055	.500	1/	1.062	1.781	5.12
-007	.438	.125	1.125	1.781	5.12	-056	.500	.125	1.125	1.844	5.29
-008	.438	.188	1.188	1.844	5.29	-057	.500	.188	1.188	1.906	5.43
-009	.438	.250	1.250	1.906	5.43	-058	.500	.250	1.250	1.969	5.60
-010	.438	.312	1.312	1.969	5.60	-059	.500	.312	1.312	2.031	5.77
-011	.438	.375	1.375	2.031	5.77	-060	.500	.375	1.375	2.094	5.94
-012	.438	.438	1.438	2.094	5.94	-061	.500	.438	1.438	2.156	6.14
-013	.438	.500	1.500	2.156	6.14	-062	.500	.500	1.500	2.219	6.28
-014	.438	.562	1.562	2.219	6.28	-063	.500	.562	1.562	2.281	6.45
-015	.438	.625	1.625	2.281	6.45	-064	.500	.625	1.625	2.344	6.62
-016	.438	.688	1.688	2.344	6.62	-065	.500	.688	1.688	2.406	6.76
-017	.438	.750	1.750	2.406	6.76	-066	.500	.750	1.750	2.469	6.93
-018	.438	.812	1.812	2.469	6.93	-067	.500	.812	1.812	2.531	7.10
-019	.438	.875	1.875	2.531	7.10	-068	.500	.875	1.875	2.594	7.27
-020	.438	.938	1.938	2.594	7.27	-069	.500	.938	1.938	2.656	7.44
-021	.438	1.000	2.000	2.656	7.44	-070	.500	1.000	2.000	2.719	7.61
-022	.438	1.062	2.062	2.719	7.61	-071	.500	1.062	2.062	2.781	7.78
-023	.438	1.125	2.125	2.781	7.78	-072	.500	1.125	2.125	2.844	8.09
-024	.438	1.250	2.250	2.906	8.09	-073	.500	1.250	2.250	2.969	8.43
-025	.438	1.375	2.375	3.031	8.43	-074	.500	1.375	2.375	3.094	8.77
-026	.438	1.500	2.500	3.156	8.77	-075	.500	1.500	2.500	3.219	9.11
-027	.438	1.625	2.625	3.281	9.11	-076	.500	1.625	2.625	3.344	9.42
-028	.438	1.750	2.750	3.406	9.42	-077	.500	1.750	2.750	3.469	9.76
-029	.438	1.875	2.875	3.531	9.76	-078	.500	1.875	2.875	3.594	10.11
-030	.438	2.000	3.000	3.656	10.11	-079	.500	2.000	3.000	3.719	10.15

Ⓑ ENTIRE STANDARD REVISED

APPROVED 24 FEB 60 REVISED Ⓑ 22 MAY 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

N/A

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED AND STEPPED, HEXAGON WRENCHING, DRILLED, STEEL, .250-28 UNF-3A X .375-24 UNF-3A	MILITARY STANDARD MS9312
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 1 OF 3

DD FORM (MAY 73) 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5307-0446

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

TABLE I DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-100	562	1/	750	1 531	4 44
-101	562	1/	812	1 594	4.61
-102	562	1/	875	1 656	4 78
-103	562	1/	.938	1 719	4.95
-104	562	1/	1 000	1.781	5.12
-105	562	1/	1 062	1.844	5.29
-106	.562	125	1 125	1 906	5 43
-107	562	188	1 188	1 969	5.60
-108	.562	250	1 250	2.031	5 77
-109	562	312	1 312	2 094	5 94
-110	562	375	1 375	2 156	6 14
-111	.562	438	1 438	2 219	6 28
-112	562	500	1 500	2.281	6 45
-113	.562	562	1 562	2 344	6 62
-114	.562	625	1.625	2 406	6.76
-115	562	688	1 688	2 469	6.93
-116	.562	750	1 750	2 531	7.10
-117	562	812	1.812	2 593	7 27
-118	562	875	1.875	2.656	7.44
-119	.562	938	1 938	2 719	7 61
-120	562	1.000	2 000	2 781	7 78
-121	562	1.062	2 062	2 844	8 09
-122	562	1 125	2 125	2 906	8 43
-123	562	1 250	2 250	3.031	8.77
-124	.562	1 375	2 375	3 156	9 11
-125	562	1.500	2 500	3 281	9 42
-126	562	1 625	2 625	3 406	9 76
-127	.562	1 750	2 750	3 531	10 11
-128	.562	1 875	2 875	3 656	10 15
-129	562	2 000	3 000	3 781	10.27

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-150	625	1/	750	1 594	4 61
-151	625	1/	812	1 656	4 78
-152	625	1/	875	1 719	4 95
-153	625	1/	938	1 781	5 12
-154	625	1/	1 000	1 844	5 29
-155	625	1/	1 062	1.906	5 43
-156	625	125	1 125	1 969	5 60
-157	625	188	1 188	2 031	5 77
-158	625	250	1.250	2 094	5 94
-159	625	312	1 312	2 156	6 14
-160	625	375	1 375	2 219	6 28
-161	.625	438	1 438	2 281	6 45
-162	625	500	1 500	2 344	6 62
-163	625	562	1 562	2 406	6 76
-164	625	.625	1 625	2.469	6 93
-165	625	688	1 688	2 531	7.10
-166	625	750	1 750	2 594	7.27
-167	.625	812	1.812	2 656	7 44
-168	625	875	1 875	2 719	7 61
-169	625	938	1 938	2 781	7 78
-170	625	1 000	2 000	2 844	8.09
-171	625	1 062	2.062	2.906	8 43
-172	625	1 125	2 125	2 969	8 77
-173	625	1 250	2 250	3 094	9 11
-174	625	1 375	2 375	3 219	9 42
-175	625	1 500	2 500	3.344	9 76
-176	625	1 625	2 625	3 469	10 11
-177	.625	1 750	2 750	3 594	10 15
-178	625	1 875	2 875	3 719	10 27
-179	625	2 000	3 000	3 844	10.30

1/ THREAD TO HEAD MAXIMUM TWO INCOMPLETE THREADS

REQUIREMENTS

1 MATERIAL STEEL IN ACCORDANCE WITH AMS 6322-80

2 FINISH. CADMIUM PLATE IN ACCORDANCE WITH AMS 2400-80

3 HARDNESS 26-32HRC

4 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

5 THREADS THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 22

6 SURFACE TEXTURE SURFACE TEXTURE SHALL BE IN ACCORDANCE WITH AS291-64

7 MAGNETIC PARTICLE INSPECTION MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83

8. MARKING MATERIAL IDENTIFICATION AND MARKING IN ACCORDANCE WITH AMS 2800-76 DEPRESSED .010 MAX

9. TOLERANCE UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ±5°

10 EDGES BREAK SHARP EDGES .003 - .015, UNLESS OTHERWISE SPECIFIED

11 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE: MS9312-001
- DASH NUMBER
- BASIC MS NUMBER

MS9312-001 INDICATES STUD, SHOULDERED AND STEPPED, HEXAGON WRENCHING, DRILLED, STEEL, .250-28 UNF-3A X .375-24 UNF-3A, LENGTH 1 406

APPROVED 24 FEB 60 REVISED (B) FOR CHANGES SEE PAGES 1, 2 AND 3

USER ACTIVITIES.

REVIEWER ACTIVITIES.
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED AND STEPPED, HEXAGON WRENCHING, DRILLED, STEEL, 250-28 UNF-3A X .375-24 UNF-3A	MILITARY STANDARD MS9312
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 2 OF 3

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5307-0446

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5307

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS.

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-1S

APPROVED 24 FEB 60 REVISED (B) FOR CHANGES SEE PAGES 1,2 AND 3

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED AND STEPPED, HEXAGON WRENCHING, DRILLED, STEEL, .250-28 UNF-3A X .375-24 UNF-3A	MILITARY STANDARD MS9312
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 3 OF 3

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5307-0446

U.S. GOVERNMENT PRINTING OFFICE: 1986 - 609-036/43849

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.