A-A-53841
24 March 1989

COMMERCIAL ITEM DESCRIPTION

PAIL, PLASTIC

14 Quart Capacity

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Military Specification MIL-P-36257A which is cancelled.

This Commercial Item Description covers a covers a 14 quart plastic pail with cover, suitable for use in the storage of anatomical specimens.

Salient characteristics:

The plastic pail shall have a 14 quart capacity with a cover and removable bail with handle. The pail body, cover, and bail handle shall be made from virgin, low-density, general-purpose polyethylene or polypropylene.

When tested using ASTM methods, the plastic pail shall have the following properties:

Polyethylene	Melt Index	Density
Pail body and bail handle	1.8 - 2.2	0.91 - 0.93
Cover	8.5 - 11.0	0.907 - 0.927
Polypropylene		
Pail body, cover, and bail handle	11 - 13	0.90 - 0.91

The plastic pail shall be as shown in figure 1. The pail shall consist of a body and a tight fitting cover. The bail shall be fitted with a suitable handle. The pail shall have a capacity of not less than 14 quarts of liquid. Measurements of the pail shall be as shown in figure 1. Thickness of the pail body and cover shall not be less than 0.050 inch.

AMSC N/A FSC 7240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.

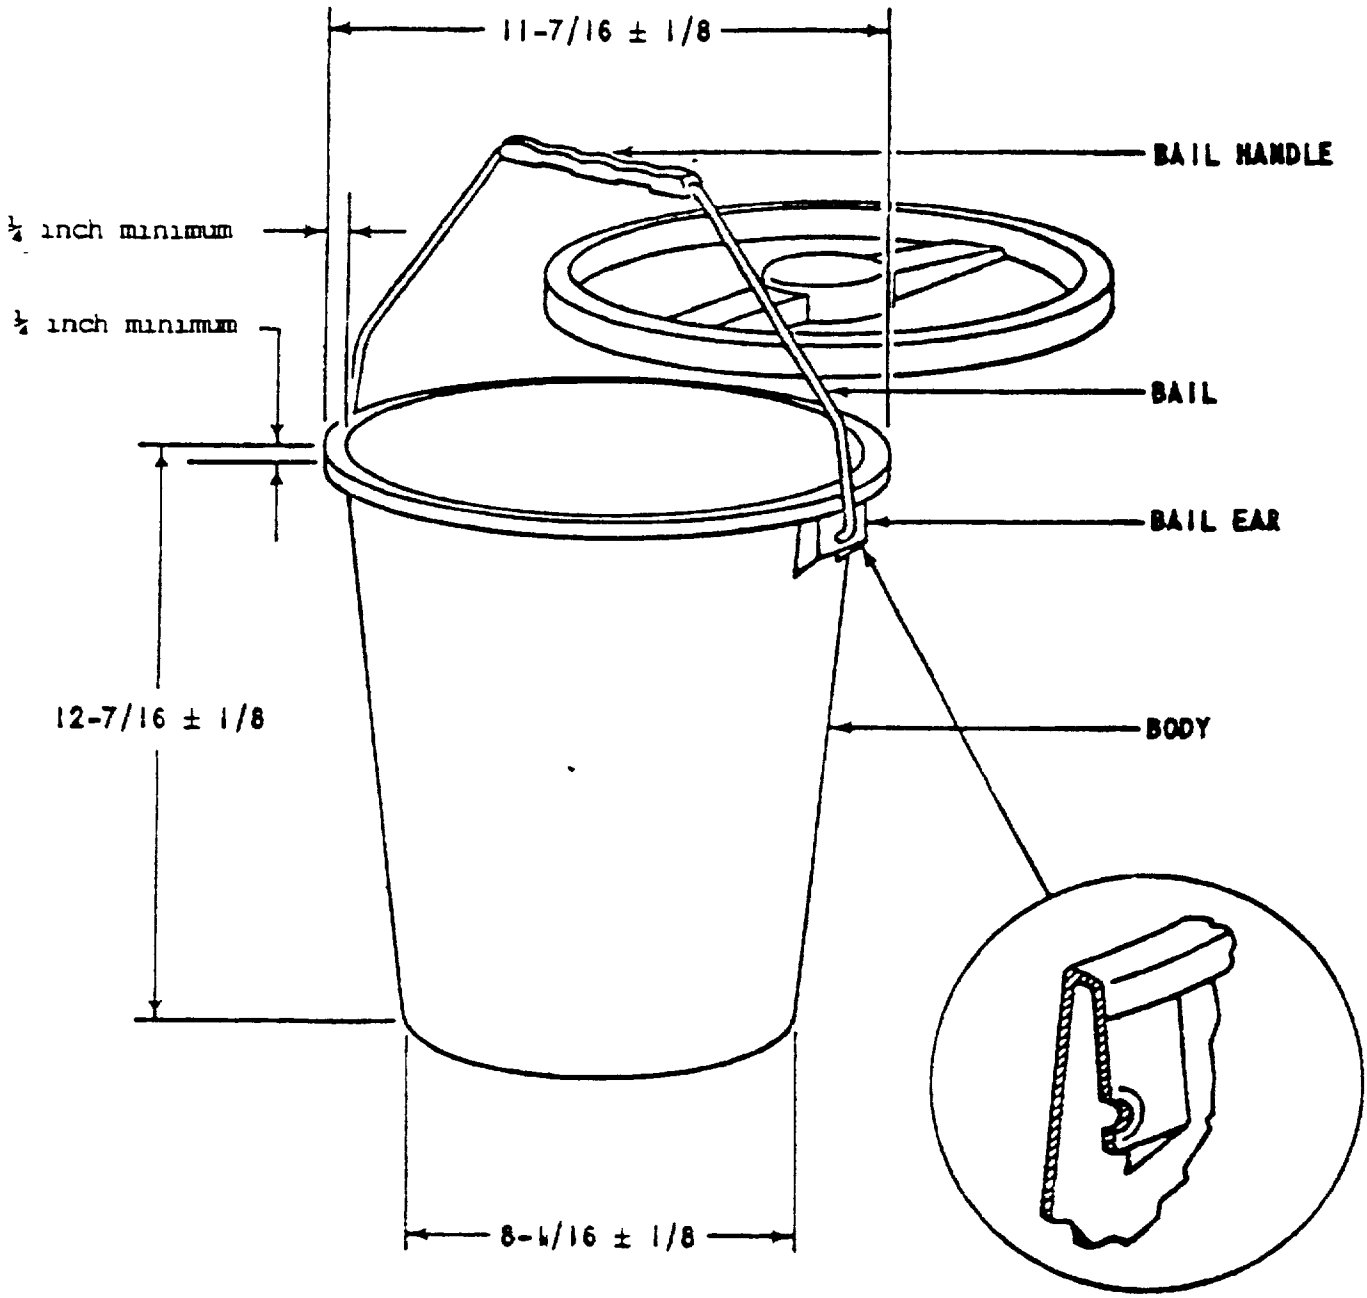


FIGURE 1. Plastic pail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.

The bail shall be made from carbon or alloy steel wire, not less than 0.117 inch in diameter. The wire shall be zinc, nickel, or chromium-over copper-over nickel, plated.

The color of the plastic cover shall be white. The plastic body shall be a uniform soft pastel yellow. All color shall be uniform.

The pail body and cover shall be free of cracks, tears, ruptures, and thin areas. Mold flash shall be removed from all plastic parts.

The pail body and cover shall be free from grease, oil, dirt, or other contamination.

Workmanship. The plastic pail shall be free from defects which detract from its appearance or impair its serviceability.

Unit. Each (EA). One pail and cover, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, with an AQL of 1.0 (percent defective) and an inspection level of II. The unit of product for examination purposes shall be one plastic pail as specified in this description.

Defects.

Pail is not complete with all component parts.

Bail is not removable.

Bail is not assembled to pail.

Cover does not fit body of pail snugly.

Cover cannot be removed, or is excessively difficult to remove.

Body and cover are not free of cracks, tears, and ruptures.

Body and cover are not free of thin areas.

Body or cover is not correct color.

Color is not uniform.

Plating on bail is missing.

Plated bail is not free of chips, blisters, and unplated areas.

Mold flash is not removed from plastic parts.

Pail is not free from grease, oil, dirt, or other contamination.

Sampling for tests. Sampling for tests, including dimensional test, shall be conducted in accordance with MIL-STD-105, with an AQL of 2.5 (percent defective) and an inspection level of S-3. The unit of product for test purposes shall be one plastic pail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.

a. First article. Where a first article sample is required, all tests shall be performed on that unit.

b. Acceptance testing. When a first article sample has not been required, one unit shall be subjected to the performance test specified herein. If a test article sample has successfully passed all tests, performance test shall not be required at acceptance.

Tests

Melt index and density. The melt index and density shall be determined in accordance with the following test methods:

Property	Test Method
Melt Index	ASTM Designation D1238, Condition E
Density	ASTM Designation D 1505 for polyethylene ASTM Designation D 792 for polypropylene

Capacity test. The pail shall be filled to capacity (within 1/4 inch of the top) with measured amounts of water. Failure to contain 14 quarts shall constitute failure of this test.

Diametral deflection test. The outside diameter of the pail which extends through the centers of the bail attachment holes of the body shall be measured. The pail shall then be filled with water to capacity. The water temperature shall be 130° plus or minus 5° F (55° plus or minus 2°C). The pail shall be emptied after 5 minutes and refilled as specified above. After 2 minutes, the pail shall be lifted and the shorter deflected outside diametral dimension shall be measured while the pail is suspended. A diametral deflection is excess of 2 inches, evidence of leakage, or detachment of the bail shall constitute failure of this test.

Drop test. The pail shall be filled to capacity with crushed ice. After 15 minutes of time have elapsed, pail shall be raised to a height of 3 feet above a concrete floor and tilted at an angle of 45 plus or minus 2 degrees. The pail shall be released and allowed to fall freely, with the bottom pail edge striking the concrete. Any crack, permanent set, or dislodgement of the bail shall constitute failure of this test.

Leakage. The pail shall be filled to capacity with water and allowed to stand for not less than 1 hour. Evidence of leakage shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580, as amended, and as implemented by Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

NOTE: The following National Stock Number is covered by this document:

7240-00-023-8570

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be specified in the contract and/or order.

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD - MB

Agent:

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
PHS
FDA-MPQAS

Project No. 7240-0248

Location: CID/PAIL/PLASTIC/H13-32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4956 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
ATTN DPSC-RSTE
2800 South 20th Street
Philadelphia, Pennsylvania 19101-8419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

Fold along this line

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4956 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
ATTN DPSC-RSTE
2800 South 20th Street
Philadelphia, Pennsylvania 19101-8419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:25Z
Check the source to verify that this is the current version before use.