FED. SUP CLASS
4820

REVIEWERS: AT, CS, ME, MU
USERS: AV, MC

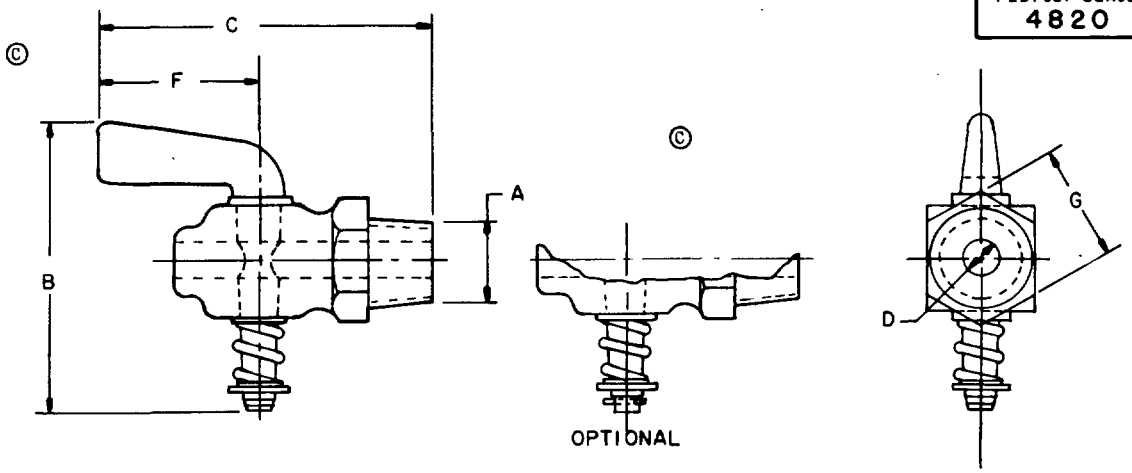


TABLE I

DASH NUMBER		A	B	C	D	F	G
PHOR BZ	C. STEEL OR CRES	PIPE THREAD NPTF	MAX	MAX	DIA MIN	MAX	ACROSS FLATS ±.015
1	-	1/8-27	1.75	1.91	.16	1.00	.44 or .50
2	**6	1/4-18	1.88	2.47	.19	1.22	.62 or .56
3	-	3/8-18	2.75	2.97	.23	1.50	.88, .75 or .69
~~4~~	-	~~1/2-14~~	~~2.44~~	~~3.25~~	~~.50~~	~~1.50~~	~~1.00 or .91~~

©* INACTIVE AFTER 28 MARCH 1977. NO SUPERSEDING STANDARD.

NOTES:

©1. MATERIAL: Body, Handle, Stem and Screw - Brass, manufacturer's standard
Washer, Spring Retainer and Pin - Manufacturer's standard
Spring - Phosphor Bronze, QQ-W-321, Alloy Number 510, or
Carbon Steel, QQ-W-428, or
Corrosion Resisting Steel, QQ-W-423, Composition 302, 304, 305, 316, 321, 347: Condition B.

2. PROTECTIVE COATING: Uncoated
Cadmium or Zinc - (For carbon steel spring only) Cadmium, QQ-P-416, Type II, Class 2 or Zinc, QQ-Z-325, Type II, Class 2.

3. THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.

4. DIMENSIONS: Unless otherwise specified all dimensions are in inches.

5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS35784-1.

6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

7. Reference documents shall be of the issue in effect on date of invitations for bid.

8. This item if for use in liquid or gas systems where the pressure does not exceed 50 p.s.i. and the liquid or gas is compatible with brass.

©**9. CAUTION: If other than phosphor bronze spring is used be aware of possible spark and explosion.

10. The illustration is for identification purposes only and is not intended to restrict designs or shapes not dimensioned.

INTERCHANGEABILITY

After 23 March 1966 these AN part numbers are superseded by the specified MS part numbers. The replaced AN part numbers should be used until existing stock is depleted. For new design use only the superseding MS part numbers.

TABLE II

PART NUMBERS CANCELLED		PART NUMBERS SUPERSEDING	PART NUMBERS CANCELLED		PART NUMBERS SUPERSEDING
AN770-1	AN770-A1	MS35784-1	AN770-3	AN770-A3	MS35784-3
AN770-2	AN770-A2	MS35784-2	AN770-4	AN770-A4	MS35784-4

© Denotes changes.

APPROVED 19 JULY 1956 REVISED (A) 23 MARCH 1966 (B) 30 MARCH 1973 © 28 MARCH 1977

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. WC Other Cust SH 99	TITLE COCK, DRAIN, SPRING KEY, 50 P.S.I.	MILITARY STANDARD MS35784
PROCUREMENT SPECIFICATION MIL-C-1203	SUPERSEDES: AN770 and CDAX1 in part	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4820-0340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.