INCH-POUND
A-A-59126/31A
22 APR 2013
SUPERSEDING
A-A-59126/31
26 Sep 1977

# COMMERCIAL ITEM DESCRIPTION SHEET

## TERMINALS, STUD, TRIPLE TURRET
## (NONINSULATED, SWAGE MOUNTED)
## STYLE SE31

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE31 of MIL-T-55155/31 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

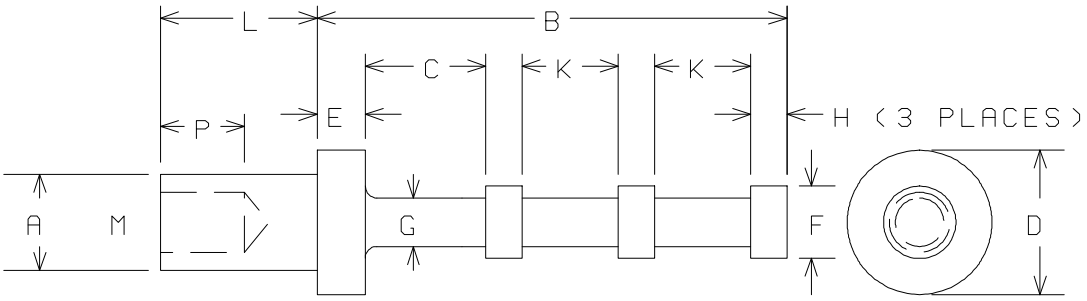



Figure 1. Drawing.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

| PART NUMBER | Mounting board thickness (REF) | A ±.002 | B ±.015 | C ±.010 | D ±.005 | E ±.005 | F ±.005 | G ±.010 | H ±.005 | K ±.005 | L ±.005 | M ±.003 | P ±.003 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AA59126/31-01 | 1/32 | .090 | .301 | .093 | .125 | .023 | .093 | .047 | .020 | .062 | .062 | .064 | .062 |
| AA59126/31-02 | | .112 | .484 | .156 | .187 | .047 | .145 | .065 | .031 | .093 | .078 | .076 | .093 |
| AA59126/31-03 | 1/16 | .090 | .301 | .093 | .125 | .023 | .093 | .047 | .020 | .062 | .093 | .064 | .062 |
| AA59126/31-04 | | .112 | .484 | .156 | .187 | .047 | .145 | .065 | .031 | .093 | .109 | .076 | .093 |
| AA59126/31-05 | 3/32 | .090 | .301 | .093 | .125 | .023 | .093 | .047 | .020 | .062 | .125 | .064 | .062 |
| AA59126/31-06 | | .112 | .484 | .156 | .187 | .047 | .145 | .065 | .031 | .093 | .140 | .076 | .093 |
| AA59126/31-07 | 1/8 | .090 | .301 | .093 | .125 | .023 | .093 | .047 | .020 | .062 | .156 | .064 | .062 |
| AA59126/31-08 | | .112 | .484 | .156 | .187 | .047 | .145 | .065 | .031 | .093 | .171 | .076 | .093 |
| AA59126/31-09 | 5/32 | .112 | .484 | .156 | .187 | .047 | .145 | .065 | .031 | .093 | .195 | .076 | .093 |
| AA59126/31-10 | 3/16 | .090 | .301 | .093 | .125 | .023 | .093 | .047 | .020 | .062 | .218 | .064 | .062 |
| AA59126/31-11 | | .112 | .484 | .156 | .187 | .047 | .145 | .065 | .031 | .093 | .234 | .076 | .093 |
| AA59126/31-12 | 1/4 | .112 | .484 | .156 | .187 | .047 | .145 | .065 | .031 | .093 | .296 | .076 | .093 |

Type of mounting: swage.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 0.015 inch.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Table I. Substitutability data.

| Part number in A-A-59126/31 | Part number in MIL-T-55155/31A |
|---|---|
| AA59126/31X-01 | M55155/31X-01 |
| AA59126/31X-02 | M55155/31X-02 |
| AA59126/31X-03 | M55155/31X-03 |
| AA59126/31X-04 | M55155/31X-04 |
| AA59126/31X-05 | M55155/31X-05 |
| AA59126/31X-06 | M55155/31X-06 |
| AA59126/31X-07 | M55155/31X-07 |
| AA59126/31X-08 | M55155/31X-08 |
| AA59126/31X-09 | M55155/31X-09 |
| AA59126/31X-10 | M55155/31X-10 |
| AA59126/31X-11 | M55155/31X-11 |
| AA59126/31X-12 | M55155/31X-12 |

The complete part number shall include the symbol for insulation color (X denoted since non-insulated), and the symbol for material and finish IAW the requirements of CID A-A-59126.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army - CR
Air Force - 85
DLA - GS

Preparing Activity:
Army - CR

(Project No. 5940-2013-011)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.