(PROJECT NO. 3120-0368)

3120

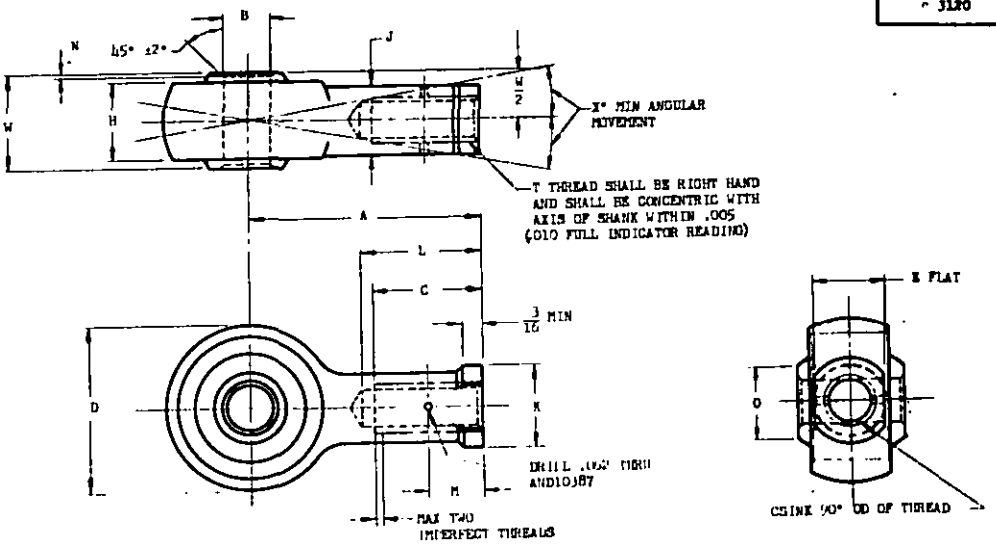

ENGINEERING DATA

AN PART NO.	RADIAL TEST LOADS LBS NON-DEFORMATION (b) LOAD	RADIAL TEST LOADS LBS ULTIMATE	AXIAL TEST LOADS LBS NON-DEFORMATION (b) LOAD	AXIAL TEST LOADS LBS ULTIMATE
AN943-3	660	1 300	460	920
AN943-4	1100	2 200	760	1520
AN943-5	2100	4 200	1480	2960
AN943-6	3200	6 400	2240	4430
AN943-8	4500	9 000	3160	6320
AN943-10	5700	11 400	4000	8000

AN PART NO.	BORE SIZE NOM.	A ±.031	B +.0000 -.0005 DIA	C +.062 -.031	D MAX DIA	E +.002 -.003	H MAX	J +.003 -.010 DIA	K +.000 -.005 DIA	L ±.010	M ±.031	(a) N +.015 -.000	O MIN DIA	T THREAD NF-3	W +.000 -.005	X° MIN
AN943-3	NO. 10	1.375	.1895	.688	.781	.375	.328	.370	.438	.813	.312	.010	.312	1/4 -28	.437	9°15'
AN943-4	1/4	1.375	.2495	.688	.938	.438	.468	.433	.500	.813	.312	.022	.375	5/16-24	.625	10°30'
AN943-5	5/16	1.625	.3120	.750	1.250	.438	.656	.433	.500	.875	.375	.022	.469	5/16-24	.812	11°30'
AN943-6	3/8	2.000	.3745	.938	1.500	.562	.750	.557	.656	1.063	.438	.022	.562	3/8 -24	.937	10°15'
AN943-8	1/2	2.375	.4995	1.125	1.750	.750	.812	.745	.875	1.250	.562	.032	.750	1/2 -20	1.000	9° 0'
AN943-10	5/8	2.750	.6245	1.375	2.000	.875	.937	.870	1.031	1.500	.688	.044	.938	5/8 -18	1.125	10°30'

(a) A RADIUS GIVING THE SAME FILLET CLEARANCE WILL BE ACCEPTABLE.

(b) APPLY LOAD FOR ONE MINUTE.

MATERIAL: STEEL; SEE PROCUREMENT SPECIFICATION.

FINISH: CADMIUM PLATE; SPECIFICATION QQ-P-416 OR ZINC PLATE SPECIFICATION AN-P-32. SEE PROCUREMENT SPECIFICATION.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.005.

Ⓐ INACTIVE FOR DESIGN AFTER 14 MAY 71 NO SUPERSEDING STD.
(SEE MIL-STD-32)

APPROVED 28 Feb 50 REVISED Ⓐ 14 MAY 71

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN943
MIL-B-5629	BEARING – ROD END, INTERNAL THREAD, SELF-ALIGNING, PLAIN, AIRFRAME	

☆ U.S. GOVERNMENT PRINTING OFFICE: 1971-433-895/7334

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTICE: This document was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This standard supersedes all coordinated standard drawings for the same product and shall become effective for the procurement of coordinated supplies, or for use in new designs, not later than 6 months after the issue date of approved sheets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.