INCH-POUND

MIL-B-52467C(ME)
28 November 1988
SUPERSEDING
MIL-B-52467B(ME)
26 January 1981

MILITARY SPECIFICATION

BAR, CARRYING: LIGHT TACTICAL BRIDGE

This specification is approved for use within the USA Belvoir Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a carrying bar to be used with the light tactical floating bridge.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corners.
PPP-B-636	- Box, Fiberboard.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATIN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5420
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:19Z
Check the source to verify that this is the currentversion before use.

MILITARY

MIL-T-704 - Treatment and Painting of Materiel.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking Waterproofing with Appropriate Test Methods.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN; NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Section IX, Welding and Brazing Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN WELDING SOCIETY (AWS)

A5.1 - Covered Carbon Steel Arc-Welding Electrodes.
A5.18 - Carbon Steel Filler Metals for Gas Shielded Arc-Welding.
D1.1 - Structural Welding Code-Steel.

(Application for copies should be addressed to the American Welding Society, 550 N.W. LeJune Road, P. O. B ox 351040, Miami, FL 33135.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A36 - Structural Steel.
A53 - Seamless and Welded Black and Hot-Dipped Zinc-Coated Steel Pipe.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:19Z
Check the source to verify that this is the currentversion before use.

STEEL STRUCTURES PAINTING COUNCIL (SSPC)

SSPC-SP-6 - Commercial Blast Cleaning.

(Application for copies should be addressed to the Steel Structures Painting Council, 4400 Fifth Avenue, Pittsburg, PA 15213.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The carrying bar shall be as shown in figure 1 and as specified herein.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.2) in accordance with 4.4.

3.3 Material. Material shall be as specified herein and as shown on figure 1. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the carrying bar may be newly fabricated form recovered materials to the maximum extent practicable, provided the carrying bar produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the carrying bar.

3.4 Welding electrodes. Welding electrodes shall conform to AWS A5.1 or A5.18, classification E60 or E70 series, size as required.

3.5 Identification marking. The carrying bar shall be metal-die stamped as shown on the figure. Die stamping shall be legible after painting.

3.6 Cleaning treatment and painting.

3.6.1 Cleaning. The carrying bar shall be cleaned prior to painting by sand blasting in accordance with Steel Structures Painting Council Surface Preparation Specification SSPC-SP-6.

3.6.2 Treatment and painting. The carrying bar shall be treated and painted in accordance with MIL-T-704, type B.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:19Z
Check the source to verify that this is the current version before use.

3.7 Workmanship.

3.7.1 Steel fabrication. Steel may be cut by shearing, sawing, or flame cutting. Burned surfaces of flame-cut material shall be ground or machined to remove cooling checks. All burrs shall be removed.

3.7.2 Welders and welding.

3.7.2.1 Welders. Before assigning any welder or welding operator welding work covered by this specification, the contractor shall obtain certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the materials joined and the type of welding operation to be performed and that such qualification is effective as defined by the particular code:

AWS D1.1 Structural Welding Code - Steel
ASME Boiler and Pressure Vessel Code, Section IX

Contractors who only make horizontal welds need not qualify welders for "all position welding." In the event of evidence of poor welds, the Government reserves the right to require re-testing of any welder or welding operator. The test results shall be made available for review by the contracting officer or the contracting officer's representative.

3.7.2.2 Welding. The surfaces of parts to be welded shall be free form scale, paint, grease, and other foreign matter. Welding shall be done by the shielded metal-arc or gas metal-arc (MIG) process and shall conform to the provisions of the American Welding Society "D1.1 Structural Welding Code-Steel" publication. All welded parts shall be free from cracks and other imperfections that may reduce the effectiveness of the part. Work shall be positioned for flat welding when practicable. Before welding over previously deposited weld metal, all traces of slag shall be removed and the deposit and adjoining base metal shall be wirebrushed clean.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspection set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.2.1 First article examination. The first article carrying bar shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in 4.5.1. AQL shall be 1.0 percent defective for major defects.

4.5 Inspection procedure.

4.5.1 Examination. The carrying bar shall be examined for the following defects:

Major

101. Nonconformance to the dimensions shown on the figure.
102. Material not as specified.
103. Workmanship not as specified.
104. Identification marking incorrect, missing or illegible.
105. Treatment and painting not as specified.
106. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the carrying bar.
107. Welders certification not made available to the contracting officer.
108. Welding electrodes not as specified.
109. Welders and welding not as specified.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:19Z
Check the source to verify that this is the currentversion before use.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following major defects. AQL shall be 1.0 percent defective.

110. Containers not as specified for level A or B.
111. Quantities packed together not as specified for level A, B or C.
112. Bars not secured within the box as specified for level A and B.
113. Strapping not as specified for level A or B.
114. Marking missing, illegible, incorrect, or incomplete.

5. PACKAGING

5.1 Preservation. The carrying bars require no preservation.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. The bars shall be packed together in quantities of eight, in a close-fitting box conforming to PPP-B-621, class 2, style 4 or PPP-B-601, overseas type, style A. The bars shall be blocked and braced within the box to prevent movement in accordance with MIL-STD-1186. Box closure and strapping shall be in accordance with the appendix to the box specification. Strapping shall conform to QQ-S-781, class 1, type I of IV, finish B size as applicable.

5.2.2 Level B. The bars shall be packed together in quantities of eight, in a close-fitting box conforming to PPP-B-636, type CF, class weather-resistant, grade VII c, style optional. The bars shall be blocked or cushioned within the box in accordance with MIL-STD-1186. Box closure and strapping shall be in accordance with the appendix to the box specification.

5.2.3 Level C. The carrying bars shall be shipped individually, in bundles, or in containers. If bundled, the bars shall be arranged so as to occupy the minimum cube. Bundles shall be secured together with an appropriate size of steel strapping. No more than eight bars shall be placed in bundle or in a container.

5.3 Marking. Marking for shipment and storage shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The carrying bar is intended for use in facilitating the carrying of the panels during erection and dismantling of the light tactical floating bridge.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:19Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. Time frame required for submission of the first article model, and number of carrying bars required (see 3.2).
d. Level of packaging required (see 5.2).

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Subject term (key word) listing.

Bar, carrying
Light tactical floating bridge

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 5420-A361

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:19Z
Check the source to verify that this is the current version before use.

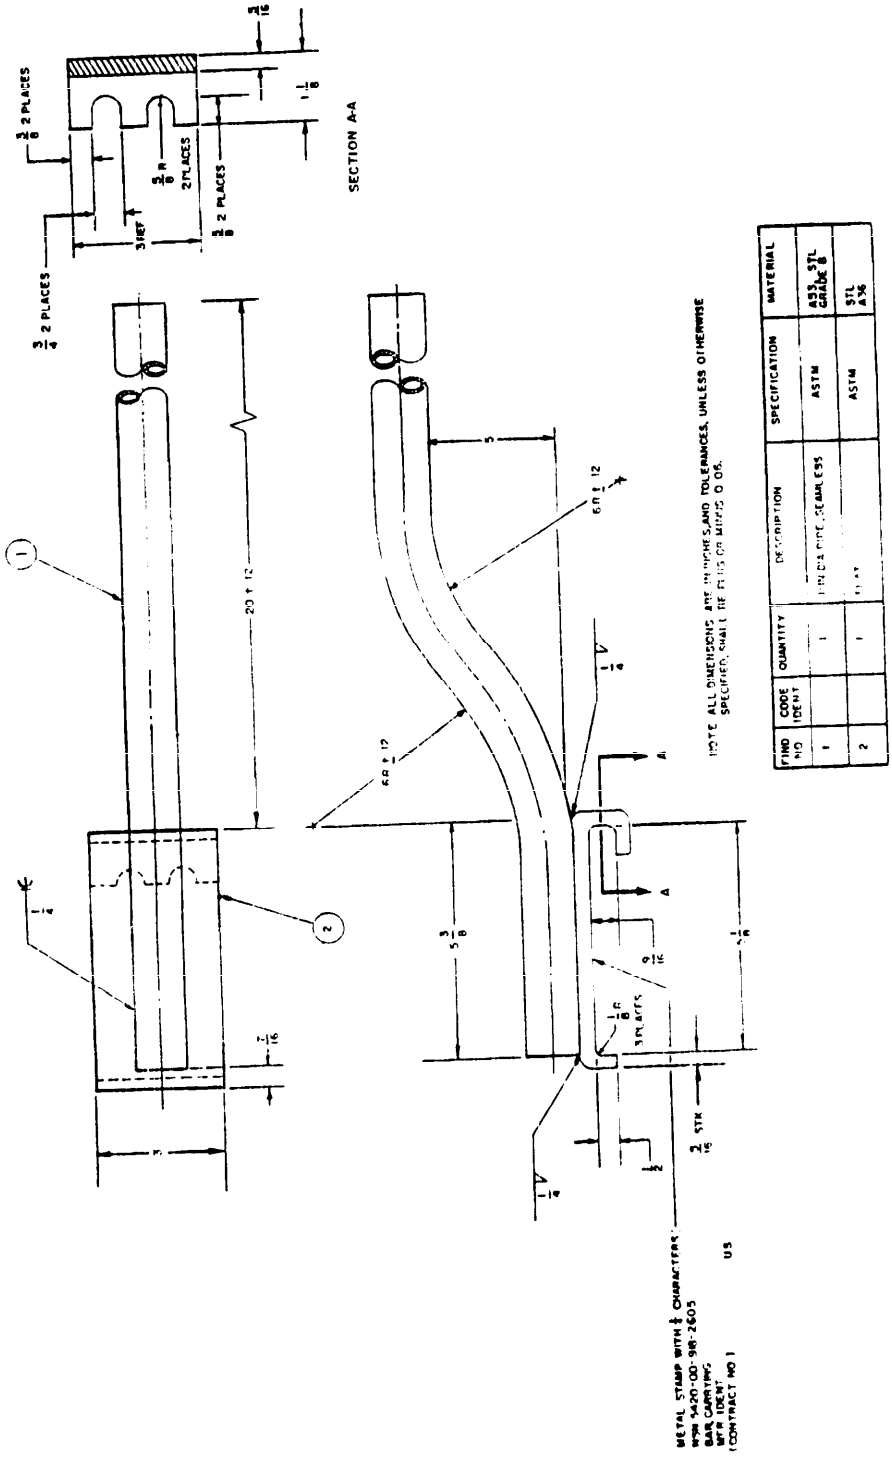


FIGURE 1. Bar, carrying: light tactical bridge. X-3693

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-B-52467C(ME)	Bar, Carrying: Light Tactical Bridge

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 20260-22T21:19Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Belvoir RDE Center
STRBE-TSE
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.