November 1, 1962

SUPERSEDING
Int. Fed. Spec. CCC-C-00435a (Army-QMC)
February 26, 1962 and
Fed. Spec. CCC-C-435
May 24, 1957

FEDERAL SPECIFICATION

CLOTH, COTTON, SHEETING (LAUNDRY COVER CLOTH)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements of unbleached, laundry, cotton sheeting.

1.2 Classification.

1.2.1 *Type and classes.* The cotton cloth sheeting covered by this specification shall be of one type and two classes as specified (see 6.2):

Class 1.—72 inches wide.

Class 2.—90 inches wide.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

Federal Specifications:

CCC-T-191—Textile Test Methods.
PPP-P-51—Packaging, Packing, and Marking of Textile Fabrics (Woolens, Worsteds, Cottons, Silks, and Synthetics).

Federal Standards:

Fed. Std. No. 4—Glossary of Fabric Imperfections.
Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards and Handbooks from established distribution points in their agencies.)

Military Standard:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

FSC 8305

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:29Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 **Other publications.** The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation of bids shall apply.

Rules and Regulations Under the Textile Fiber Products Identification Act.

(Copies may be obtained free of charge from the Federal Trade Commission, Washington 25, D. C.).

3. REQUIREMENTS

3.1 **Material.**

3.1.1 *Yarn.* The yarn shall be made from clean cotton, carded, drawn, and spun into singles yarn.

3.2 **Color.** The cloth shall be unbleached.

3.3 **Physical requirements.** The finished cloth shall conform to the requirements shown in table I when tested as specified in 4.4.

TABLE I.—*Physical requirements*

Weight per square yard	Yarns per inch (minimum)[1]		Breaking strength (grab method) (minimum)	
	Warp	Filling	Warp	Filling
Ounces			*Pounds*	*Pounds*
6.9 min. 7.3 max.	56	58	85	100

[1] A minus tolerance of 6 yarns per inch in either the warp or filling will be permitted providing there is a total of not less than 114 yarns per inch (warp and filling).

3.4 **Width tolerance.** The width tolerance for the specified classes shall be as follows:

Class 1.—plus 1½ inches, minus ¾ inch.

Class 2.—plus 1¾ inches, minus 1 inch.

3.5 **Weave.** The weave shall be plain.

3.6 **Non-fibrous material.** The total sizing, finishing, and other nonfibrous material content of the finished cloth shall not exceed 13.0 percent when tested as specified in 4.4.

3.7 **Length.** The cloth shall be furnished in either flat folds, bolts (for civilian agencies only), or rolls as specified in PPP-P-51 and, unless otherwise specified, shall be in one continuous piece of not less than 50 yards (see 6.2).

3.8 **Fiber identification.** Each piece or roll of cloth shall be labeled, ticketed, or invoiced for fiber content in accordance with the Rules and Regulations Under the Textile Fiber Products Identification Act (see 2.2).

3.9 **Workmanship.** The finished cloth shall conform to the quality and grade of product established by this specification and the occurrence of defects shall not exceed the point level specified.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Contractor's inspection responsibility.** The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Examination of the end item.** Except when otherwise specified by civil government agencies, examination of the end item shall be in accordance with the provisions of MIL-STD-105 and 4.2.1 through 4.2.3.

4.2.1 *Yard-by-yard examination.* The required yardage of each piece or bolt or roll

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:29Z
Check the source to verify that this is the current version before use.

shall be examined on the face side and all defects as defined in Fed. Std. No. 4 which are clearly noticeable at normal inspection distance (3 feet) shall be scored and assigned demerit points as listed in 4.2.1.1, except that spots, stains, and streaks shall be counted regardless of cause, i.e., not restricted to rust, oil, or grease and only those slubs and knots which exceed the maximum acceptable limits shown for each shall be scored (4.2.1.2). Defects on the selvage shall not be scored unless the body of the cloth is affected. No yard shall be penalized more than four points. For purposes of this examination, a yard shall begin at the last scored defect. The sample unit for this examination shall be one linear yard. The sample size shall be 750 linear yards, regardless of lot size. The sample yardage shall be examined in 25 pieces, rolls, or bolts selected from 25 containers. An approximate equal number of yards shall be examined in each piece, roll, or bolt of the sample. The lot shall be unacceptable if the points per hundred square yards exceed the following value:

35.0 points

Point computation shall be as follows:

$$\frac{\text{Total points scored in sample size} \times 3600}{\text{Sample size (yards)} \times \text{contracted width of the material}} = \text{Points per 100 square yards.}$$

4.2.1.1 *Demerit points.* Demerit points shall be assigned as follows:

For defects up to 3 inches in any dimension —one point

For defects exceeding 3 inches, but not exceeding 6 inches in any dimension —two points

For defects exceeding 6 inches, but not exceeding 9 inches in any dimension —three points

For defects exceeding 9 inches in any dimension—four points

NOTE: The following defects, when present, shall be scored four points for each yard in which they occur:

Baggy, ridgy, or wavy cloth.
Objectionable odor.
Width beyond specified tolerances.
Excessive neppiness.

4.2.1.2 *Limits of slubs and knots.* Only slubs and knots which exceed the limits shown on figure 1 shall be scored.

4.2.2 *Examination for length.*


4.2.2.1 *Individual pieces or rolls.* During the yard by yard examination, each piece or bolt or roll in the sample shall be examined for gross length. Any gross length found to be less than the minimum specified or more than two yards below the gross length marked on the ticket shall be considered a defect with respect to length. The lot shall be unacceptable if two or more pieces, rolls or bolts in the sample are defective in respect to length.

4.2.2.2 *Total yardage in sample.* The lot shall be unacceptable if the total of the actual gross lengths of pieces, rolls, or bolts in the sample is less than the total of the gross lengths marked on the piece, roll or bolt tickets.


4.2.3 *Examination for compliance with the Rules and Regulations Under the Textile Fiber Products Identification Act.* During the yard-by-yard examination, each piece, roll, or bolt shall be examined for conformance to the Rules and Regulations Under the Textile Fiber Products Identification Act. Each piece, roll, or bolt not labeled in accordance with this act shall be a defect. The lot shall be unacceptable if two or more of these defects occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:29Z
Check the source to verify that this is the current version before use.

Slub

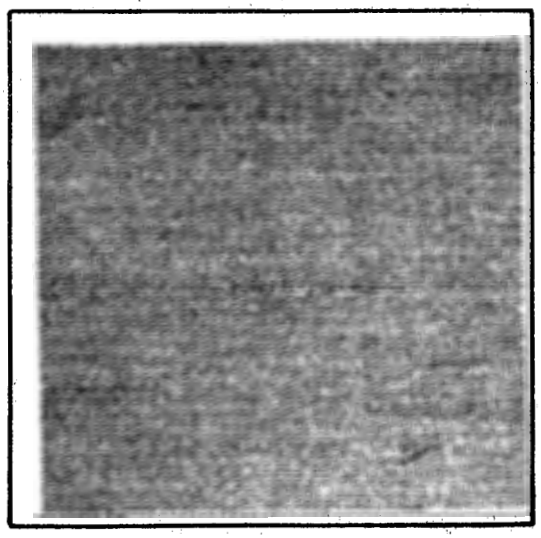

Slub (Loose, Thick)

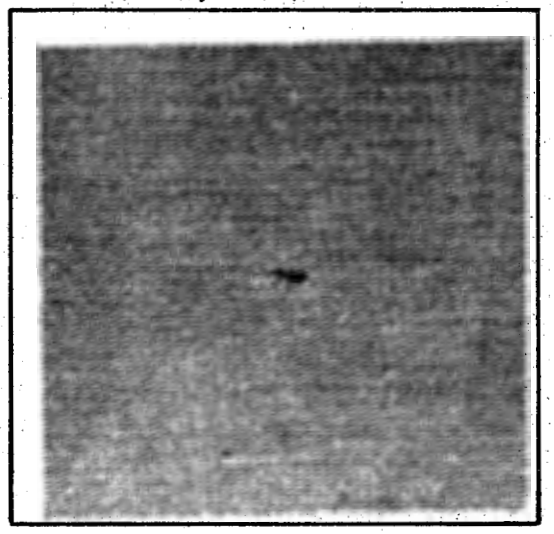

Lump or Knot (Fuzz)

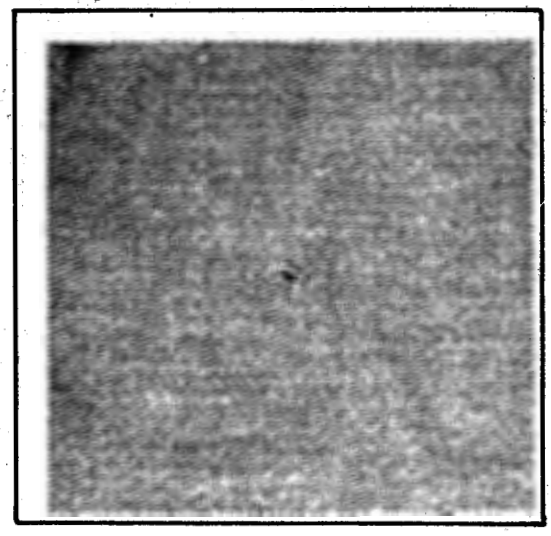


Figure 1 (Limits of Acceptability)

4.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be L-4 and the AQL shall be 4.0 defects per 100 units of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:29Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Weight	Gross/net weight exceeds requirement.

4.4 Testing of end item. The methods of testing specified in CCC-T-191, wherever applicable, and as listed in table II shall be followed. The physical and chemical values specified in Section 3 apply to the average of the determinations made on a sample unit for test purposes as specified in the applicable test method. The sample unit shall be 1 continuous yard, full width of the finished cloth. The sample size (number of sample units) shall be as shown in the table below. The lot size shall be expressed in units of 1 yard. The lot shall be unacceptable if one or more units fail to meet any requirement specified.

Lot size (yards)	Sample size
800 or less	2
801 to 22,000	3
22,001 and over	5

TABLE II.—*Tests*

Characteristic	Requirements reference	Test method
Weave[1]	3.5	Visual
Yarns per inch	Table I	5050
Weight ounce per square yard	Table I	5041
Breaking strength (pounds)	Table I	5100
Nonfibrous material	3.6	2611

[1] One determination shall be made on each sample unit and the result reported as "pass" or "fail."

5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to for definitions and applications of the various levels of packaging and packing for civilian procurements.)

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 *Levels A, B, and C.* The cloth put up in flat folds, bolts, or rolls, shall be packaged in accordance with the applicable requirements for class 3 fabrics of PPP-P-51.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Levels A, B, and C.* Cloth of one class only shall be packed in accordance with the applicable requirements of PPP-P-51.

5.3 Marking. In addition to any special marking required by the contract or order, shipments shall be marked in accordance with the applicable requirements of PPP-P-51.

6. NOTES

6.1 Intended use. The cloth covered by this specification is intended for use as surface covering on flatwork ironers.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Class of cloth required (see 1.2.1).

(*c*) Put up and any exception to length of pieces (see 3.7).

(*d*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Level B packaging and packing shall be used by ordering agencies only when shipment is known to be made to a holding

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:29Z
Check the source to verify that this is the current version before use.

Supply Depot or Warehouse from which partial shipments will be made to ultimate consumers.

6.4 **Transportation description.** The transportation description and minimum weights applicable to this commodity are:

Rail:

Cotton piece goods, finished, not otherwise indexed by name, in the original piece.

Carload minimum weight—any quantity.

Motor:

Cotton piece goods, not otherwise indexed, in the original piece.

Motor volume minimum weight — any quantity.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTEREST:

Army—M Q

Navy—S

Air Force—ASD - MAA

Copies of this specification may be purchased for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:29Z
Check the source to verify that this is the current version before use.