FED. SUP CLASS
9540

USER ACTIVITIES:
NAVY-OS, SH

REVIEW ACTIVITIES:
AIR FORCE - 84
DLA

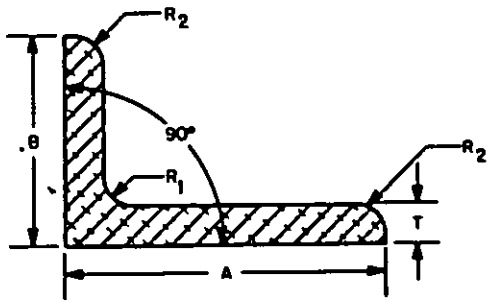


TABLE I. DASH NUMBERS.

DASH NO.	A	B	T	R_1	R_2	TYPE
001	.500	.500	.063	.063	.063	13511
003	.562	.562	.040	.040	.040	13511
005	.625	.500	.063	.063	.063	13511
007	.625	.500	.063	.063	.063	13511
009	.625	.500	.050	.063	.050	13511
011	.625	.625	.063	.094	.063	13511
013	.700	.600	.040	.063	SQUARE	13511
015	.750	.500	.063	.063	.063	13511
017	.750	.500	.063	.063	.063	13511
019	.750	.625	.063	.063	.063	13511
021	.750	.750	.125	.094	.094	13511
023	.750	.750	.094	.094	.094	0
025	.750	.750	.094	.094	.094	13511
027	.750	.750	.094	.094	.094	13511
029	.875	.500	.063	.063	.063	13511
031	.875	.500	.063	.063	.063	13511
033	.875	.625	.063	.125	.063	13511
035	.875	.875	.094	.094	.094	13511
037	.875	.875	.125	.094	.125	13511
039	.875	.875	.094	.094	.094	13511
041	.875	.875	.063	.094	.063	13511
043	1.000	.500	.063	.125	.063	13511
045	1.000	.500	.051	.062	.031	0
047	1.000	.625	.063	.125	.063	13511
049	1.000	.750	.063	.125	.063	13511
051	1.000	.750	.070	.062	.031	13511
053	1.000	.750	.070	.062	.031	13511
055	1.000	.750	.070	.062	.031	0
057	1.000	.750	.125	.125	.125	13511
059	1.000	.750	.125	.125	.125	13511
061	1.000	.750	.040	.063	SQUARE	13511
063	1.000	.875	.094	.125	.094	13511
065	1.000	.875	.063	.125	.063	13511
067	1.000	.875	.125	.125	.125	13511
069	1.000	.875	.063	.125	.063	13511
071	1.000	1.000	.094	.188	.094	0
073	1.000	1.000	.094	.188	.094	13511
075	1.000	1.000	.050	.062	SQUARE	0
077	1.000	1.000	.050	.062	SQUARE	13511
079	1.000	1.000	.050	.062	SQUARE	13511
081	1.000	1.000	.188	.188	.188	0
083	1.000	1.000	.063	.188	.063	0

APPROVED 29 Feb 1984 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A.	AS
Other Cost	MR
	99

INTERNATIONAL INTEREST

TITLE: ANGLE, SHAPE STYLE I
ALUMINUM ALLOY 2024

MILITARY STANDARD
MS14284

PROCUREMENT SPECIFICATION: QQ-A-200

SUPERSEDES

PAGE 1 OF 4

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9540-0089

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:39Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS. (CONTINUED)

DASH NO.	A	B	T	R_1	R_2	TEMPER
085	1.000	1.000	.063	.188	.063	T8511
087	1.000	1.000	.125	.125	.094	0
089	1.000	1.000	.063	.125	SQUARE	T3511
091	1.000	1.000	.063	.188	.063	T3511
093	1.000	1.000	.125	.188	.125	T3511
095	1.000	1.000	.125	.188	.125	0
097	1.125	.625	.050	.062	.031	T3511
099	1.125	.875	.094	.125	.094	T3511
101	1.125	.875	.094	.125	.094	T8511
103	1.125	.875	.094	.125	.094	0
105	1.125	.875	.063	.125	.063	T3511
107	1.150	1.000	.100	.125	SQUARE	T8511
109	1.250	.750	.094	.125	.094	T3511
111	1.250	.750	.063	.125	.063	T3511
113	1.250	.750	.051	.062	SQUARE	T3511
115	1.250	.750	.051	.062	SQUARE	T8511
117	1.250	1.000	.125	.125	.125	T8511
119	1.250	1.000	.094	.125	.094	0
121	1.250	1.000	.125	.125	.125	T3511
123	1.250	1.125	.090	.090	SQUARE	T8511
125	1.250	1.250	.094	.188	.094	T8511
127	1.250	1.250	.094	.188	.094	T3511
129	1.270	1.250	.062	.062	SQUARE	0
131	1.270	1.250	.062	.062	SQUARE	T8511
133	1.375	.750	.070	.094	SQUARE	T3511
135	1.375	.875	.094	.156	.094	T8511
137	1.375	.875	.063	.156	.063	0
139	1.375	.875	.063	.156	.063	T3511
141	1.375	.875	.063	.156	.063	T8511
143	1.375	.875	.125	.156	.125	T8511
145	1.375	1.125	.094	.156	.094	T3511
147	1.375	1.125	.063	.156	.063	T3511
149	1.375	1.375	.094	.188	.094	T3511
151	1.375	1.375	.094	.188	.094	T8511
153	1.500	1.000	.094	.156	.094	0
155	1.500	1.000	.063	.156	.063	T3511
157	1.500	1.125	.050	.094	SQUARE	T8511
159	1.500	1.250	.125	.156	.125	0
161	1.500	1.250	.072	.090	.070	T3511
163	1.500	1.250	.072	.090	.070	T8511
165	1.500	1.250	.094	.156	.094	T3511
167	1.500	1.250	.094	.156	.094	T8511
169	1.500	1.250	.063	.156	.063	T3511
171	1.500	1.250	.050	.125	SQUARE	T3511
173	1.500	1.250	.156	.156	.156	T3511
175	1.500	1.500	.125	.188	.125	T8511
177	1.500	1.500	.094	.188	.094	T8511
179	1.500	1.500	.063	.188	.063	T3511
181	1.625	.875	.094	.156	.094	T3511
183	1.625	1.125	.094	.156	.094	T3511
185	1.625	1.375	.094	.156	.094	T3511
187	1.625	1.375	.125	.125	.125	T3511
189	1.750	.750	.062	.125	SQUARE	T8511
191	1.750	.750	.062	.125	SQUARE	0
193	1.750	.750	.062	.125	SQUARE	T3511
195	1.750	1.000	.094	.156	.094	T8511
197	1.750	1.000	.094	.156	.094	T3511

APPROVED 29 Feb 1984 REVISED

USER ACTIVITIES:
NAVY-OS,SH

REVIEWER ACTIVITIES:
AIR FORCE-84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MR 99		ANGLE, SHAPE STYLE I ALUMINUM ALLOY 2024	MS14284
PROCUREMENT SPECIFICATION QQ-A-200	SUPERSEDES:		PAGE 2 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:39Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS. (CONTINUED)

DASH NO.	A	B	T	R_1	R_2	TEMPER
199	1.750	1.125	.064	.125	SQUARE	T3511
201	1.750	1.250	.125	.156	.125	T3511
203	1.750	1.250	.125	.156	.125	T3511
205	1.750	1.500	.156	.156	.156	T3511
207	1.750	1.500	.125	.156	.125	T3511
209	1.750	1.500	.094	.156	.094	T3511
211	1.750	1.750	.094	.250	.094	T3511
213	1.750	1.750	.050	.094	SQUARE	0
215	1.810	1.150	.071	.125	SQUARE	0
217	1.875	.938	.078	.125	.078	T3511
219	1.875	.938	.078	.125	.078	T3511
221	1.875	1.125	.094	.188	.094	T3511
223	1.875	1.375	.125	.188	.125	T3511
225	1.875	1.625	.094	.188	.094	T3511
227	2.000	1.000	.125	.156	.125	T3511
229	2.000	1.250	.250	.188	.250	T3511
231	2.000	1.500	.094	.125	SQUARE	T3511
233	2.000	1.500	.064	.125	SQUARE	T3511
235	2.000	1.500	.064	.125	SQUARE	T3511
237	2.000	1.625	.125	.094	SQUARE	T3511
239	2.000	1.625	.100	.125	SQUARE	T3511
241	2.000	1.625	.100	.125	SQUARE	T3511
243	2.000	2.000	.125	.250	.125	T3511
245	2.000	2.000	.125	.250	.125	T3511
247	2.000	2.000	.094	.250	.094	T3511
249	2.050	.700	.051	.090	SQUARE	T3511
251	2.050	.700	.063	.090	SQUARE	T3511
253	2.120	1.880	.070	.090	.031	T3511
255	2.120	1.690	.070	.090	.031	T3511
257	2.188	.812	.090	.062	SQUARE	T3511
259	2.188	.812	.031	.062	SQUARE	T3511
261	2.250	1.000	.094	.094	SQUARE	T3511
263	2.250	1.000	.094	.094	SQUARE	0
265	2.250	2.250	.125	.250	.125	T3511
267	2.250	2.250	.375	.250	.250	0
269	2.250	2.130	.090	.199	SQUARE	T3511
271	2.350	1.250	.070	.094	SQUARE	0
273	2.500	1.500	.156	.188	.156	T3511
275	2.500	2.000	.250	.250	.250	T3511
277	2.500	2.500	.125	.250	.125	T3511
279	2.500	2.500	.459	.250	.459	T3511
281	2.625	1.750	.072	.125	SQUARE	T3511
283	2.625	1.750	.072	.125	SQUARE	0
285	2.625	1.750	.072	.125	SQUARE	T3511
287	2.710	1.070	.100	.125	SQUARE	T3511
289	3.000	.900	.080	.125	SQUARE	T3511
291	3.000	1.500	.188	.250	SQUARE	T3511
293	3.000	1.800	.063	.125	SQUARE	T3511
295	3.000	2.000	.250	.250	.250	T3511
297	3.500	1.750	.093	.156	SQUARE	T3511
299	3.500	1.750	.093	.156	SQUARE	T3511
301	3.500	3.500	.375	.375	.375	T3511
303	3.750	3.250	.250	.375	.250	T3511
305	4.000	2.500	.125	.125	SQUARE	T3511
307	4.000	2.500	.125	.125	SQUARE	0
309	4.000	2.500	.125	.125	SQUARE	T3511

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

USER ACTIVITIES:
NAVY - OS, SH

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA - IS

APPROVED 29 Feb 1984 REVISED

P. A. AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MR 99		ANGLE, SHAPE STYLE I ALUMINUM ALLOY 2024	MS14284
PROCUREMENT SPECIFICATION QQ-A-200	SUPERSEDES		PAGE 3 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL. ALUMINUM ALLOY 2024 (UNS A92024), AS SPECIFIED IN QQ-A-200/3
2. FORMING PROCESS. EXTRUDED
3. PART NUMBER. THE PART NUMBER CONSIST OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS14284E001

   - 001 — DASH NUMBER FROM TABLE I
   - E — EXTRUDED (SEE REQUIREMENT 2)
   - MS14284 — BASIC MS NUMBER

4. MARKING. ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED WITH THE PRODUCER'S NAME OR REGISTERED TRADE MARK, THE PART NUMBER (MILITARY STANDARD (MS) NUMBER PLUS THE APPLICABLE DASH NUMBER), AND THE LOT NUMBER, AND THIS MARKING SHALL BE APPLIED IN ACCORDANCE WITH FED-STD-184.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. STANDARD LENGTH OF STRUCTURAL ANGLE IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL. EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
NAVY-OS, SH

REVIEWER ACTIVITIES:
AIR FORCE-84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for negotiative use shall be made from this document.

APPROVED 29 Feb 1984 REVISED

P. A. AS / Other Govt MR 99	INTERNATIONAL INTEREST	TITLE: ANGLE, SHAPE STYLE I ALUMINUM ALLOY 2024	MILITARY STANDARD MS14284
PROCUREMENT SPECIFICATION: QQ-A-200	SUPERSEDES:		PAGE 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:39Z
Check the source to verify that this is the current version before use.