MIL-F-52827A(ME)
6 September 1979
SUPERSEDING
MIL-F-52827(ME)
12 July 1974

MILITARY SPECIFICATION

FRAME: SAFELIGHT FILTER, PHOTOGRAPHIC

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a photographic filter frame.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

C-F-206	- Felt Sheet: Cloth, Felt, Wool, Pressed.
L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
FF-H-111	- Hardware, Builders'; Shelf and Miscellaneous.

FSC 6740

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

QQ-S-698	- Steel, Sheet and Strip, Low-Carbon.
PPP-B-601	- Boxes, Wood, Cleated-Plywood
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-T-704	- Treatment and Painting of Materiel.
MIL-B-22191	- Barrier Materials, Transparent, Flexible, Heat Sealable.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1188	- Commerical Packaging of Supplies and Equipment.
MS35821	- Hinge, Butt, Continuous (Piano) .032 Thickness, .063 Pin Dia.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

B 103 - Phosphor Bronze Plate, Sheet, Strip, and Rolled Bar.

(Application for copies should be addressed to the American Society for Testing and Materials, 1616 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Description. The frame shall be as shown on Figures 1 through 6 and as specified herein.

3.2 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.3).

3.2.1 Sheet steel. Sheet steel shall conform to QQ-S-698, Compostion 1020, cold rolled, normalized, commercial quality, No. 1 (matte) finish, cut edges.

3.2.2 Phosphor bronze. Phosphor bronze shall conform to ASTM B103, Alloy UNS No. C524000, strip form, H08 or H10.

3.2.3 Felt. Felt shall conform to C-F-206, Type I, Classification 12 12R3X, 0.062 inch thick, Color Black.

3.3 Hinge. The hinge shall be 20-inches long and shall be in accordance with MS35821, except that it shall be 0.500-inch wide when open.

3.4 Elbow catches. Elbow catches shall conform to FF-H-111, Type F1075A.

3.5 Identification marking. The frame shall be identified in accordance with MIL-STD-130.

3.6 Treatment and painting. The interior and exterior surfaces shall be treated and painted in accordance with MIL-T-704, Type A, Color Lusterless Black.

3.7 Workmanship. Metal used in fabrication shall be clean and smooth and shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause damage to the material. Corners shall be square and true. Surfaces shall be free of burrs or sharp edges and corners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination.

4.3.2.1 Samples. Samples selected in accordance with 4.3.1 shall be examined for the defects specified in 4.4.1. AQL shall be 0.4 percent defective.

4.4 Inspection procedure.

4.4.1 Examination. The frame shall be examined as specified herein for the following defects:

101. Frame not as shown on the figures.
102. Material not as specified.
103. One or more components missing or not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

104. Treatment and painting not as specified.
105. Identification marking, missing, incomplete, or illegible.
106. Workmanship not as specified.

4.5 Inspection of packaging.

4.5.1 Quality conformance of pack.

4.5.1.1 Unit of product. For purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107. Wrapping not as specified for Level A.
108. Containers not as specified.
109. Fiberboard boxes not closed as specified for Level B.
110. Marking illegible, incorrect, incomplete, or missing.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial, as specified (see 6.2).

5.1.1 Level A. The frames shall be wrapped with barrier material conforming to L-P-378, Type I or MIL-B-22191, Type III.

5.1.2 Commercial. The frames shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B, or Commercial, as specified (see 6.2).

5.2.1 Level A. The frames shall be packed in boxes conforming to PPP-B-601, Overseas Type, Grade B, or PPP-B-621, Class 2.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:34Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. The frames shall be packed in fiberboard boxes conforming to PPP-B-636, V3c, or equivalent. The boxes shall be closed Method V of the appendix to the box specification.

5.2.3 Commercial. The frames shall be packed in accordance with MIL-STD-1188.

5.3 Marking. Unit packs and shipping containers shall be marked in accordance with MIL-STD-129 for military levels of protection. For Commercial protection, marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The safelight filter frame is intended for use with a fluorescent ceiling light fixture in the photographic darkroom of a motorized photomapping van. NSN 6740-00-350-3850, which is used in Equipment Set 6675-97-CL-E37, applies thereto.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Degree of prservation and degree of packing required (see 5.1 and 5.2).

6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
DLA - GS

Project 6740-A124

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

X-2921

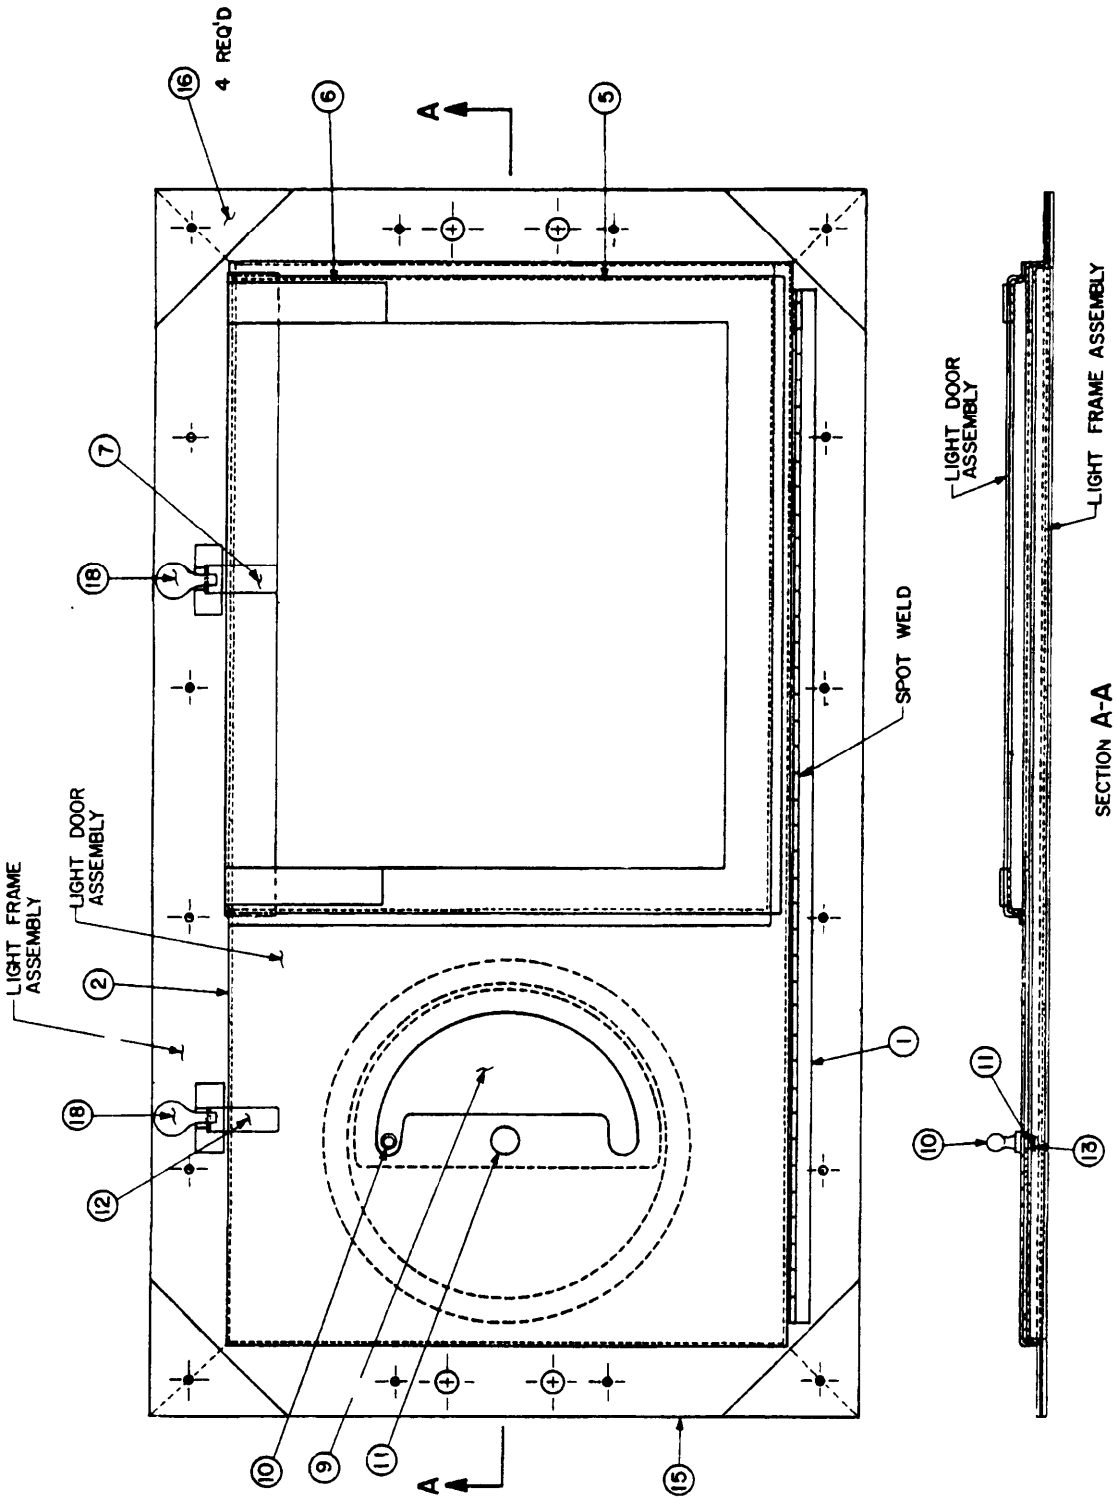


FIGURE 1. Safe light frame, general assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.



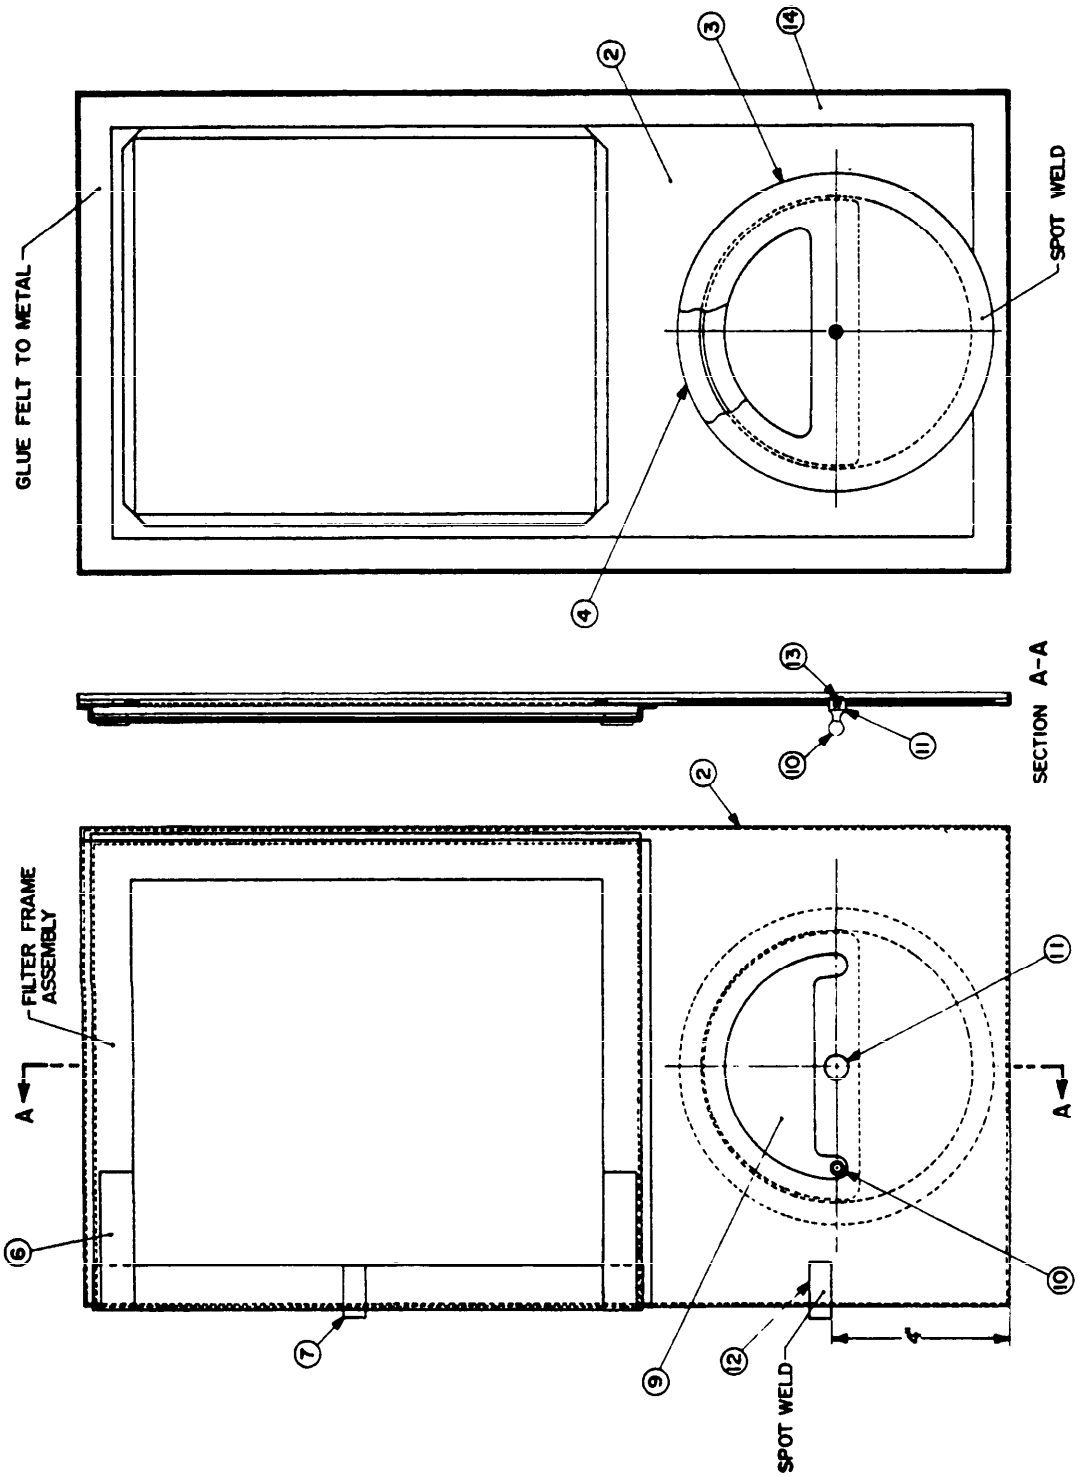


FIGURE 2. Light door assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

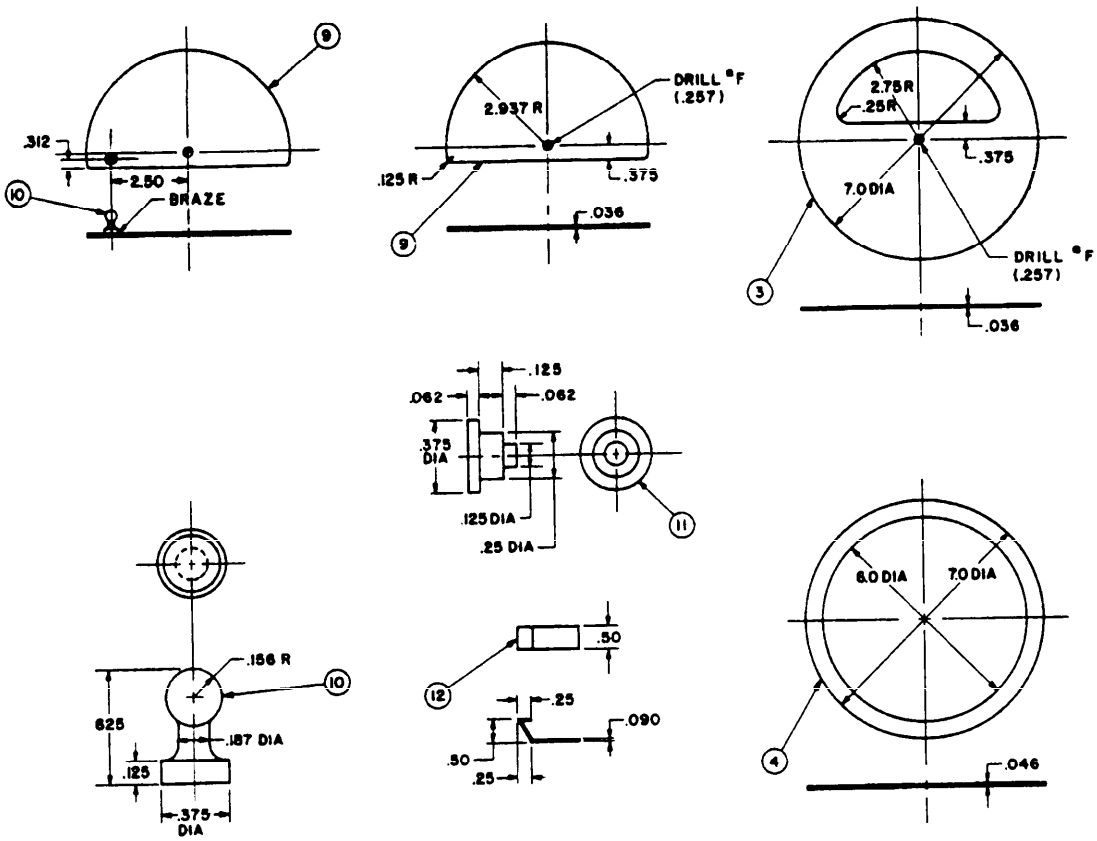

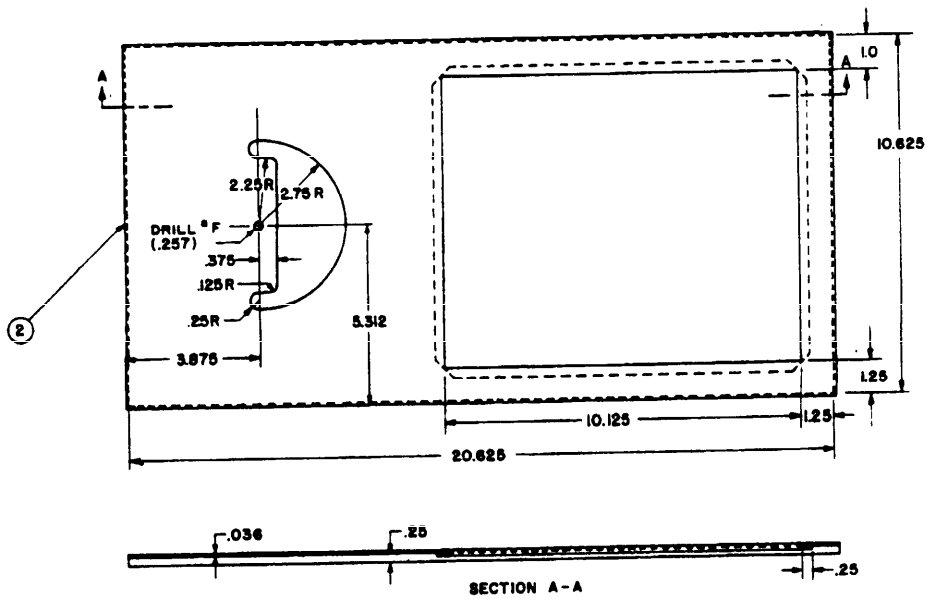

NOTES
1. MODIFY DIMENSIONS AND SHAPE OF FIND NO 12 IF REQUIRED FOR COMPATIBILITY WITH ELBOW CATCH
2. ALL DIMENSIONS IN INCHES
3. FOR LIST OF MATERIALS SEE FIGURE 5

FIGURE 3. Light door assembly details.

X-2923

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.


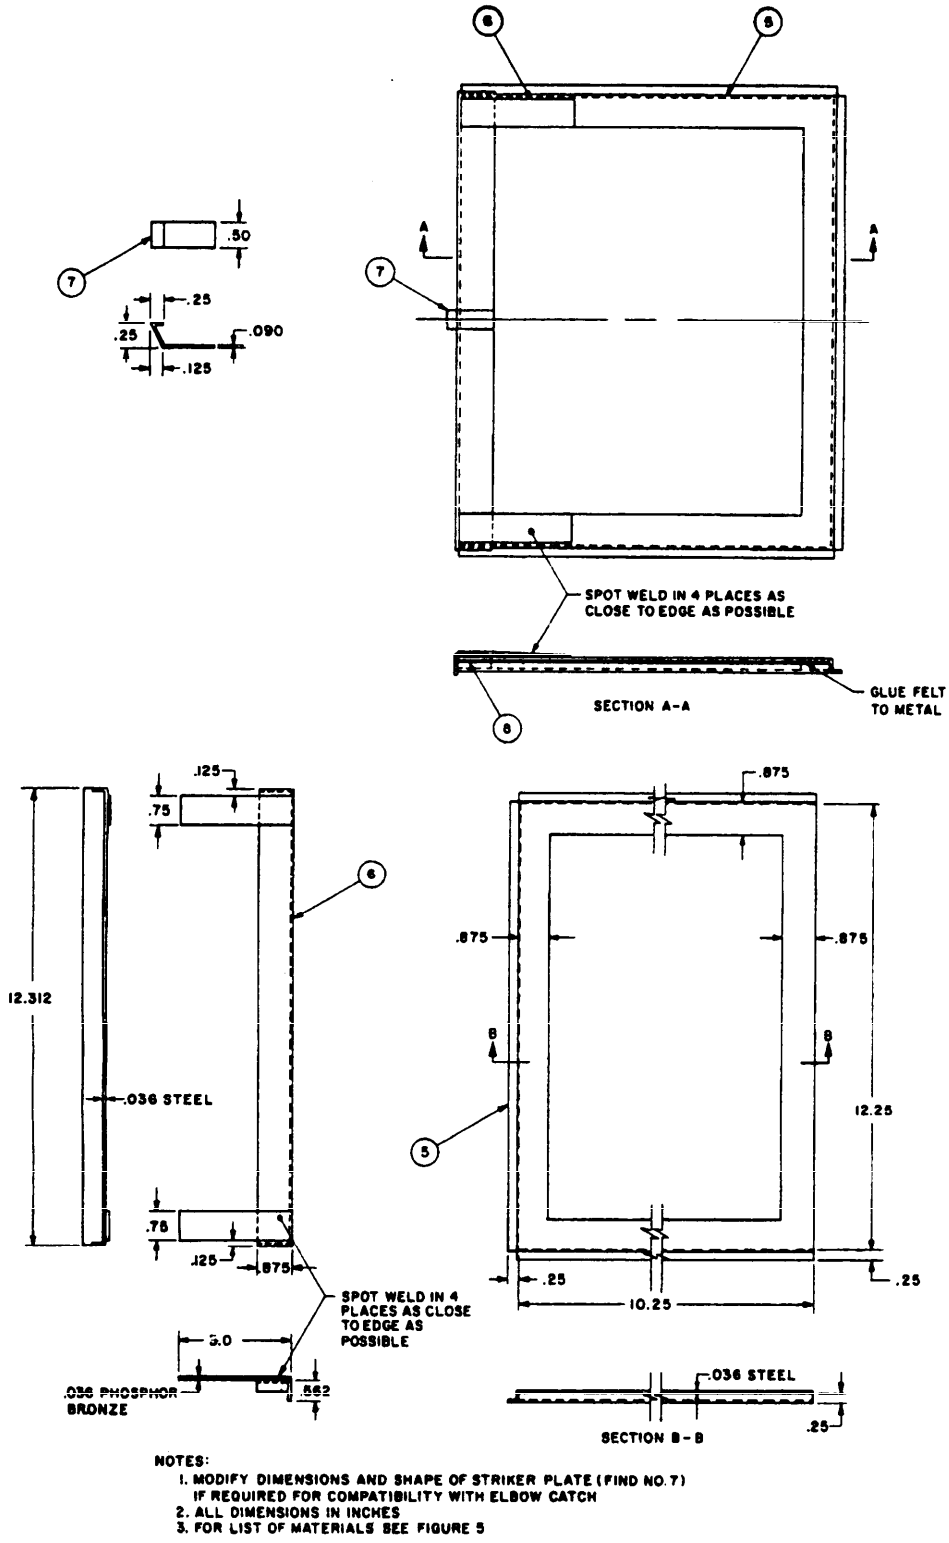


FIGURE 4. Filter frame assembly and details. X-2924

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

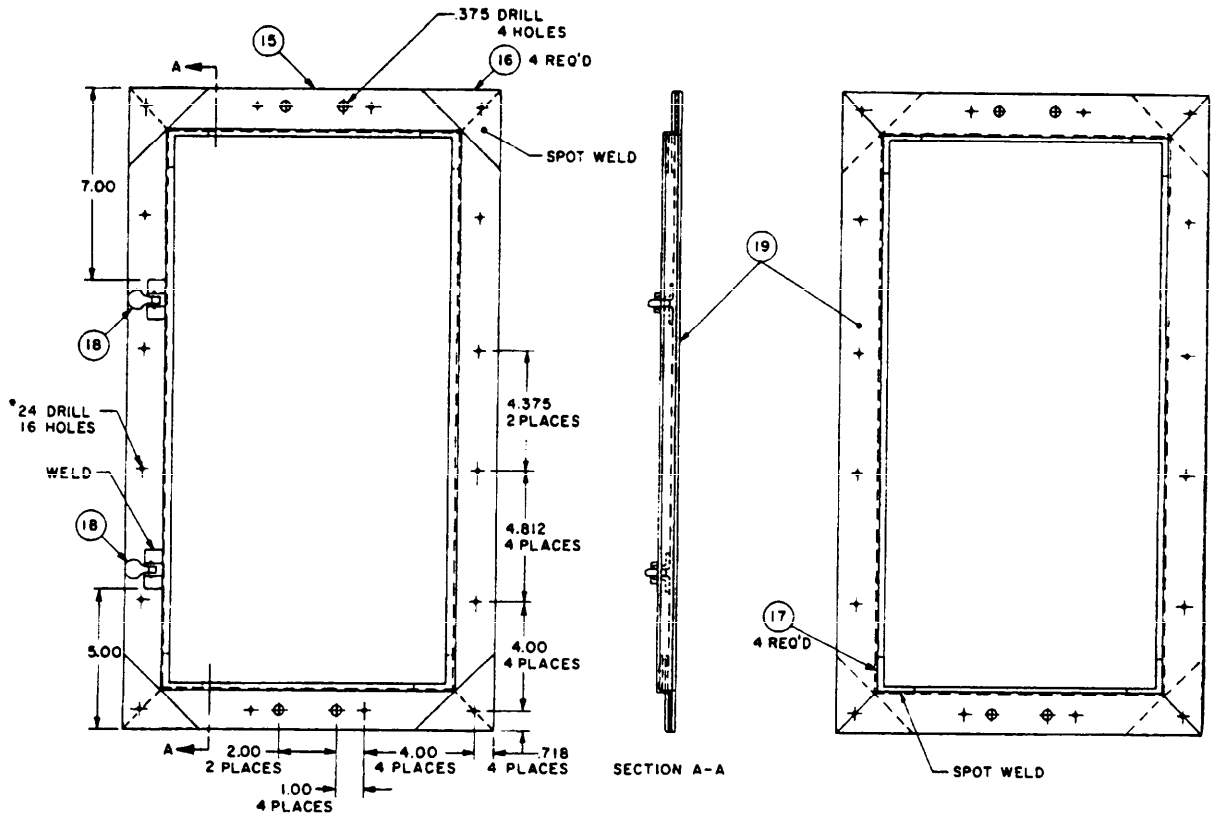


LIST OF MATERIALS			
FIND NO.	QUANT.	DESCRIPTION	MATERIALS
1	1	HINGE, 20 INCHES LONG	3.3
2	1	LIGHT DOOR	SHEET STEEL
3	1	SHUTTER COVER	SHEET STEEL
4	1	SPACER	SHEET STEEL
5	1	FILTER FRAME	SHEET STEEL
6	1	FILTER HOLDER	SHEET STEEL AND PHOSPHOR BRONZE STRIP 3.2.1 AND 3.2.2
7	1	STRIKER PLATE, FILTER FRAME ASSEMBLY	SHEET STEEL
8	1	FELT STRIP, 0.75 WIDE BY 42 INCHES LONG (APPROX.)	3.2.3
9	1	SHUTTER	SHEET STEEL
10	1	KNOB	BRASS
11	1	PIN	BRASS
12	1	STRIKER PLATE, LIGHT DOOR ASSEMBLY	SHEET STEEL
13	1	FLAT WASHER	CORROSION RESISTING STEEL
14	1	FELT STRIP, 0.75 WIDE BY 63 INCHES LONG (APPROX.)	3.2.3
15	1	LIGHT FRAME	SHEET STEEL
16	4	GUSSET	SHEET STEEL
17	4	ANGLE	SHEET STEEL
18	2	ELBOW CATCH	STEEL
19	1	FELT STRIP, 1.50 WIDE BY 70 INCHES LONG (APPROX.)	3.2.3

NOTE:
ALL DIMENSIONS IN INCHES

FIGURE 5. Light frame assembly.

X-2925

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

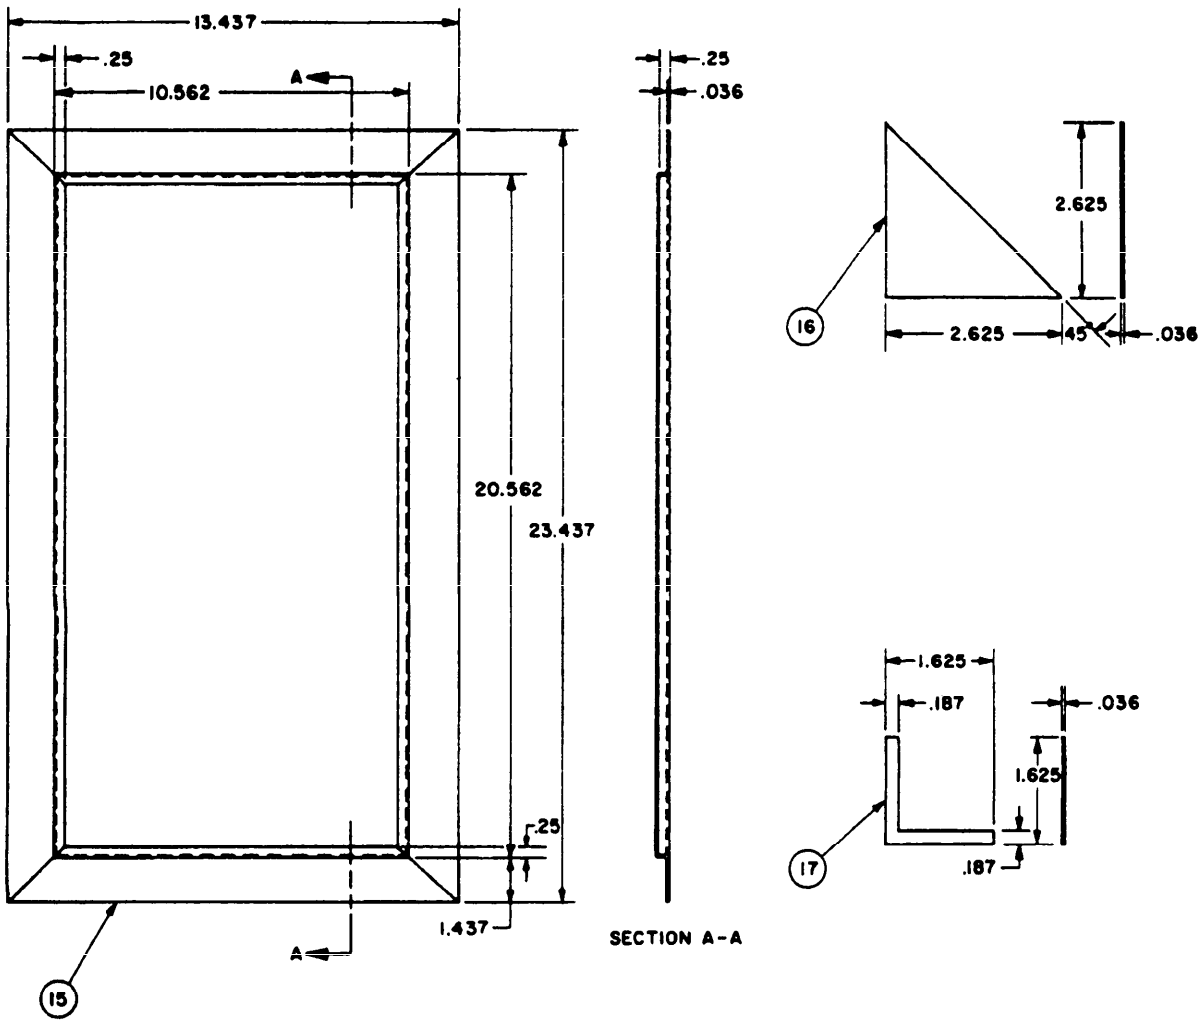

NOTES:
1. ALL DIMENSIONS IN INCHES
2. FOR LIST OF MATERIALS SEE FIGURE 5

FIGURE 6. Light frame assembly details.

X-2926

Source: https://assist.dla.mil -- Downloaded: 20260-22T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-F-52827A(ME) Frame: Safelight Filter, Photographic

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.