

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS
(AUDIO, POWER AND HIGH-POWER PULSE),
INDUCTOR, CHARGING, TF5S37ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the inductor described herein shall consist of this document and the latest issue of Specification MIL-T-27.

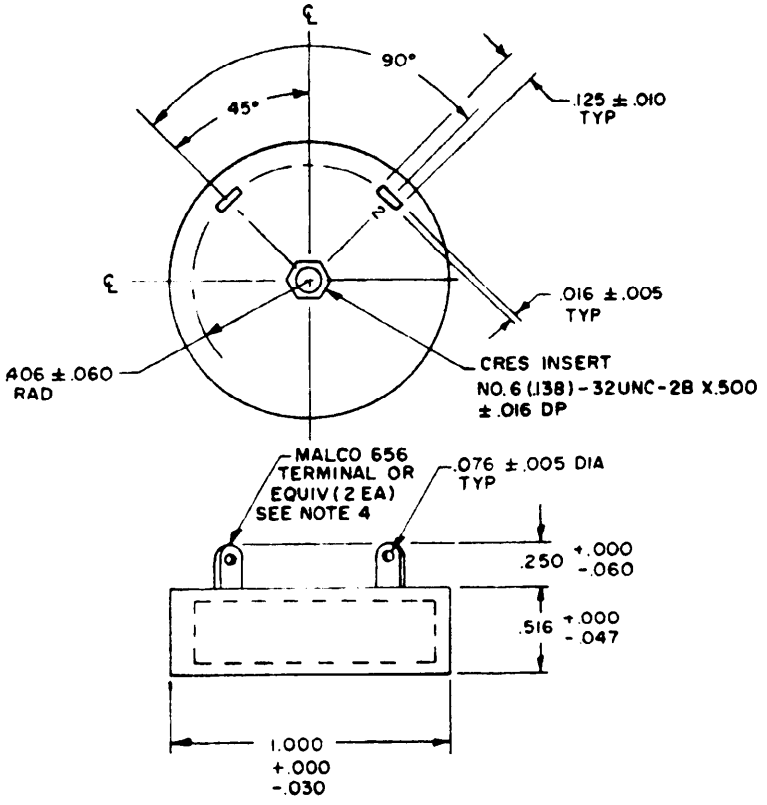



1.2 mH +6% -2%
.180 A dc
1 V@ 1 kHz
dcr MAX .51Ω

WV : 800 V maximum

CIRCUIT DIAGRAM AND MARKING

INCHES	MM
.005	.13
.010	.25
.016	.41
.030	.76
.047	1.19
.060	1.52
.076	1.93
.125	3.18
.250	6.35
.406	10.31
.500	12.70
.516	13.11
1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the side of the case.
4. Terminals shall be brass, 70% Cu, 30% Zn, per Federal Specification QQ-B-613.

FIGURE 1. Dimensions and configuration.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Inductance (1-2): 1.176 millihenries minimum to 1.272 millihenries maximum.
Voltage (1-2): 1.0 volt, rms, 1,000 hertz sine wave.
Current (1-2): 0.180 ampere dc.
Working voltage: 800 volts, maximum.

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Encapsulated.
Material: Epoxy.
Weight: 28.35 grams, maximum.
Terminals: Solder terminal, Malco No. 656 or equivalent.

Terminal height: $.250\ ^{+0.000}_{-0.060}$ inch.

Operating temperature range: -55° to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2.0 pounds.

Dielectric withstanding voltage (at sea level): 2,120 volts rms.

Electrical characteristics:
Inductance: With 1.0 volt rms, 1 kilohertz sine wave, and 0.180 ampere dc applied to (1-2), the inductance shall be 1.176 millihertz minimum to 1.272 millihertz maximum.
DC resistance (1-2): 0.51 ohm, maximum.

Vibration (high frequency): MIL-STD-202, method 204, test condition A.

Shock (specified pulse): MIL-STD-202, method 213, test condition H.

Marking location: See figure 1.

Part number: M27/233-01.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AM, WC, ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - EL

Agent:
DLA - ES

(Project 5950-0555-24)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22 R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve prompt procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-27/233 TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTOR, CHARGING, TF5S37ZZ

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.