
FED. SUP CLASS
4730

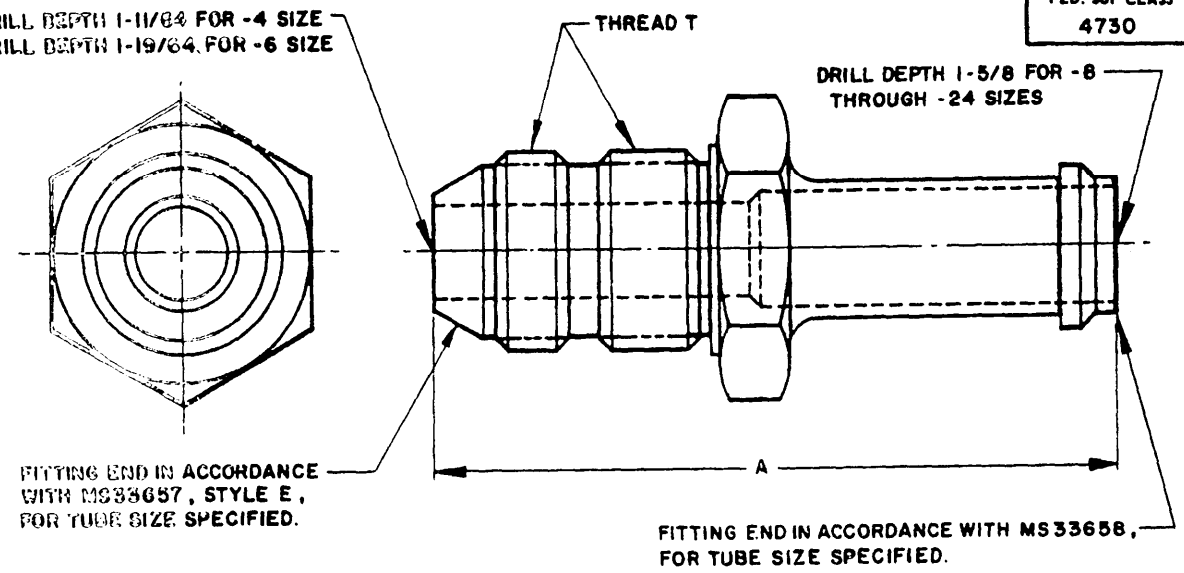

DASH NO.	TUBING OD AND HOSE ID	THREAD T (REF)	A
4	1/4	7/16-20UNJF-3A	2-13/16
6	3/8	9/16-18UNJF-3A	2-61/64
8	1/2	3/4-16UNJF-3A	3-7/64
10	5/8	7/8-14UNJF-3A	3-17/64
12	3/4	1-1/16-12UNJ-3A	3-31/64
16	1	1-5/16-12UNJ-3A	3-31/64
20	1-1/4	1-5/8-12UNJ-3A	3-17/32
24	1-1/2	1-7/8-12UNJ-3A	3-35/64

MATERIAL: COPPER ALLOY; ALUMINUM ALLOY; CORROSION RESISTANT STEEL (CRES); BARS, SHAPES, OR FORGINGS (SEE PROCUREMENT SPECIFICATIONS).
FINISH: SEE PROCUREMENT SPECIFICATION.
NO CODE LETTER IN PART NUMBER FOR COPPER ALLOY.
ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J AFTER DASH NUMBER FOR CRES, TYPE 304.
ADD K AFTER DASH NUMBER FOR CRES, TYPE 316.
ADD S AFTER DASH NUMBER FOR CRES, TYPE 347.
ADD W AFTER DASH NUMBER FOR 7075-T73 ALUMINUM ALLOY.
EXAMPLE OF PART NUMBERS: AN807-8 -ADAPTER, 1/2 TUBING, COPPER ALLOY.
AN807-8D -ADAPTER, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN807-8J -ADAPTER, 1/2 TUBING, CRES, TYPE 304.
AN807-8K -ADAPTER, 1/2 TUBING, CRES, TYPE 316.
AN807-8S -ADAPTER, 1/2 TUBING, CRES, TYPE 347.
AN807-8W -ADAPTER, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005.
USE IN MANNER INDICATED ON MS21344 AND AND10065.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 24 JUL 44 REVISED (1) 1 JUN 53 (2) 1 JUN 54 (3) 10 FEB 67 (4) 16 JUN 78 (5) 19 MAR 79 (6) 30AUG82

(6) ENTIRE STANDARD REVISED

P. A.
AIR FORCE 82
Other Cust
ARMY - AV
AF 99 (6)

INTERNATIONAL INTEREST

AIR FORCE-NAVY AERONAUTICAL STANDARD

ADAPTER, STRAIGHT, TUBE TO HOSE

AN807

PROCUREMENT SPECIFICATION
MIL-F-8809

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 4730-0315

USER ACTIVITIES:

REVIEWER ACTIVITIES
ARMY - MI
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 20260-26T14:16Z
Check the source to verify that this is the current version before use.