MIL-R-23285/1A(NAVY)
22 November 1965
SUPERSEDING
MIL-R-23285/1(NAVY)
29 November 1963
(See 6.2)

MILITARY SPECIFICATION

RESISTORS, VARIABLE, METAL FILM, NONWIREWOUND, STYLE RVC4

All interested bureaus of the Navy Department and the Marine Corps have concurred in the use of this specification.

1. SCOPE

1.1 Scope.- This specification covers the detail requirements for style RVC4 resistors.

2. APPLICABLE DOCUMENTS

2.1 The following specification, of the issue in effect on date of invitation for bids, forms a part of this specification to the extent specified herein:

SPECIFICATION

MILITARY

MIL-R-23285 - Resistors, Variable, Metal Film, Nonwirewound, General Specification for.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements.- Requirements shall be in accordance with MIL-R-23285, and as specified herein.

3.2 Design and construction.- Resistors shall be of the design, construction, and physical dimensions shown on figure 1.

3.2.1 Mounting and locking nuts.- The mounting nut shall be 3/32 inch thick and, unless otherwise specified, shall measure 1/2 inch across the hexagonal flats. The locking nuts shall be within the limits of 0.151 and 0.234 inch thick and shall measure 1/2 inch across the hexagonal flats. Thread size shall be 3/8-32NEF-2B.

3.2.2 Internal-tooth lockwasher.- An internal-tooth lockwasher of suitable size shall be supplied.

3.2.3 Retainer rings.- If retainer rings are used they shall be not thicker than 0.047 inch.

3.3 Total mechanical rotation.- The total mechanical rotation shall be within the limits of 309° and 320°.

3.4 Nominal total resistance and rated continuous working voltage.- The nominal total resistance and rated continuous working voltage (RCWV) shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202640-19T16:19Z
Check the source to verify that this is the currentversion before use.

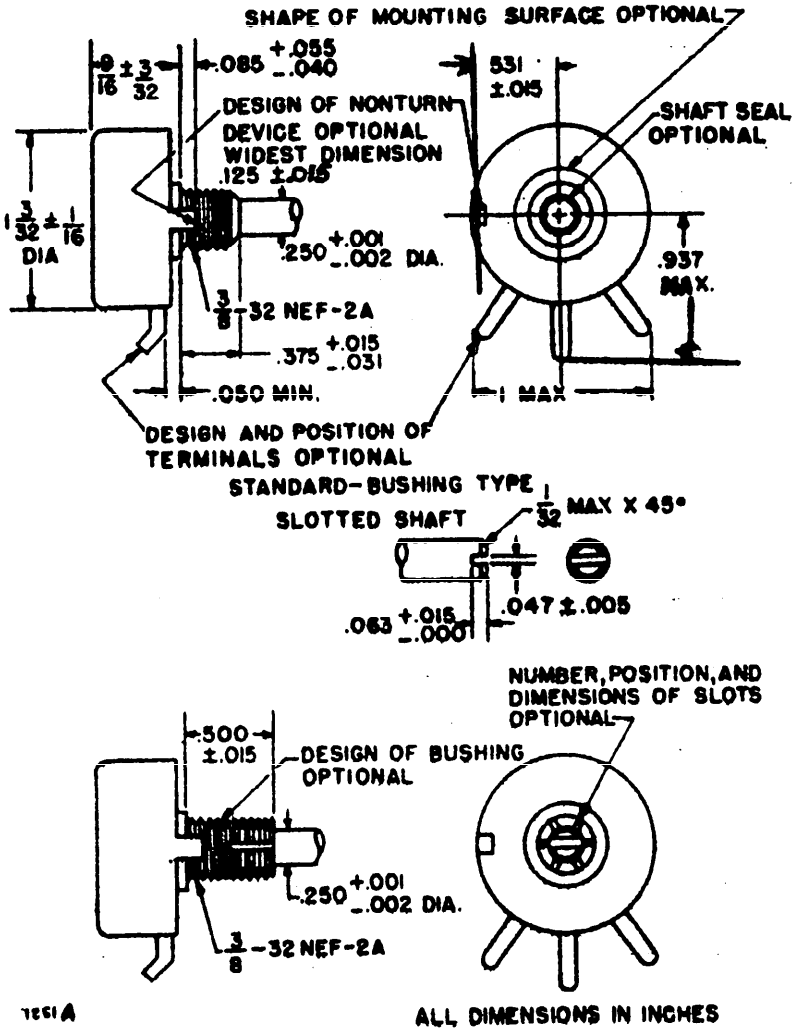


Figure 1 - Style RVC4 resistors.

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T16:19Z
Check the source to verify that this is the currentversion before use.

Table I - Nominal total resistance and rated continuous working voltage.

Nominal total resistance	RCWV[1/] (volts)		Nominal total resistance	RCWV[1/] (volts)		Nominal total resistance	RCWV[1/] (volts)	
	Taper A	Taper C		Taper A	Taper C		Taper A	Taper C
Ohms			Ohms			Megohms		
---	--	--	5,000	100	71	.10	445	316
100	14	--	7,500	122	87	.15	500	350
150	17	--	10,000	141	100	.25	500	350
250	22	--	15,000	173	123	.35	500	350
350	26	--	25,000	224	160	.50	500	350
500	32	--	35,000	264	187	.75	500	350
750	39	--	50,000	316	224	1.0	500	350
1,000	45	32	75,000	387	249	1.5	500	---
1,500	55	39	------	---	---	2.0	500	---
2,500	71	50	------	---	---	2.5	500	---
3,500	84	60						

[1/] Rated continuous working voltage at 125°C.

3.5 Maximum weight.- The maximum weight shall be 55 grams.

3.6 Power rating.- The power rating shall be 2 watts for taper-A resistors and 1 watt for taper-C resistors.

3.7 Torque.-

3.7.1 Operating.- The torque required to effect rotation shall be not less than 1 ounce-inch nor more than 6 ounce-inches.

3.7.2 Stops.- The torque applied through the operating shaft to the stops shall be 8 pound-inches.

3.7.3 Locking bushing.- For the locking bushing type, the locking nut shall be tightened with a torque of 10 pound-inches. After the locking nut is tightened, the contact arm shall not move when a torque of 30 ounce-inches is applied to the shaft.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection.- Sampling and inspection shall be in accordance with MIL-R-23285, and as specified herein.

4.2 Dielectric strength.- In the dielectric strength test, the applied potential at reduced barometric pressure shall be 450 volts, r.m.s.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-R-23285.

6. NOTES

6.1 Notes.- The notes specified in MIL-R-23285 are applicable to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:19Z
Check the source to verify that this is the current version before use.

6.2 Changes from previous issue.- The outside margins of this document have been marked "#" to indicate where changes (deletions, additions, etc.) from the previous issue have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - SH
(Project 5905-N033(NAVY))

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:19Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE 0-8879

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

CHIEF, BUREAU OF SHIPS
ATTN: CODE 621
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:19Z
Check the source to verify that this is the current version before use.