MIL-T-36012A
6 April 1967
SUPERSEDING
MIL-T-36012
12 December 1958

MILITARY SPECIFICATION

TRAY, OPHTHALMIC SHOP

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a plastic tray, suitable for use as a work tray in optical repair shops.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

PPP-B-585	Box, Wood, Wirebound.
PPP-B-601	Box, Wood, Cleated-Plywood.
PPP-B-621	Box, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.

Military

MIL-L-10547	Liners, Case, Waterproof.

FSC 6540

Source: https://assist.dla.mil -- Downloaded: 20261O-21T07:57Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-406 Plastics, Methods of Testing.

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Tray shall be made of high impact styrene or other suitable plastic material, and shall have the following minimum physical characteristics, when tested as specified in 4.4.

Nominal impact (foot pounds per inch notch).	2.1 (average).
Deflection temperature under load (Centigrade)	70°.
Tensile strength (pounds per square inch).	1,750 (average).

3.2 Construction. Construction of tray shall conform to style, design, and dimensions in accordance with figure 1.

3.2.1 Color. The color of the tray shall be gray.

3.3 Workmanship. Workmanship shall be first class throughout. All corners shall be rounded for increased strength and ease of cleaning. Tray shall be smooth and free from defects which detract from its appearance or may impair its serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, auditory, and investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:57Z
Check the source to verify that this is the current version before use.

4.1.2 Certificates of quality. When available, certificates of quality supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling. Sampling for examination and tests shall be conducted in accordance with MIL-STD-105, as indicated in table I.

Table I. Inspection and acceptable quality levels.

Examination and test.	Inspection level.	AQL (percent defective).	Minimum sample size.
For visual examination:			
Major A.	II	1.0	-
Total A.	II	4.0	-
Minor B.	II	2.5	-
For dimensional examination.	S-2	2.5	-
For end item testing each test (see 4.4).	S-1	*	3

*Acceptance number shall be zero for all sample sizes.

4.2.1 Where possible, the same sample unit shall be used for the determination of two or more test characteristics.

4.3 Examination. The tray shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Inspection shall be conducted in accordance with the following classification of defects:

Categories and defects **

Major A

101. Tray fails to bear evenly on a flat surface (without rocking or wobble).
102. Tray not free of cracked, distorted, pitted, or chipped areas and corners.
103. Tray not free of sharp edges and burs.
104. Trays fail to stack or nest into each other.
105. Color of tray not gray.

Minor A

201. Finish not smooth and free of excessively scratched areas.

Minor B (Unit of Inspection-Package)

251. Labels not legible and free of defacing marks, scratches, or tears.

** Inspection is not restricted to the listed defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:57Z
Check the source to verify that this is the current version before use.

4.3.2 Dimensional examination. The ophthalmic shop tray shall be inspected for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. The methods of testing the plastic material of the finished trays for compliance with the specified physical characteristics shall be in accordance with FED-STD-406, as follows:

Test	Test Method
Nominal impact.	1071 (using laminated specimen).
Deflection temperature under load.	2011 (except that the thickness of specimen shall be 0.090 inch ± 0.010 inch thick).
Tensile strength.	1011.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One tray, as specified, constitutes one unit.

5.1.2 Packaging quantities. The number of units of issue indicated in table II shall be packaged in each unit and exterior container, as applicable, for the required level of protection specified in procurement document.

Table II. Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	144 units

5.1.2.1 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit shall either be packaged in a carton of appropriate size and design, or shall be completely wrapped with kraft paper of suitable weight. Carton or wrapping shall be adequately secured to prevent accidental opening.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States.

Source: https://assist.dla.mil -- Downloaded: 202610-21T07:57Z
Check the source to verify that this is the currentversion before use.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for ype 2 load, and constructed in accordance with PPP-B-585, type 3, for class use; PPP-B-601, table II, using type III, class 1 plywood; PPP-B-621, able III; or PPP-B-636, type CF, class weather-resistant.

5.2.1.2 Case liner. Each level A wood box shall be lined with a water- roof case liner conforming to MIL-L-10547. Closure and sealing shall conform o applicable paragraphs of appendix thereto. Case liner shall not be required or fiberboard boxes.

5.2.1.3 Closure. Closure of wood boxes shall be in accordance with ppendix of applicable box specification. Closure of each fiberboard box hall be as specified in the appendix, and waterproofing shall conform to PP-B-636.

5.2.1.4 Strapping. Strapping, when required, shall be in accordance with ppendix of applicable box specification.

NOTE: Strapping shall not be required for shipments forwarded to a eceiving activity within the continental limits of the United States for torage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall conform to PPP-B-601, able I, using type III, class 1 plywood; or shall be designed for type 2 load, nd constructed in accordance with PPP-B-585, style 3, for class 2 use;PPP-B-621, able I; or PPP-B-636, type CF, class domestic and method I closure shall be utilized.

5.2.3 Level C. The subject commodity shall be packed in substantial mmercial containers of the type, size, and kind commonly used for the purpose, constructed as to insure acceptance and safe delivery by common or other rriers, at the lowest rate, to point of delivery called for in the contract purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package all be marked in accordance with MIL-STD-129. When labels are utilized, terproofing shall be required only when applicable carton is fabricated of ter-resistant material. Contract or purchase order number and name of ntractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance ith MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-21T07:57Z
Check the source to verify that this is the currentversion before use.

6. NOTES

6.1 Intended use. The tray covered by this specification is intended for use by the Military Medical Services as a work tray in optical repair shops.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Selection of applicable levels of packaging and packing (See 5.1 and 5.2).

6.3 This specification does not include all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the items which are normally procured to meet Military requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

CATEGORY: N

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:57Z
Check the source to verify that this is the current version before use.

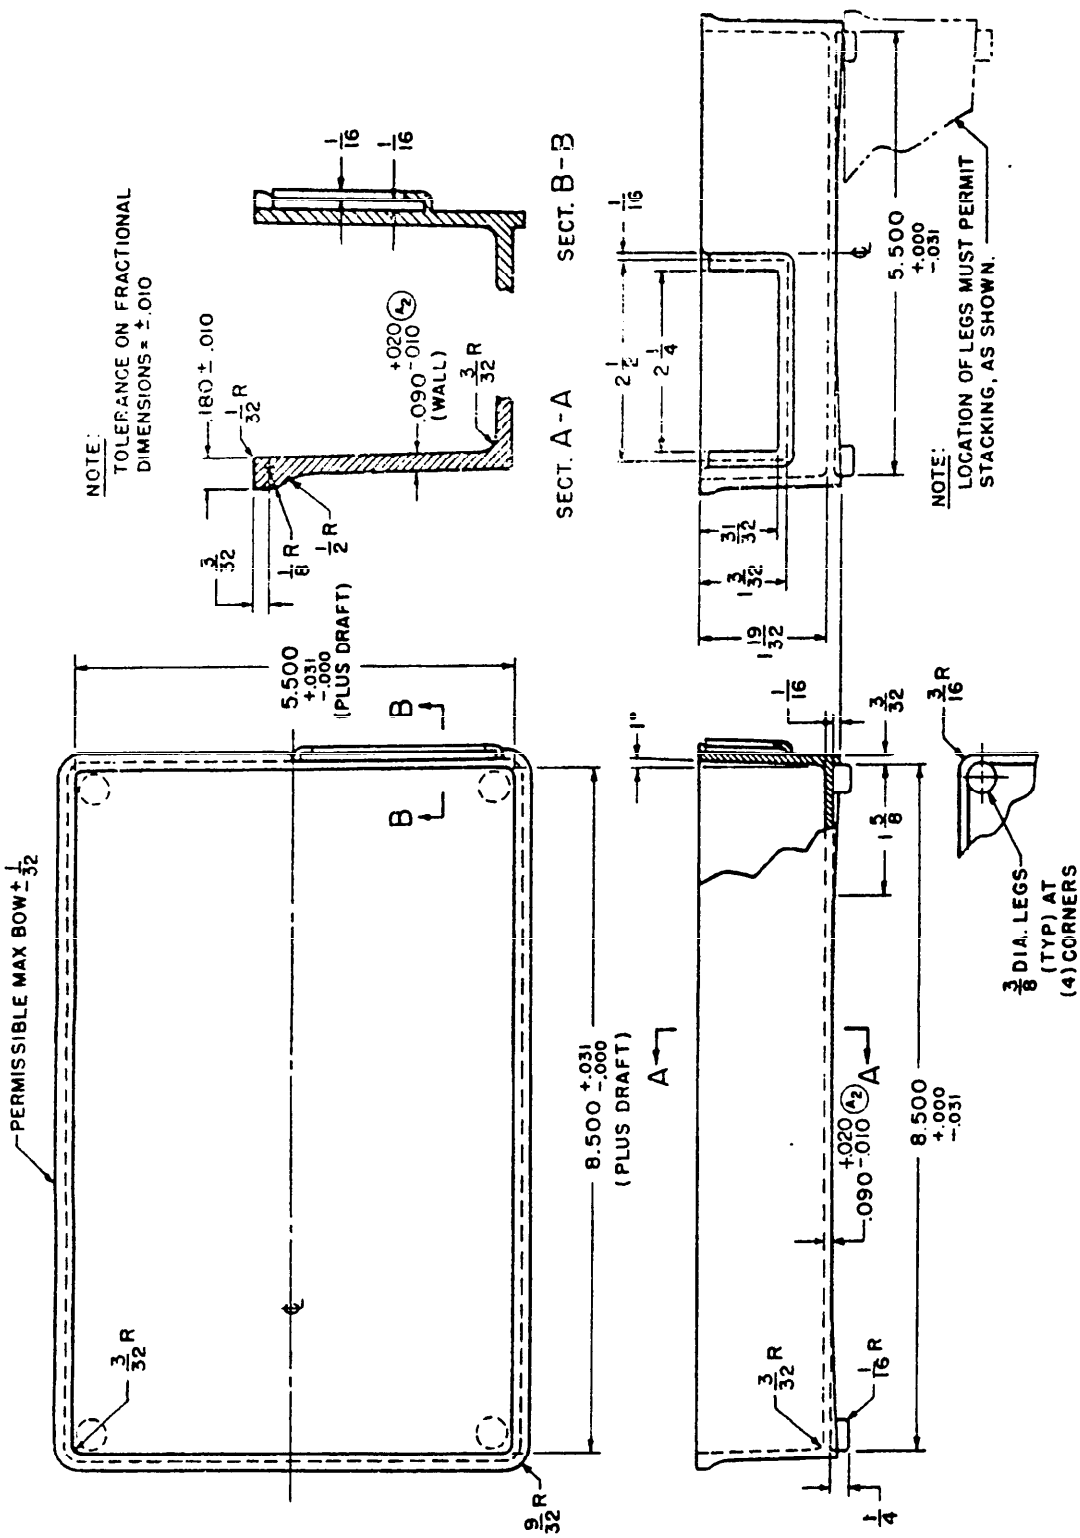


FIG. 1

Source: https://assist.dla.mil -- Downloaded: 202610-21T07:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
MIL-T-36012A

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64, WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T07:57Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

Fold

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

Fold

DPSC FORM 2418
AUG 66

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:57Z
Check the source to verify that this is the current version before use.